# OUTDOOR

LEDUNE®

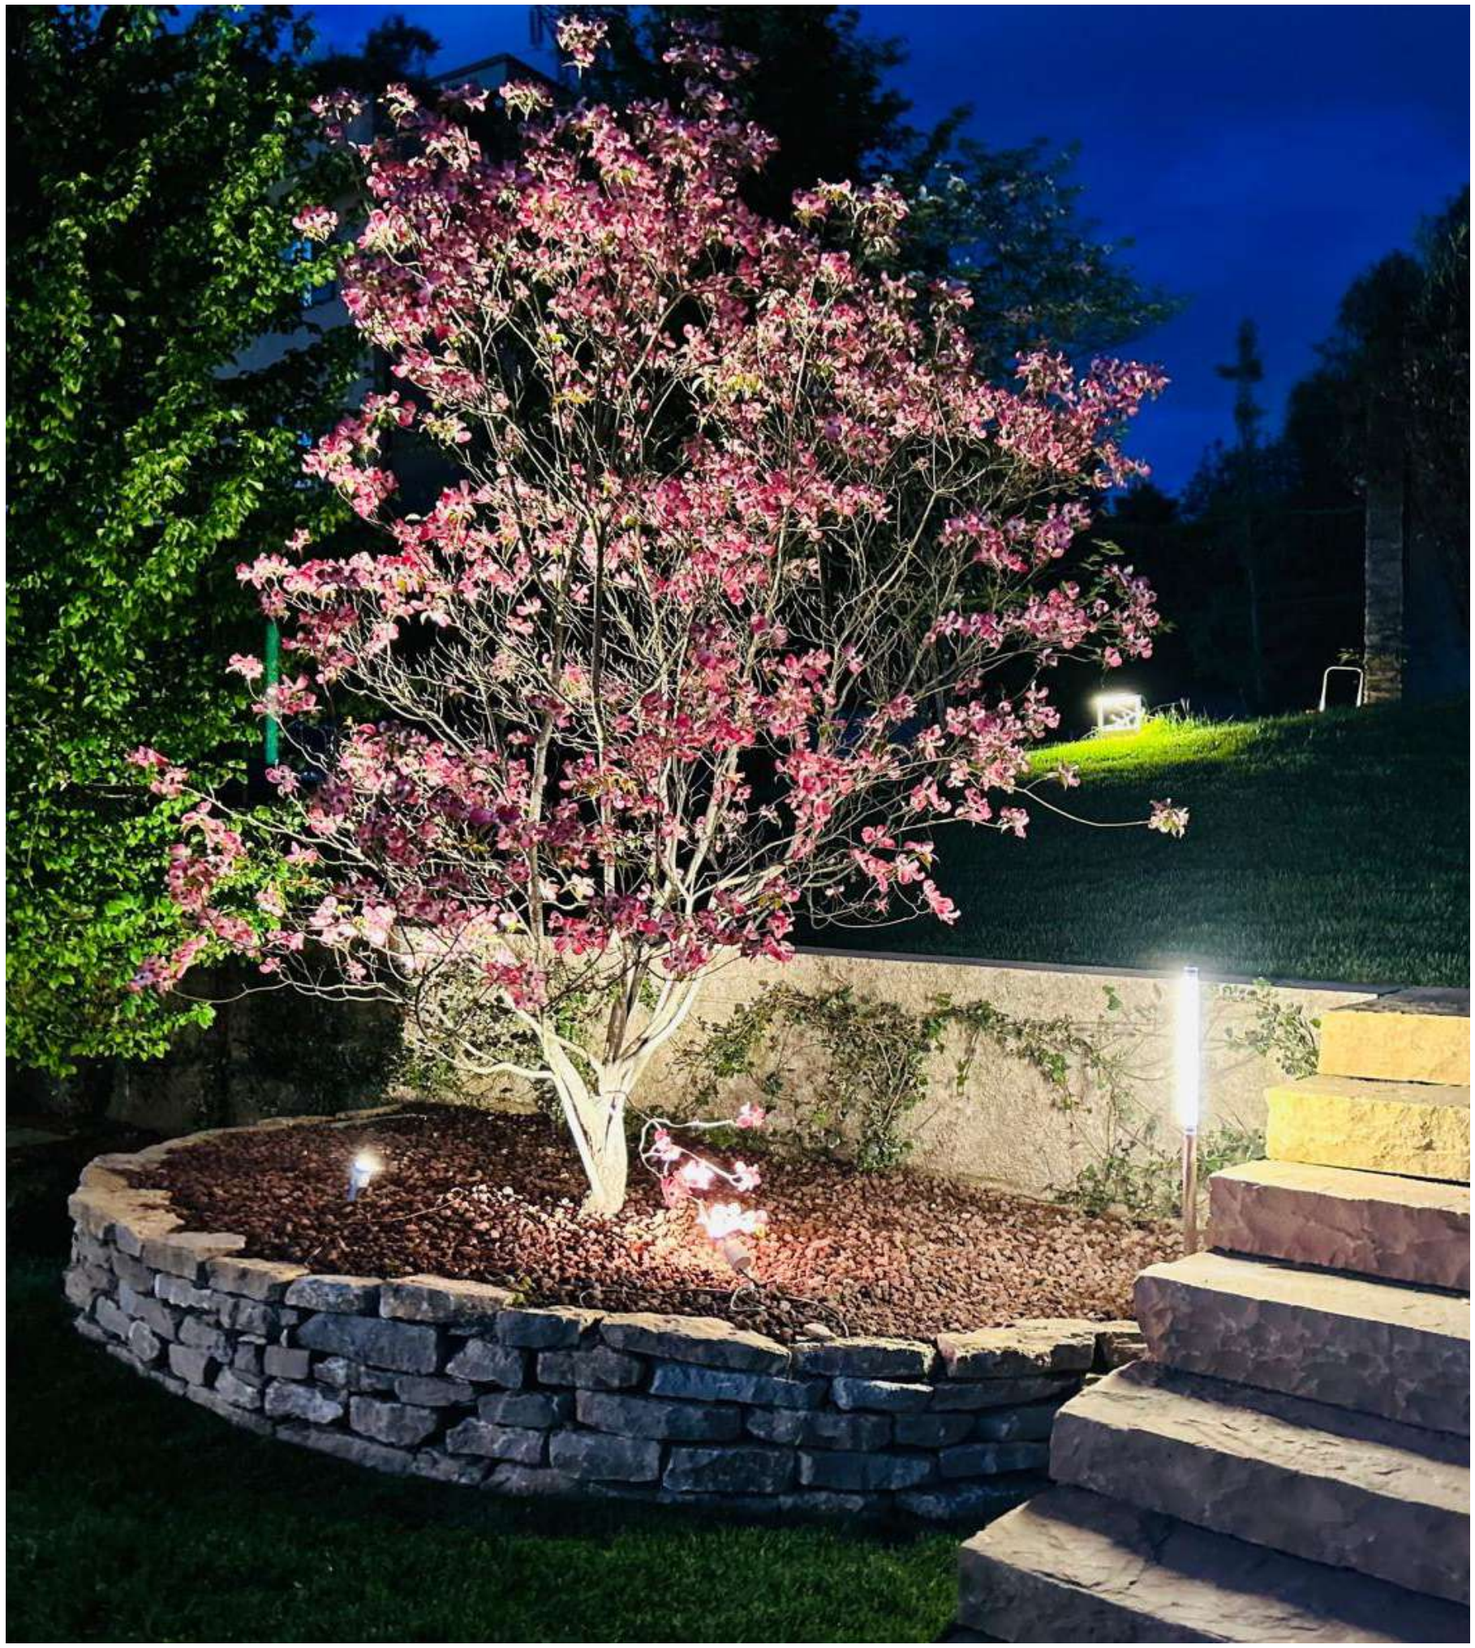

A good outdoor lighting design can really boost the vibe of a space and make people feel more comfortable and at ease. It can also bring out special architectural features, making the place even more inviting. But remember, outdoor lighting isn't just about looking pretty, it's mostly about safety. A well-lit environment helps people stay safe by clearly highlighting obstacles, stairs, and passageways.

*Un buon progetto di illuminazione esterna può davvero dare un impulso all'atmosfera di uno spazio e far sentire le persone più comode e a proprio agio. Può anche far risaltare particolari caratteristiche architettoniche, rendendo il luogo ancora più invitante. Ma ricordate che l'illuminazione esterna non riguarda solo l'aspetto estetico, ma soprattutto la sicurezza. Un ambiente ben illuminato aiuta le persone a stare al sicuro, evidenziando chiaramente ostacoli, scale e passaggi.*

# MATERIALS THAT MATTER: DURABILITY MEETS DESIGN

**MATERIALS**
*We are committed to creating products with a long-lasting life, and it all begins with the right materials.*

• **316L Stainless Steel and marine-grade brass** excel in coastal locales, where salt spray would corrode lesser metals within months. Their natural resistance to chlorides and humidity keeps fixtures looking pristine.

• **Marine grade coating** is a type of surface treatment designed to protect materials (usually metal or wood) from weathering, chemicals and UV radiation in marine or highly corrosive environments. Marine grade paint can last for years without the need for touch-ups.

• **Anodising aluminium** is an electrochemical treatment used to create a protective layer of aluminium oxide on the surface of the metal, making it more resistant to corrosion, wear, scratches and weathering. When we speak of 20 micron outdoor anodising, we are referring to a process specifically designed to offer durable protection in outdoor environments, including more aggressive ones such as coastal areas. Anodised aluminium can be coloured and retains its appearance over time.

• **UV-stabilized polycarbonate or ASA plastics** are your friend under relentless sun—they won't yellow, crack or become brittle over the seasons.

**IP**
When planning, always look for the IP code: the first digit (4–6) rates **dust and solid ingress**, the second (4–8) rates **water resistance**. Covered verandas might safely use IP44 fixtures, but pool decks and exposed walls should aim for IP65 or higher. And remember: a single compromised lens or cracked seal can let moisture in and drastically shorten a fixture's lifespan.

**MATERIALI**
*Lavoriamo per creare prodotti che durino a lungo, e tutto inizia con i materiali giusti.*

• **Acciaio inox 316L e ottone marino** sono ideali in ambienti costieri, dove la salsedine corroderà rapidamente materiali inferiori. Questi metalli resistono naturalmente ai cloruri e all'umidità.

• **Verniciatura "marine grade"** è un tipo di trattamento superficiale pensato per proteggere materiali (in genere metallo o legno) da agenti atmosferici, chimici e raggi UV in ambienti marini o altamente corrosivi. La vernice marine grade può durare anni senza necessità di ritocchi.

• **Anodizzazione dell'alluminio** è un trattamento elettrochimico che serve a creare uno strato protettivo di ossido di alluminio sulla superficie del metallo, rendendolo più resistente alla corrosione, ai graffi e agli agenti atmosferici. Quando si parla di anodizzazione per esterno a 20 micron, si fa riferimento a un processo specificamente progettato per offrire una protezione durevole in ambienti esterni, inclusi quelli più aggressivi come le zone costiere. Può essere colorato e mantiene l'aspetto a lungo nel tempo.

• **Policarbonato UV-stabilizzato o plastica ASA** sono la scelta giusta sotto il sole cocente: non ingialliscono né si spezzano col tempo.

**IP**
Controlla sempre il codice IP: la prima cifra (4–6) indica la protezione da **corpi solidi**, la seconda (4–8) da **liquidi**. Verande coperte possono utilizzare apparecchi IP44, ma per bordi piscina o pareti esposte serve almeno IP65. Ricorda: una sola guarnizione danneggiata può compromettere tutto il sistema.



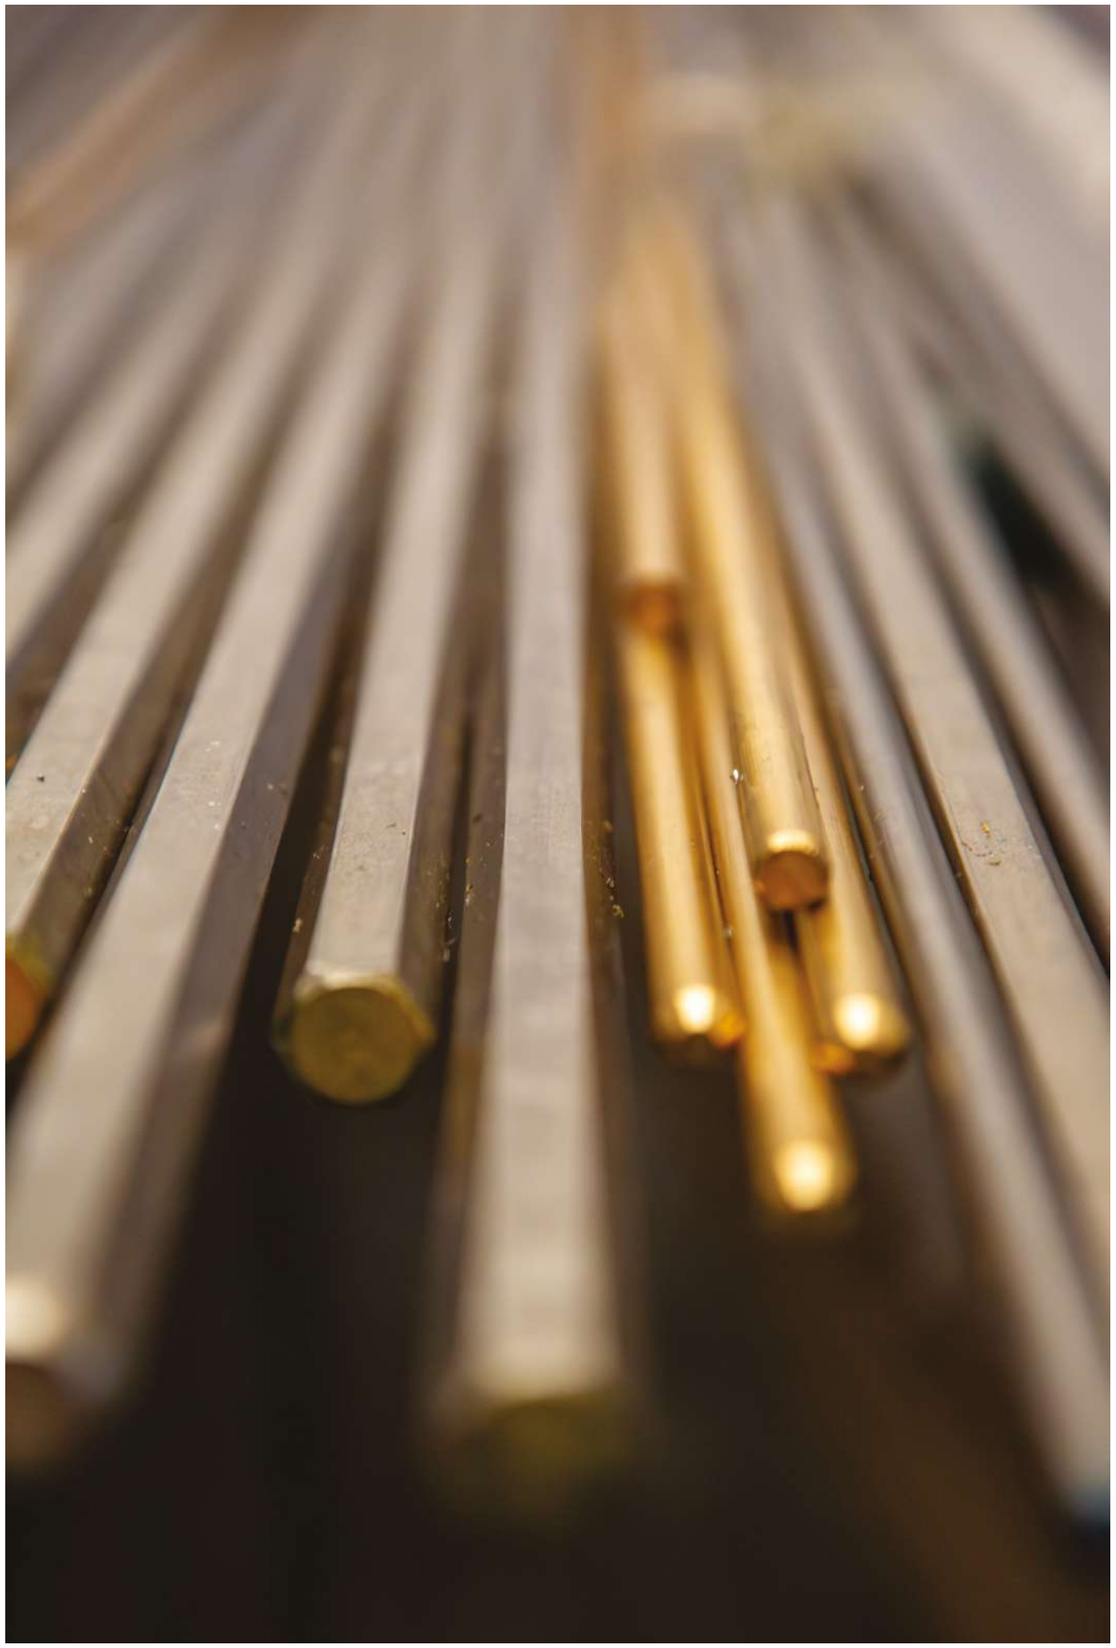

# LAYOUT

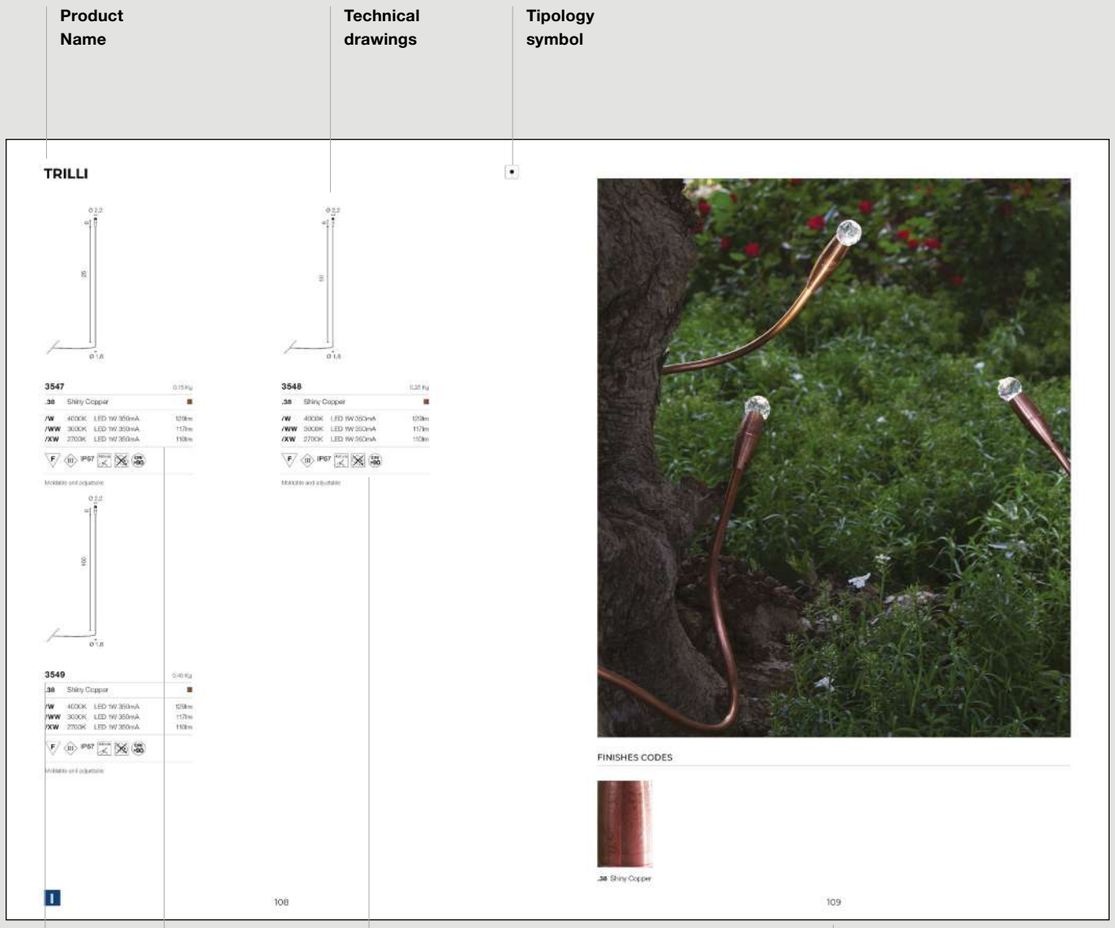


## PRODUCT SPECIFICATIONS

Characters in bold are used for codes and specifications which are necessary to identify the product code to be specified in the order.

I caratteri in grassetto sono utilizzati per i codici e le specifiche sono utilizzati per identificare il codice prodotto da includere nell'ordine.

## SYMBOLS

- Suspension
- Cable
- Track
- Wall
- Ceiling
- Recessed Wall
- Recessed Ceiling
- Table
- Floor
- Converter included
- Converter not included
- Cable length
- Dimmer included
- CRI Color Rendering Index
- Reparable fixture
- Rotation
- Beam angle
- IP65 Protection class
- Cut Out
- Walk over fitting
- Drive over fitting
- Surface Temperature

## MARKS

- Fixture on Class II, with double or reinforced insulation
- SELV fixture with remote transformer
- Fixture ready for installation on normally inflammable surfaces

## LIGHT COLOR CODES

| | |
|---|---|
| **/W** | Natural White Led 4000K |
| **/WW** | Warm white Led 3000K |
| **/XW** | Extra white Led 2700K |

## ACCESSORIES CODES

| | | | | |
|---|---|---|---|---|
| PUSH | **/DIM** | Dimmer | **/EM** | Emergency |
| 1...10V | **/DIM** | Dimmer | **/ST** | Satin diffuser |
| DALI | **/DALI** | Dimmer | **/TR** | Transparent diffuser |

## IP

*Protection class I = dust / P = water*

**1st digit:** protection against penetration by solid bodies

**0** No protection

**1** Protected against solid matters (over 50mm)

**2** Protected against solid matters (over 12mm)

**3** Protected against solid matters (over 2,5mm)

**4** Protected against solid matters (over 1mm)

**5** Dust proof

**6** Fully dust proof

**2nd digit:** protection against penetration by water

**0** No protection

**1** Protected against drops of water falling vertically

**3** Rain proof fixture

**4** Splash proof fixture

**5** Water jet proof

**6** Wave proof

**7** Watertight immersion fixture

# INDEX

## OUTDOOR

**Cerchio**
138

**Drive**
162

**Drum**
226

**Jazz**
214

**Eclipse IP**
122

**Kross**
146

**Kross Mini**
148

**Lara**
132

**Raccordi di luce Joy**
78

**Raccordi di luce Joy**
78

**Raccordi di luce Joy**
78

**Raccordi di luce Joy**
84

**Raccordi di luce Joy System**
86

**Raccordi di luce Joy System**
86

**Raccordi di luce Joy System**
90

**Roc**
220

**Soft**
174

**Spillo**
70

**Spook**
42




## OUTDOOR

**Step Mini**
180

**Trilli**
108

**Tris**
168

**Vision 01**
58

**Vision 02**
60

**Vision 03**
62

**Vista**
154

**Vista Mini**
156

**Wanda**
14

**Wanda System**
32

**Zeppelin Mini**
204

**Zeppelin Mini Plus**
206

**Zeppelin**
192

**Zeppelin Plus**
198

**Zeppelin Maxi COB**
202

**Zeppelin Maxi**
200

**Zeppelin Adjustable**
208

**IN**DOOR / **OUT**DOOR

# WANDA

Design U.T. Egoluce

# WANDA

IP67 adjustable light bar for wall and ceiling or suspension applications with diffused light made of transparent anti-UV coextruded methacrylate and terminals in stainless steel. Wanda is offered in different modular lengths from 18 cm up to 298 cm and in three shades of light, 2700K, 3000K, and 4000K, with CRI>90. This simple yet effective illumination offers creative solutions for various environments, from offices and kitchens to outdoor poolside and gardens.

*Barra luminosa orientabile IP67 per applicazioni a parete e a soffitto o a sospensione con luce diffusa in metacrilato coestruso trasparente anti-UV e terminali in acciaio inox. Wanda è disponibile in diverse lunghezze modulari da 18 cm a 298 cm e in tre tonalità di luce, 2700K, 3000K e 4000K, con CRI>90. Questa illuminazione semplice ma efficace offre soluzioni creative per diversi ambienti, da uffici e cucine a bordi di piscine e giardini esterni.*

*Verstellbarer IP67-Lichtbalken für Wand-, Decken- oder Hängeanwendungen mit diffusem Licht aus transparentem, UV-beständigem, koextrudiertem Methacrylat und Anschlüssen aus Edelstahl. Wanda wird in verschiedenen modularen Längen von 18 cm bis 298 cm und in drei Lichtfarben, 2700K, 3000K und 4000K, mit einem CRI>90 angeboten. Diese einfache, aber effektive Beleuchtung bietet kreative Lösungen für verschiedene Umgebungen, von Büros und Küchen bis hin zu Außenpools und Gärten.*

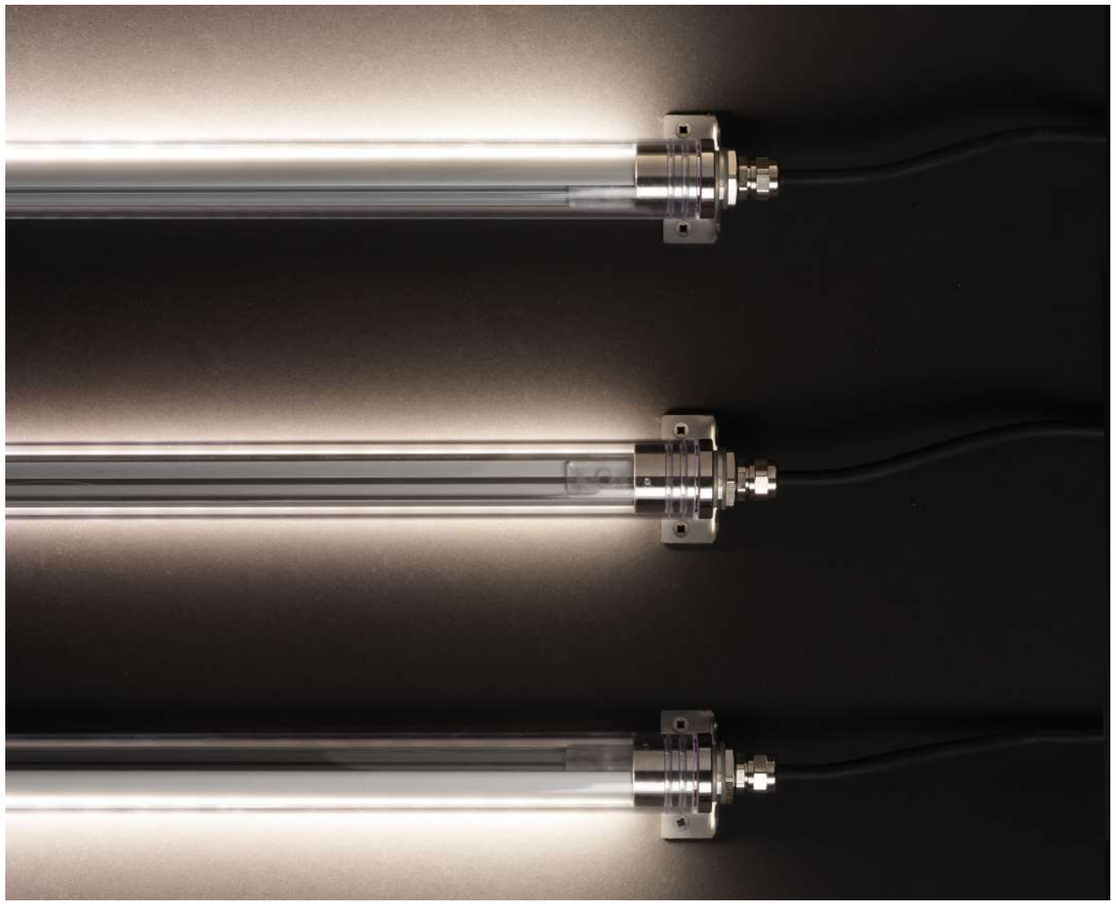

# WANDA




**4536.33/** 0,50 Kg

**.33** Stainless Steel AISI 316L

| | | | |
|---|---|---|---|
| **/W** | 4000K | LED 24V 7,5W | 920lm |
| **/WW** | 3000K | LED 24V 7,5W | 825lm |
| **/XW** | 2700K | LED 24V 7,5W | 780lm |

F III IP67 IK10 100 cm CRI >90

ETL version available upon request




**4537.33/** 1,00 Kg

**.33** Stainless Steel AISI 316L

| | | | |
|---|---|---|---|
| **/W** | 4000K | LED 24V 16,5W | 2024lm |
| **/WW** | 3000K | LED 24V 16,5W | 1815lm |
| **/XW** | 2700K | LED 24V 16,5W | 1716lm |

F III IP67 IK10 100 cm CRI >90

ETL version available upon request




**4538.33** 0,50 Kg

**.33** Stainless Steel AISI 316L

LED 24V 7,2W

F III IP67 IK10 100 cm CRI >90

ETL version available upon request




**4539.33** 1,00 Kg

**.33** Stainless Steel AISI 316L

LED 24V 16,5W

F III IP67 IK10 100 cm CRI >90

ETL version available upon request

## DRIVERS

**ON/OFF**

| Cod. | 0155 | 0156 | 0169 | 0157 | 0161/100 | 0161/150 |
|---|---|---|---|---|---|---|
| | 24V-13W | 24V-20W | 24V-60W | 24V-75W | 24V-100W | 24V-150W |

**IP67 DRIVERS**

| Cod. | 0033/IP | 0034/IP | 0038/IP | 0035/IP |
|---|---|---|---|---|
| | 24V 14,4W | 24V 70W | 24V 100W | 24V 160W |

**DIMMABLE DRIVERS**

| Cod. | 0717/DIM60/V | 0717/DIM60 | 0717/DIM100 | 0717/DIM150 |
|---|---|---|---|---|
| | 24V-60W **1... 10V** | 24V-60W **PUSH - DALI** | 24V-100W **1... 10V - PUSH - DALI** | 24V-150W **1... 10V - PUSH - DALI** |

**DIMMABLE DRIVERS - PHASE CUT-OFF**

| Cod. | 0727/DIM30 | 0727/DIM50 | 0717/DIM100/T | 0717/DIM150/T |
|---|---|---|---|---|
| | 24V-30W **TRIAC** | 24V-50W **TRIAC** | 24V-100W **TRIAC** | 24V-150W **TRIAC** |

Only Parallel Connection

**DRIVER RGB**

| 0164 | 0167 | 0163 | 0165 | 0166 |
|---|---|---|---|---|
| 120W | 22W | IR Sensor | IR Remote controller | Sync Cable |

IN 230V - OUT 3 X 24V

**LED EMERGENCY UNIT**

**0115/EM**

INVERTER + BATTERY + LED INDICATOR

## CUSTOM SIZE

Table of available lengths. Measures are referred to complete fixtures including closing heads.

| cm | watt | 2700K | lm | 3000K | lm | 4000K | lm | RGB |
|---|---|---|---|---|---|---|---|---|
| 18 | 1,5W | A4536.33/18/XW | 152 | A4536.33/18/WW | 165 | A4536.33/18/W | 184 | A4536.33/18RGB |
| 28 | 3W | A4536.33/28/XW | 312 | A4536.33/28/WW | 330 | A4536.33/28/W | 368 | A4536.33/28RGB |
| 38 | 4,5W | A4536.33/38/XW | 468 | A4536.33/38/WW | 495 | A4536.33/38/W | 552 | A4536.33/38RGB |
| 48 | 6W | A4536.33/48/XW | 624 | A4536.33/48/WW | 660 | A4536.33/48/W | 736 | A4536.33/48RGB |
| 58 | 7,5W | 4536.33/XW | 780 | 4536.33/WW | 825 | 4536.33/W | 920 | 4538.33 |
| 68 | 9W | A4536.33/68/XW | 936 | A4536.33/68/WW | 990 | A4536.33/68/W | 1104 | A4536.33/68RGB |
| 78 | 10,5W | A4536.33/78/XW | 1092 | A4536.33/78/WW | 1155 | A4536.33/78/W | 1288 | A4536.33/78RGB |
| 88 | 12W | A4536.33/88/XW | 1248 | A4536.33/88/WW | 1320 | A4536.33/88/W | 1472 | A4536.33/88RGB |
| 98 | 13,5W | A4536.33/98/XW | 1404 | A4536.33/98/WW | 1485 | A4536.33/98/W | 1656 | A4536.33/98RGB |
| 108 | 15W | A4536.33/108/XW | 1560 | A4536.33/108/WW | 1650 | A4536.33/108/W | 1840 | A4536.33/108RGB |
| 118 | 16,5W | 4537.33/XW | 1716 | 4537.33/WW | 1815 | 4537.33/W | 2024 | 4539.33 |
| 128 | 18W | A4536.33/128/XW | 1872 | A4536.33/128/WW | 1980 | A4536.33/128/W | 2208 | A4536.33/128RGB |
| 138 | 19,5W | A4536.33/138/XW | 2028 | A4536.33/138/WW | 2145 | A4536.33/138/W | 2392 | A4536.33/138RGB |
| 148 | 21W | A4536.33/148/XW | 2184 | A4536.33/148/WW | 2310 | A4536.33/148/W | 2576 | A4536.33/148RGB |
| 158 | 22,5W | A4536.33/158/XW | 2340 | A4536.33/158/WW | 2475 | A4536.33/158/W | 2760 | A4536.33/158RGB |
| 168 | 24W | A4536.33/168/XW | 2496 | A4536.33/168/WW | 2640 | A4536.33/168/W | 2944 | A4536.33/168RGB |
| 178 | 25,5W | A4536.33/178/XW | 2652 | A4536.33/178/WW | 2805 | A4536.33/178/W | 3128 | A4536.33/178RGB |
| 188 | 27W | A4536.33/188/XW | 2808 | A4536.33/188/WW | 2970 | A4536.33/188/W | 3312 | A4536.33/188RGB |
| 198 | 28,5W | A4536.33/198/XW | 2964 | A4536.33/198/WW | 3135 | A4536.33/198/W | 3496 | A4536.33/198RGB |
| 208 | 30W | A4536.33/208/XW | 3120 | A4536.33/208/WW | 3300 | A4536.33/208/W | 3680 | A4536.33/208RGB |
| 218 | 31,5W | A4536.33/218/XW | 3276 | A4536.33/218/WW | 3465 | A4536.33/218/W | 3864 | A4536.33/218RGB |
| 228 | 33W | A4536.33/228/XW | 3432 | A4536.33/228/WW | 3630 | A4536.33/228/W | 4048 | A4536.33/228RGB |
| 238 | 34,5W | A4536.33/238/XW | 3588 | A4536.33/238/WW | 3795 | A4536.33/238/W | 4232 | A4536.33/238RGB |
| 248 | 36W | A4536.33/248/XW | 3744 | A4536.33/248/WW | 3960 | A4536.33/248/W | 4416 | A4536.33/248RGB |
| 258 | 37,5W | A4536.33/258/XW | 3900 | A4536.33/258/WW | 4125 | A4536.33/258/W | 4600 | A4536.33/258RGB |
| 268 | 39W | A4536.33/268/XW | 4056 | A4536.33/268/WW | 4290 | A4536.33/268/W | 4784 | A4536.33/268RGB |
| 278 | 40,5W | A4536.33/278/XW | 4212 | A4536.33/278/WW | 4455 | A4536.33/278/W | 4968 | A4536.33/278RGB |
| 288 | 42W | A4536.33/288/XW | 4368 | A4536.33/288/WW | 4620 | A4536.33/288/W | 5152 | A4536.33/288RGB |
| 298 | 43,5W | A4536.33/298/XW | 4524 | A4536.33/298/WW | 4785 | A4536.33/298/W | 5336 | A4536.33/298RGB |

## FINISHES CODES

**.33** Stainless Steel AISI 316L

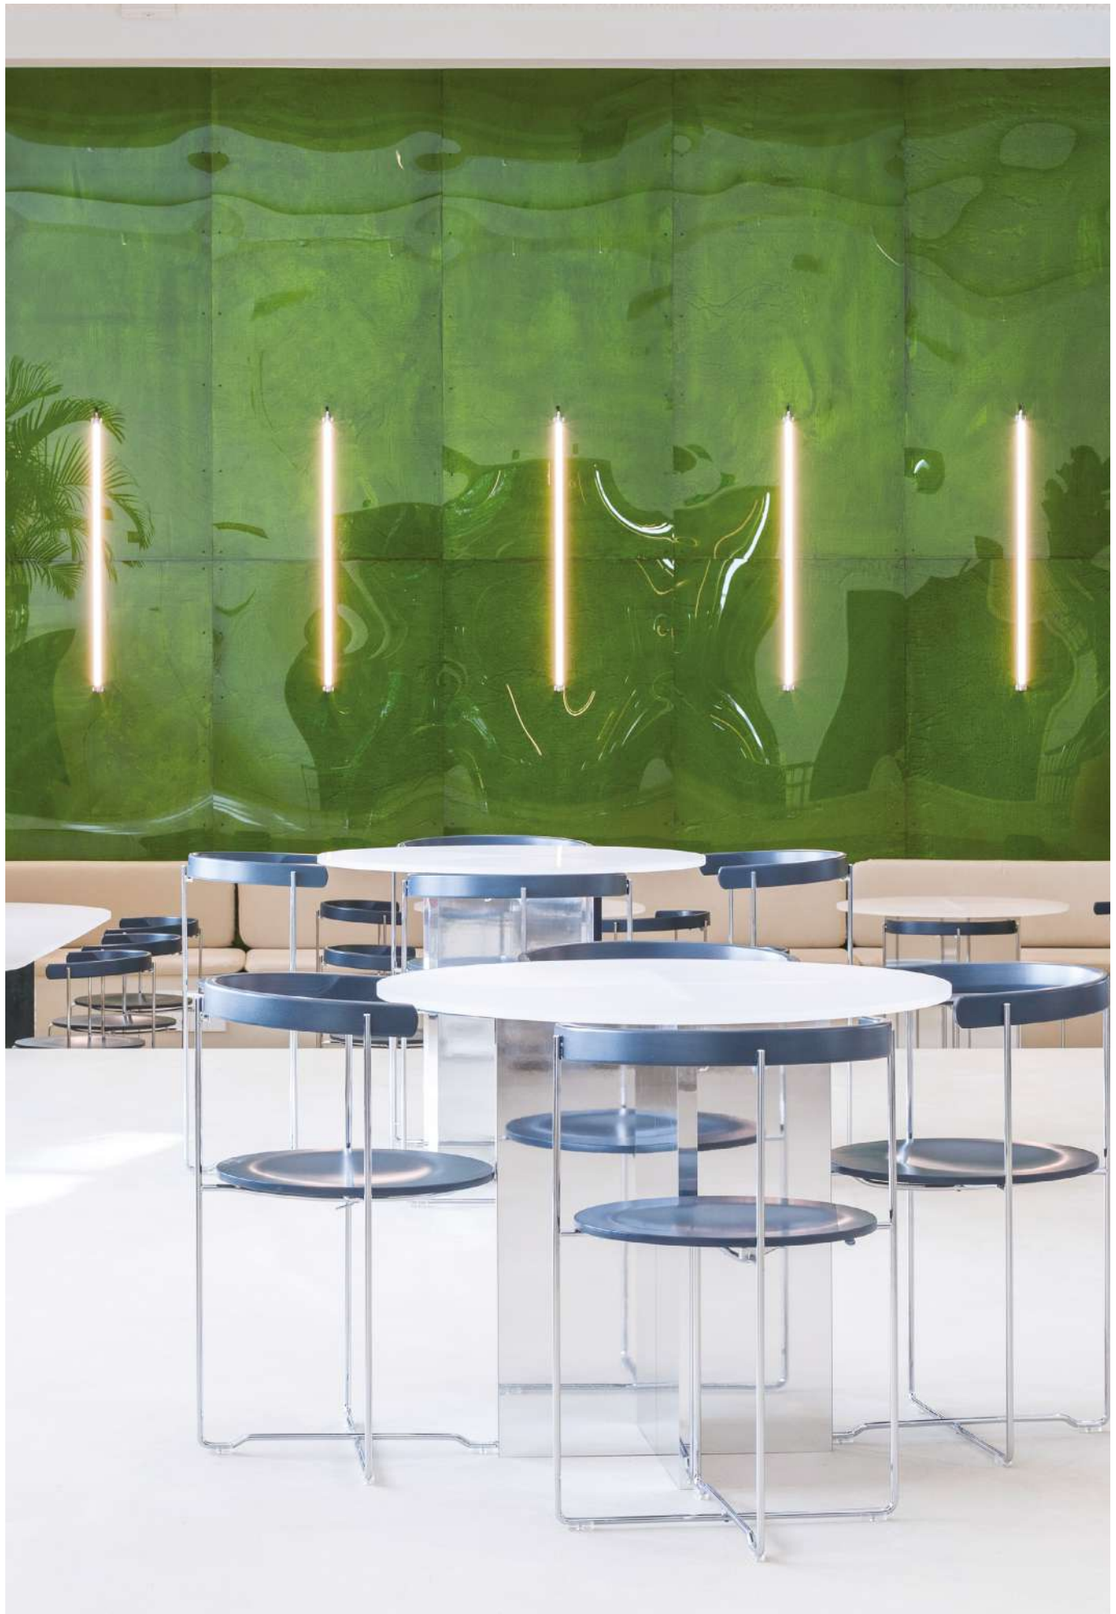

*Cobra studios design, HUGUES DELAUNAY & KENNY DECOMMER*

Cobra studios design, HUGUES DELAUNAY & KENNY DECOMMER

*Cobra studios design, HUGUES DELAUNAY & KENNY DECOMMER*

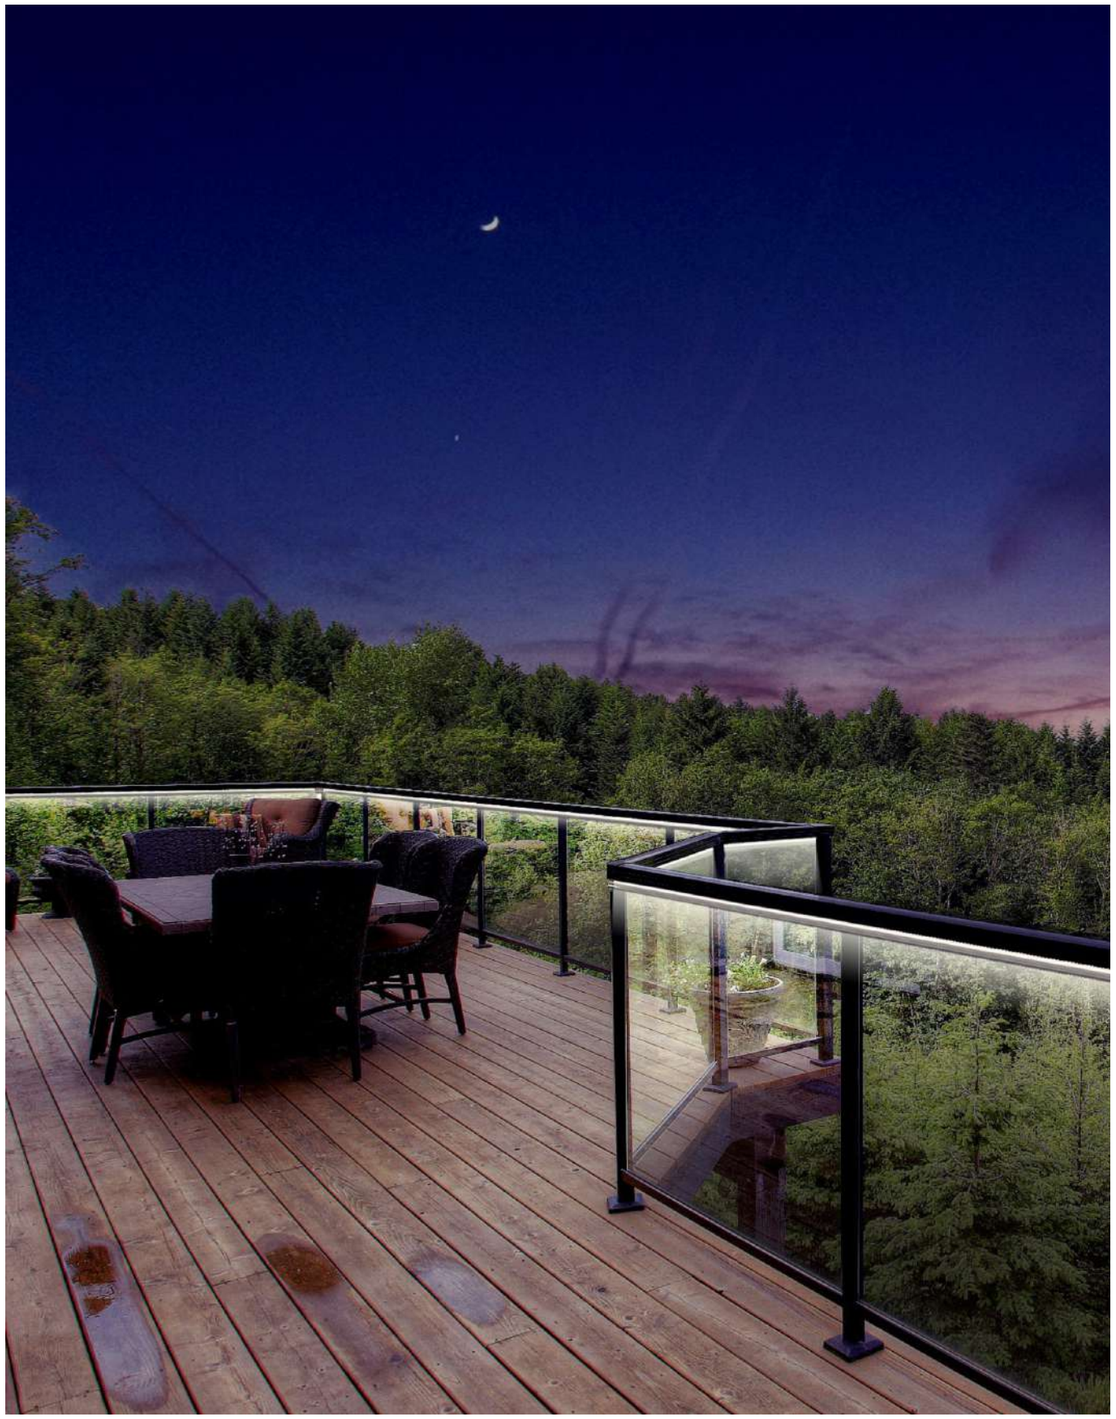

# WANDA SYSTEM




## 1665.33/128/ 1,10 Kg

**.33** Stainless Steel AISI 316L

| | | | |
|---|---|---|---|
| **/128/W** | 4000K | LED 24V 18W | 2208lm |
| **/128/WW** | 3000K | LED 24V 18W | 1980lm |
| **/128/XW** | 2700K | LED 24V 18W | 1872lm |

F III IP54 250 cm CRI >90

Suspension fixing kit supplied with the lamp




## 1665.33/178/ 1,53 Kg

**.33** Stainless Steel AISI 316L

| | | | |
|---|---|---|---|
| **/178/W** | 4000K | LED 24V 25,5W | 3128lm |
| **/178/WW** | 3000K | LED 24V 25,5W | 2805lm |
| **/178/XW** | 2700K | LED 24V 25,5W | 2652lm |

F III IP54 250 cm CRI >90

Suspension fixing kit supplied with the lamp

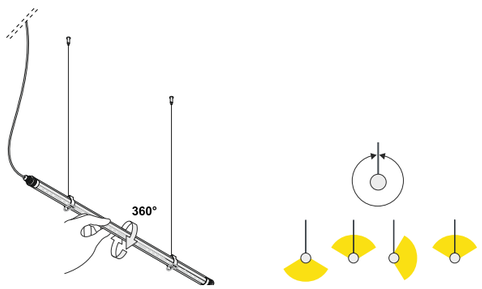





## 1665.33/158/ 1,36 Kg

**.33** Stainless Steel AISI 316L

| | | | |
|---|---|---|---|
| **/158/W** | 4000K | LED 24V 22,5W | 2760lm |
| **/158/WW** | 3000K | LED 24V 22,5W | 2475lm |
| **/158/XW** | 2700K | LED 24V 22,5W | 2340lm |

F III IP54 250 cm CRI >90

Suspension fixing kit supplied with the lamp




## 1665.33/208/ 1,79 Kg

**.33** Stainless Steel AISI 316L

| | | | |
|---|---|---|---|
| **/208/W** | 4000K | LED 24V 30W | 3680lm |
| **/208/WW** | 3000K | LED 24V 30W | 3300lm |
| **/208/XW** | 2700K | LED 24V 30W | 3120lm |

F III IP54 250 cm CRI >90

Suspension fixing kit supplied with the lamp



## FINISHES CODES

**.33** Stainless Steel AISI 316L



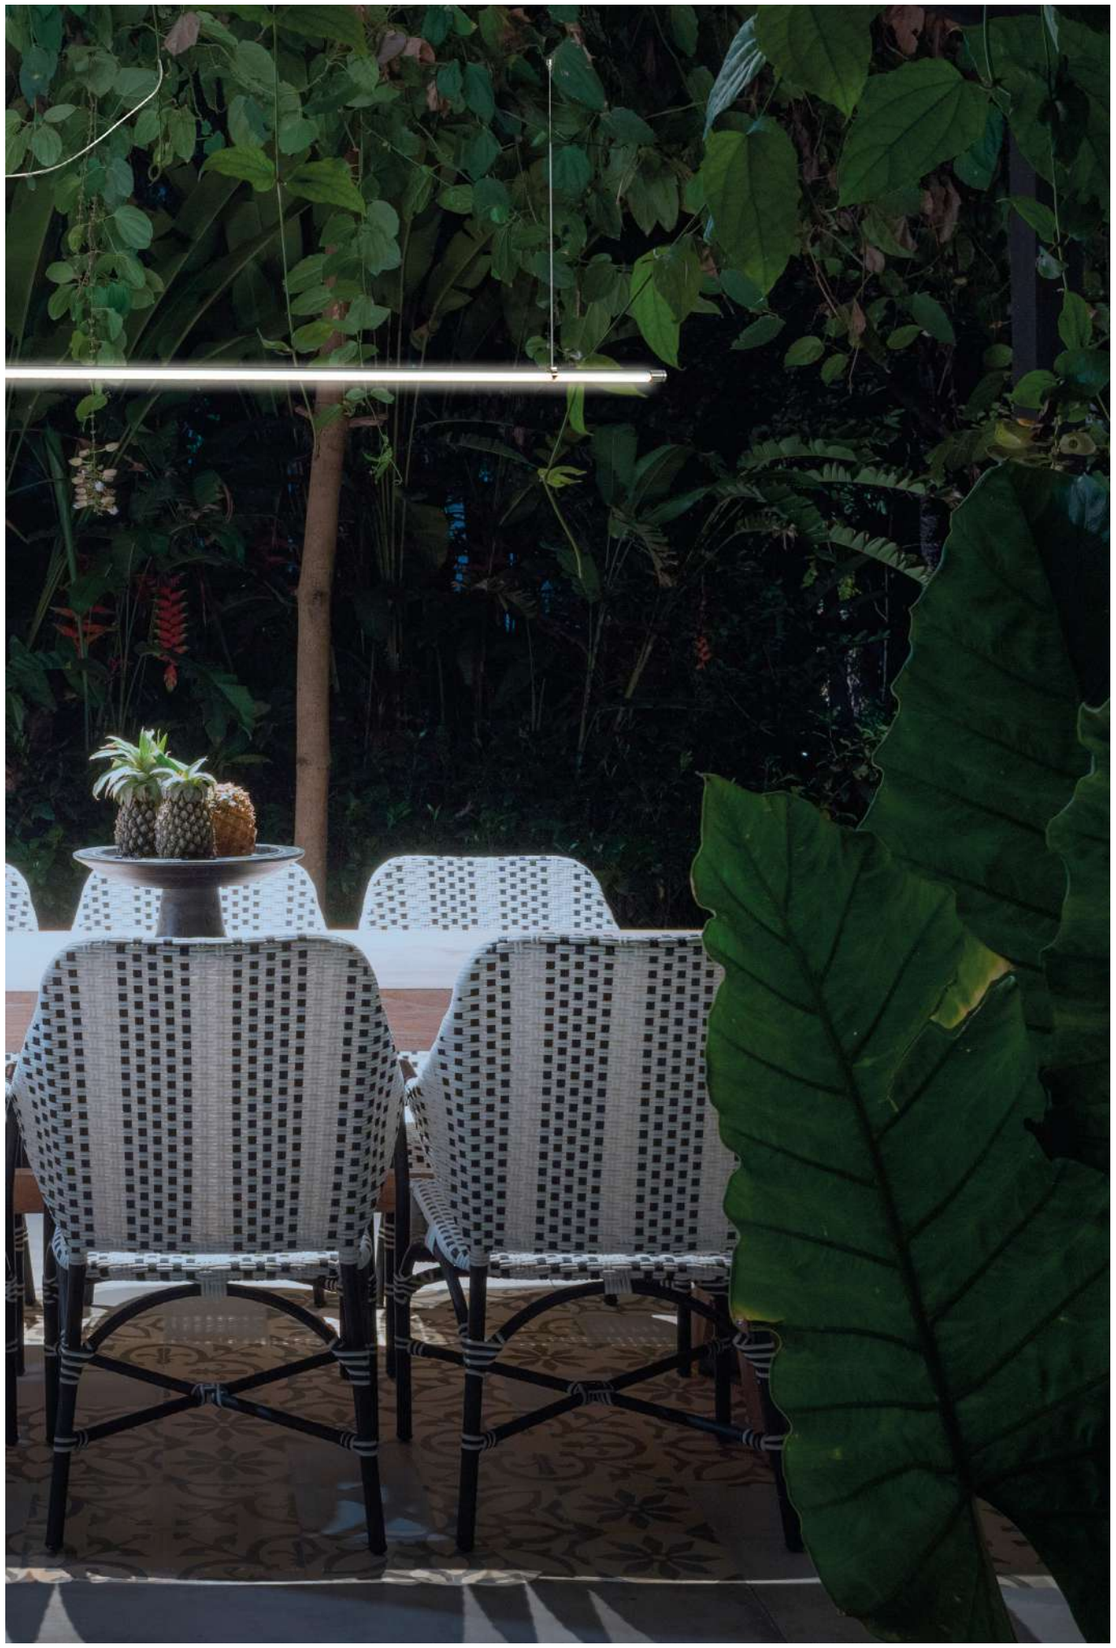

# CEILING ROSES FOR SUSPENSION SYSTEM 24V

WANDA system




Ceiling rose with **30W** driver — 50/60Hz 220-230V

**0990/30** — 0,50Kg

| | |
|---|---|
| **.01** | White |
| **.02** | Black |
| **.23** | Satin Aluminium |




Ceiling rose with **60W** driver — 50/60Hz 220-230V

**0990/60** — 0,70Kg

| | | | |
|---|---|---|---|
| **.01** | White | | |
| **.02** | Black | | |
| **.85** | Painted Silver | | |
| **.86** | Painted Gold | | |
| **.87** | Painted Copper | | |
| **.88** | Painted Bronze | | |
| **/P** | DIMMER | PUSH | MAX 60W |
| **/V** | DIMMER | 1...10V | MAX 60W |
| **/D** | DIMMER | DALI | MAX 60W |




Ceiling rose with **150W** driver — 50/60Hz 220-230V

**0990/150** — 1,30Kg

| | | | |
|---|---|---|---|
| **.01** | White | | |
| **.02** | Black | | |
| **.85** | Painted Silver | | |
| **.86** | Painted Gold | | |
| **.87** | Painted Copper | | |
| **.88** | Painted Bronze | | |
| **/P** | DIMMER | PUSH | MAX 150W |
| **/V** | DIMMER | 1...10V | MAX 150W |
| **/D** | DIMMER | DALI | MAX 150W |
| **/T** | DIMMER | TRIAC | MAX 150W |




Ceiling rose with **60W** driver — 50/60Hz 220-230V

**0993/60** — 0,60Kg

| | | |
|---|---|---|
| **.01** | White | |
| **.02** | Black with white base | |
| **/P** | DIMMER | PUSH |
| **/V** | DIMMER | 1...10V |
| **/D** | DIMMER | DALI |




Ceiling rose with **100W** driver — 50/60Hz 220-230V

**0990/100** — 1,30Kg

| | | | |
|---|---|---|---|
| **.01** | White | | |
| **.02** | Black | | |
| **.85** | Painted Silver | | |
| **.86** | Painted Gold | | |
| **.87** | Painted Copper | | |
| **.88** | Painted Bronze | | |
| **/P** | DIMMER | PUSH | MAX 100W |
| **/V** | DIMMER | 1...10V | MAX 100W |
| **/D** | DIMMER | DALI | MAX 100W |
| **/T** | DIMMER | TRIAC | MAX 100W |




Ceiling rose with **200W** driver — 50/60Hz 220-230V

**0990/200** — 2,00 kg

| | | | |
|---|---|---|---|
| **.01** | White | | |
| **.02** | Black | | |
| **.85** | Painted Silver | | |
| **.86** | Painted Gold | | |
| **.87** | Painted Copper | | |
| **.88** | Painted Bronze | | |
| **/P** | DIMMER | PUSH | MAX 2x100W |
| **/V** | DIMMER | 1...10V | MAX 2x100W |
| **/D** | DIMMER | DALI | MAX 2x100W |
| **/T** | DIMMER | TRIAC | MAX 2x100W |

OUTDOOR
SPOOK
Design U.T. Egoluce

# SPOOK

LED linear trampleable IP67 in coextruded transparent and opal methacrylate.
Modular anodized aluminium blind boxes (reinforced anodizing for outdoor).
To be installed into floor or wall and possibility to compose endless light lines.

*LED lineare calpestabile IP67 in metacrilato coestruso trasparente e opale.*
*Scatole cieche modulari in alluminio anodizzato (anodizzazione rinforzata per esterni).*
*Da installare a pavimento o a parete e possibilità di comporre infinite linee luminose.*

*Begehbarer LED Einbaulinie IP67, Struktur aus transparentem und opalisiertem fließgepresstem Methakrylat.*
*Modularen Einbaugehäuse aus Aluminium (verstärktem Eloxierung für Außenbereich) für wand-oder Bodeneinsetzung. Montage als endlose Linearsystem möglich.*

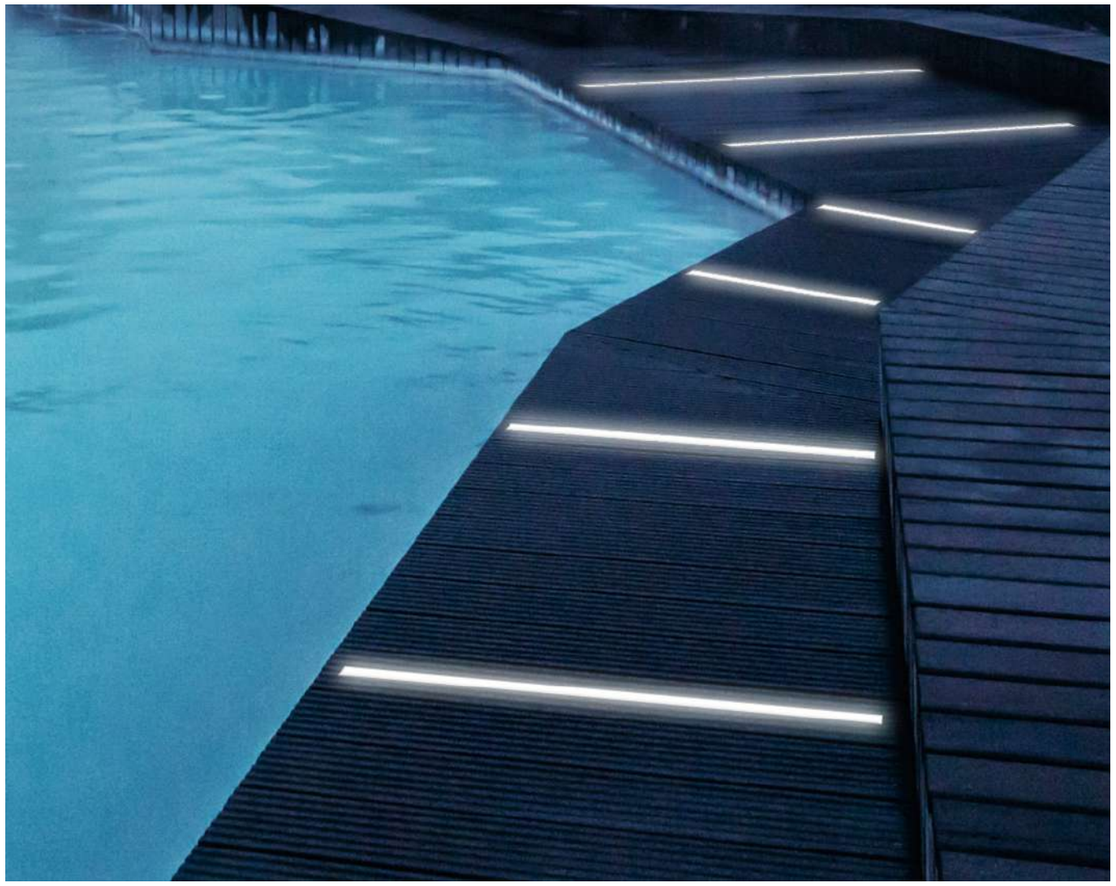

# SPOOK

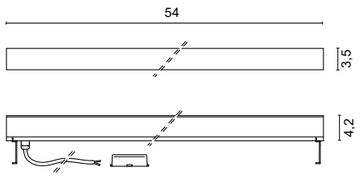


**6417** 0,80 Kg

| | | | |
|---|---|---|---|
| **.01** | White | | |
| **/W** | 4000K | LED 24V 4,8W | 540lm |
| **/WW** | 3000K | LED 24V 4,8W | 510lm |

F III IP67 IK10 1000 kg T< 40°C 50 cm

ETL version available upon request
IP67 connectoor included

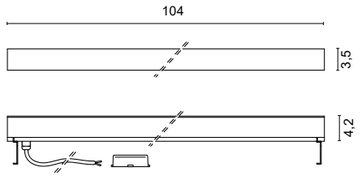


**6418** 1,60 Kg

| | | | |
|---|---|---|---|
| **.01** | White | | |
| **/W** | 4000K | LED 24V 9,6W | 1080lm |
| **/WW** | 3000K | LED 24V 9,6W | 1020lm |

F III IP67 IK10 1000 kg T< 40°C 50 cm

ETL version available upon request
IP67 connectoor included

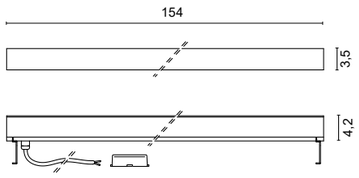


**6419** 2,30 Kg

| | | | |
|---|---|---|---|
| **.01** | White | | |
| **/W** | 4000K | LED 24V 14,4W | 1620lm |
| **/WW** | 3000K | LED 24V 14,4W | 1530lm |

F III IP67 IK10 1000 kg T< 40°C 50 cm

ETL version available upon request
IP67 connectoor included

## FINISHES CODES



**.01** White

## CUSTOM SIZE

Table of available lengths Measures are referred to complete fixtures including closing heads

| cm | watt | 3000K | lm | 4000K | lm |
|---|---|---|---|---|---|
| 14 | 1W | A6417.01/14/WW | 102 | A6417.01/14/W | 108 |
| 24 | 1,9W | A6417.01/24/WW | 204 | A6417.01/24/W | 216 |
| 34 | 2,9W | A6417.01/34/WW | 306 | A6417.01/34/W | 324 |
| 44 | 3,8W | A6417.01/44/WW | 408 | A6417.01/44/W | 432 |
| 54 | 4,8W | 6417.01/WW | 510 | 6417.01/W | 540 |
| 64 | 5,8W | A6417.01/64/WW | 612 | A6417.01/64/W | 648 |
| 74 | 6,7W | A6417.01/74/WW | 714 | A6417.01/74/W | 756 |
| 84 | 7,7W | A6417.01/84/WW | 816 | A6417.01/84/W | 864 |
| 94 | 8,6W | A6417.01/94/WW | 918 | A6417.01/94/W | 972 |
| 104 | 9,6W | 6418.01/WW | 1020 | 6418.01/W | 1080 |
| 114 | 10,6W | A6417.01/114/WW | 1122 | A6417.01/114/W | 1188 |
| 124 | 11,5W | A6417.01/124/WW | 1224 | A6417.01/124/W | 1296 |
| 134 | 12,5W | A6417.01/134/WW | 1326 | A6417.01/134/W | 1404 |
| 144 | 13,4W | A6417.01/144/WW | 1428 | A6417.01/144/W | 1512 |
| 154 | 14,4W | 6419.01/WW | 1530 | 6419.01/W | 1620 |

## DRIVERS

**ON/OFF**

| Cod. | 0155 | 0156 | 0157 | 0160 | 0161/100 | 0162 |
|---|---|---|---|---|---|---|
| | 24V-13W | 24V-20W | 24V-75W | 24V-60W | 24V-100W | 24V-150W |

**DIMMABLE**

| Cod. | 0717/DIM60 | 0717/DIM60/V | 0717/DIM100 |
|---|---|---|---|
| | 24V-60W PUSH - DALI | 24V-60W 1...10V | 24V-100W 1...10V - PUSH - DALI |

**IP67 DRIVER**

| Cod. | 0033/IP | 0034/IP | 0036/IP |
|---|---|---|---|
| | 24V 14,4W | 24V 70W | 24V 160W |

Only Parallel Connection

**LED EMERGENCY UNIT**

**0115/EM** INVERTER + BATTERY + LED INDICATOR

# SPOOK

## CONFIGURATION EXAMPLE

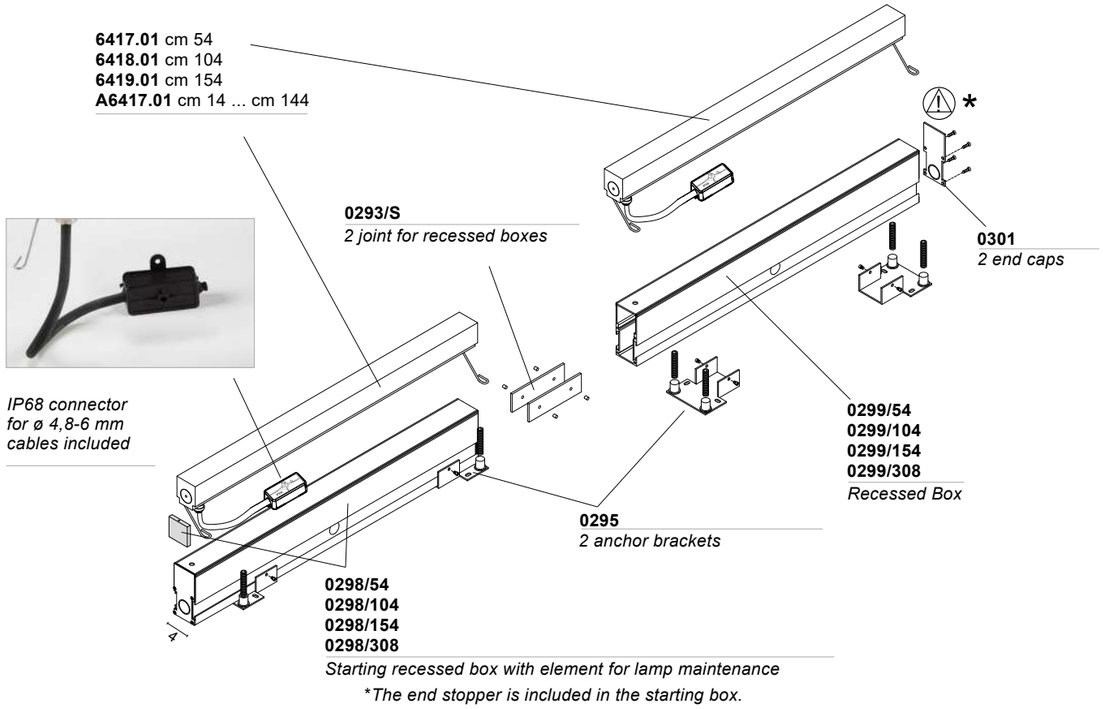


**The end stopper is included in the starting box.*

## ACCESSORIES

Element
**0298**

Starting recessed box with caps and element for lamp maintenance.

| | | |
|---|---|---|
| **/54** | 55,1 X 4 X 9 cm | 0,9 kg |
| **/104** | 105,1 X 4 X 9 cm | 1,7 kg |
| **/154** | 155,1 X 4 X 9 cm | 2,6 kg |
| **/308** | 309,1 X 4 X 9 cm | 5,7 kg |

Element
**0299**

Recessed box
The end stoppers are included in the starting box

| | | |
|---|---|---|
| **/54** | 55,1 X 4 X 9 cm | 0,8 kg |
| **/104** | 105,1 X 4 X 9 cm | 1,6 kg |
| **/154** | 155,1 X 4 X 9 cm | 2,5 kg |
| **/308** | 309,1 X 4 X 9 cm | 5,7 kg |

Element
**0295**

2 anchor brackets for recessed box

Element
**0293/S**

2 joints for recessed box

Element
**0301**

2 end caps for recessed box



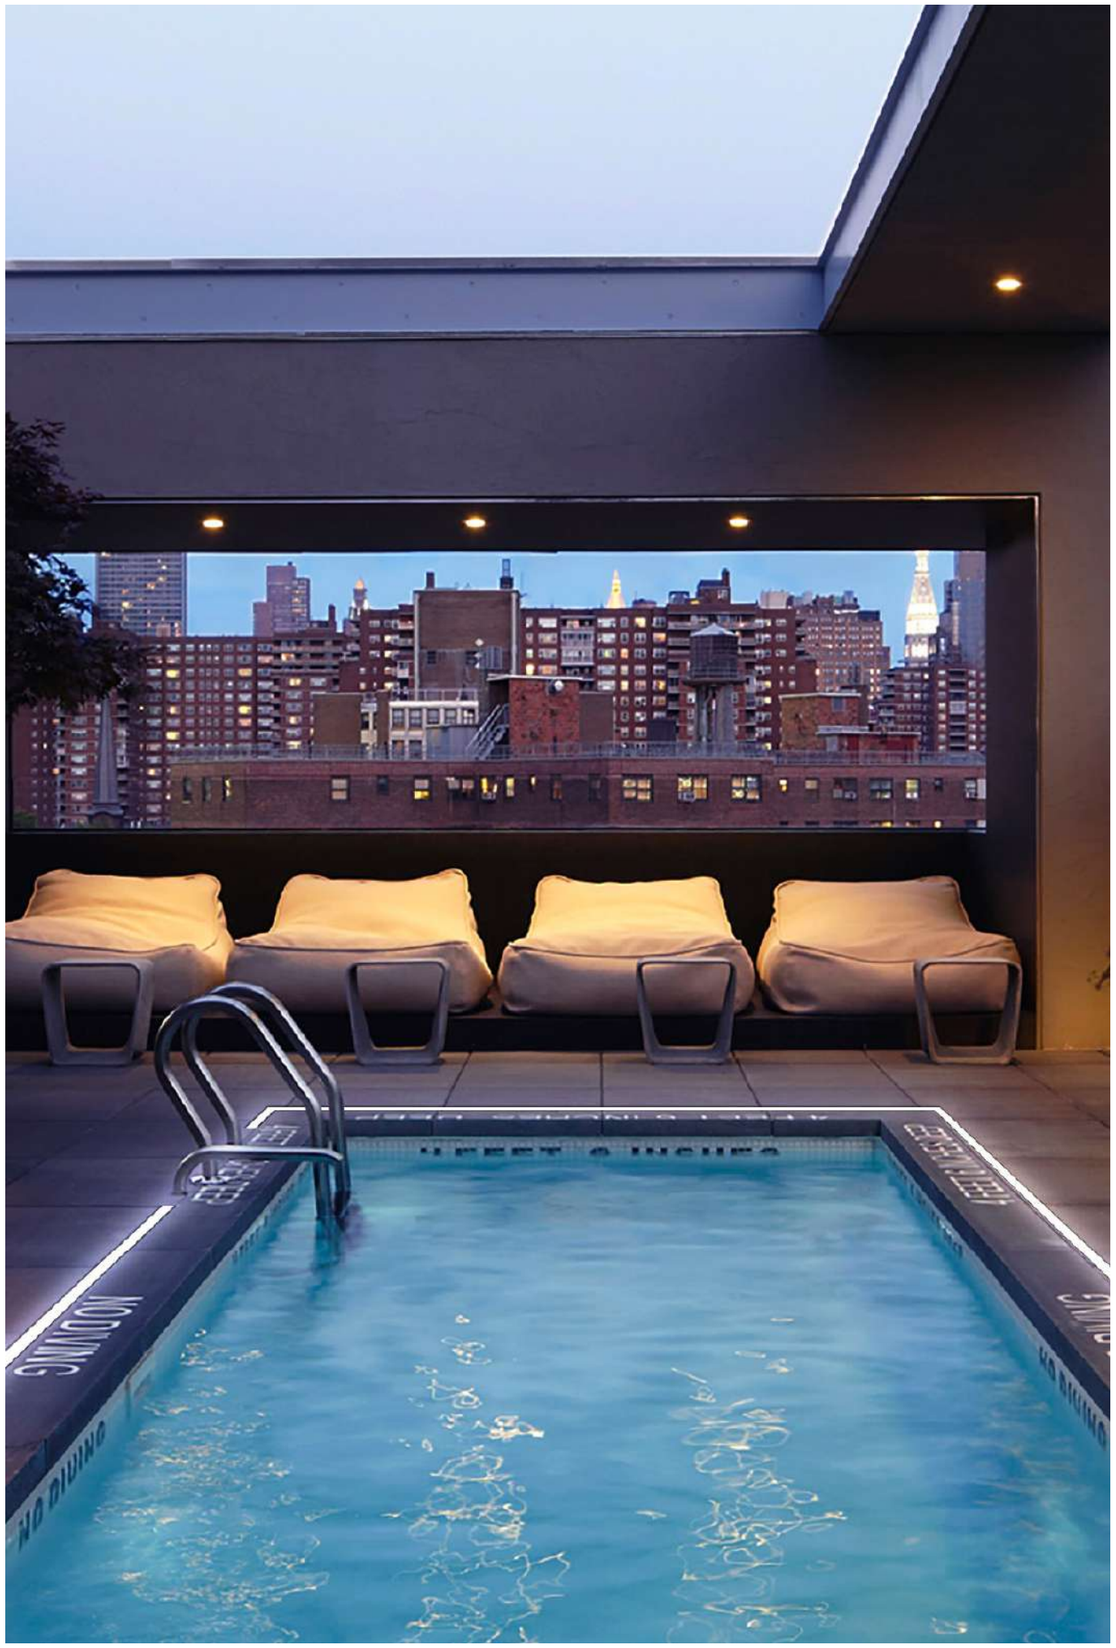

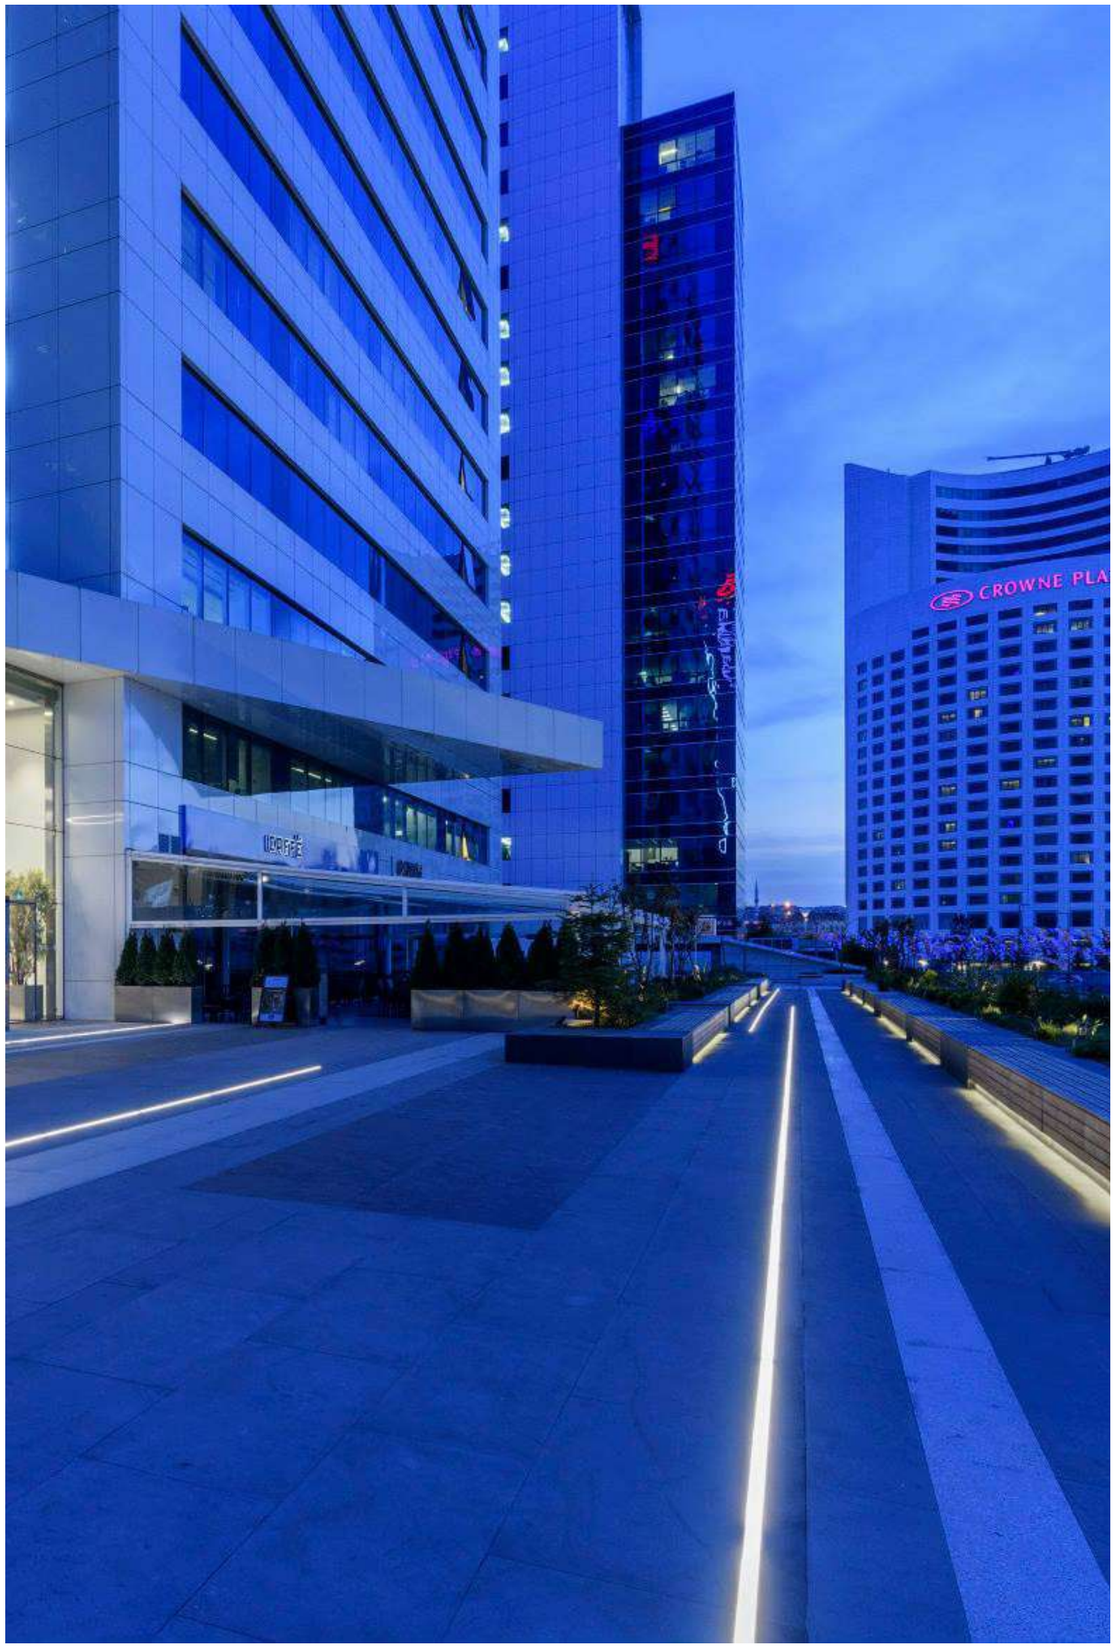
CROWNE PLA

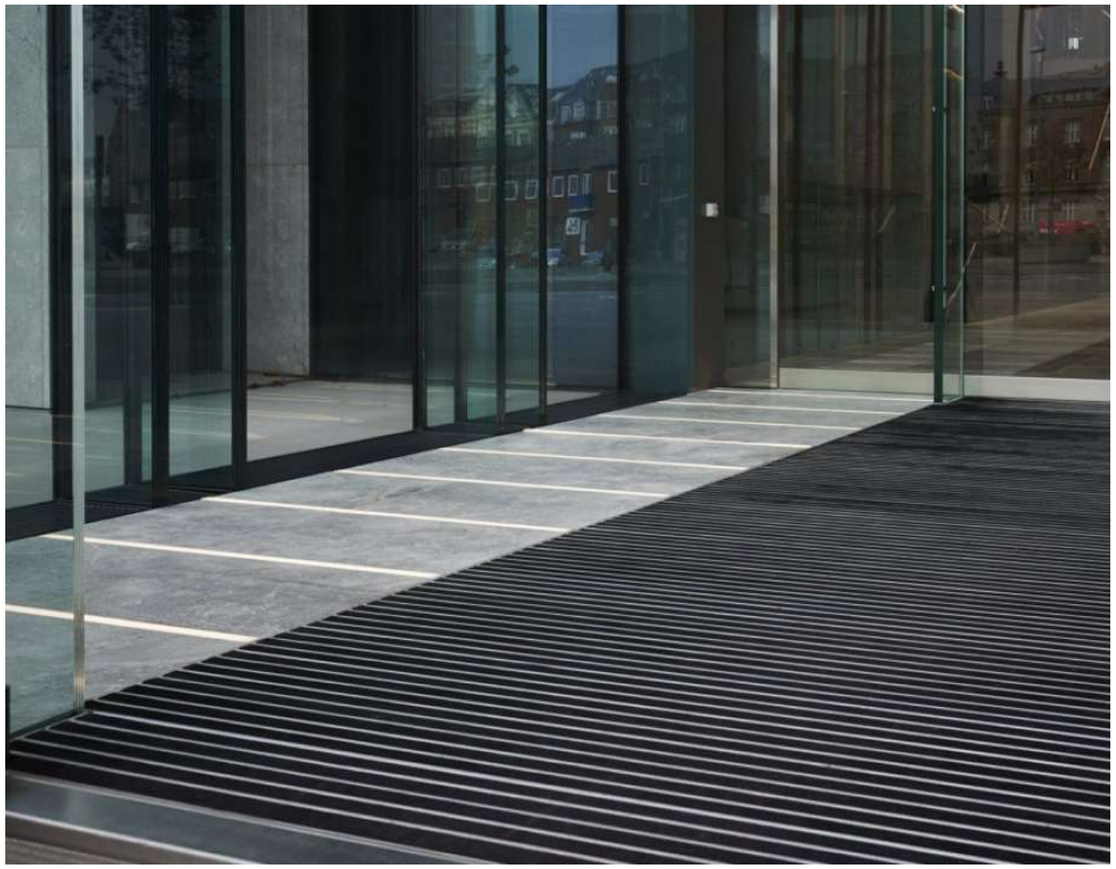

OUTDOOR
VISION
Design U.T. Egoluce

# VISION

Series of adjustable outdoor projectors in anodized aluminium (reinforced anodizing for outdoor) with bracket in stainless steel AISI 316L. Supplied with neoprene cable.
To be installed on tile, pavements, walls, ceiling or temporary positioning on soft ground.

*Serie di proiettori orientabili per esterni in alluminio anodizzato (anodizzazione rinforzata per esterni) con staffa in acciaio inox AISI 316L. Forniti con cavo in neoprene. Da installare su piastrelle, marciapiedi, pareti, soffitto o da posizionare temporaneamente su terreni morbidi.*

*Serie von verstellbaren Außenprojektoren aus eloxiertem Aluminium (verstärkte Eloxierung für den Außenbereich) mit Halterung aus rostfreiem Stahl AISI 316L. Geliefert mit Neoprenkabel. Zur Installation auf Fliesen, Gehwegen, Wänden, Decken oder zur vorübergehenden Aufstellung auf weichem Untergrund.*

# VISION 1




**4529** 0,20 Kg

| | | |
|---|---|---|
| **.34** | Painted Corten | |
| **.39** | Painted Anthracite | |
| **.45** | Anodized Aluminium | |

| | | | | | | |
|---|---|---|---|---|---|---|
| **/W** | 4000K | /11 | /25 | /45 | LED 1,5W 500mA | 180lm |
| **/WW** | 3000K | /11 | /25 | /45 | LED 1,5W 500mA | 162lm |
| **/XW** | 2700K | /11 | /25 | /45 | LED 1,5W 500mA | 153lm |

F III IP66 150 cm CRI >90

## ACCESSORIES

Kit
**0247**

Stake for temporary ground installation

Connector
**0243**

IP Connector

## FINISHES CODES

**.39** Painted Corten

**.39** Painted Anthracite

**.45** Anodized Aluminium

## DRIVERS

**ON/OFF**

| **Cod.** | **0125** 350mA | **0128** 350mA | **0127** 500mA |
|---|---|---|---|
| **4529** | 1-6 | 1-10 | 1-6 |

**DIMMABLE**

| **0141/DIM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM DALI |
|---|---|---|---|
| **4529** 1-11 | 1-11 | 1-21 | 1-21 |

Only serial connection

**IP67 DRIVER**

| **Cod.** | **0031/IP** 350mA | **0143/IP** 500mA |
|---|---|---|
| **4529** | 1-12 | 1-7 |

# VISION 2




**4530** 0,35 Kg

| | | |
|---|---|---|
| **.34** | Painted Corten | |
| **.39** | Painted Anthracite | |
| **.45** | Anodized Aluminium | |

| | | | | | | |
|---|---|---|---|---|---|---|
| **/W** | 4000K | /18 | /40 | /60 | LED 5,9W 350mA | 885lm |
| **/WW** | 3000K | /18 | /40 | /60 | LED 5,9W 350mA | 836lm |
| **/XW** | 2700K | /18 | /40 | /60 | LED 5,9W 350mA | 800lm |

F III IP66 150 cm CRI >90

## ACCESSORIES

Kit
**0247**

Stake for temporary ground installation

Connector
**0243**

IP Connector

## FINISHES CODES

**.39** Painted Corten

**.39** Painted Anthracite

**.45** Anodized Aluminium



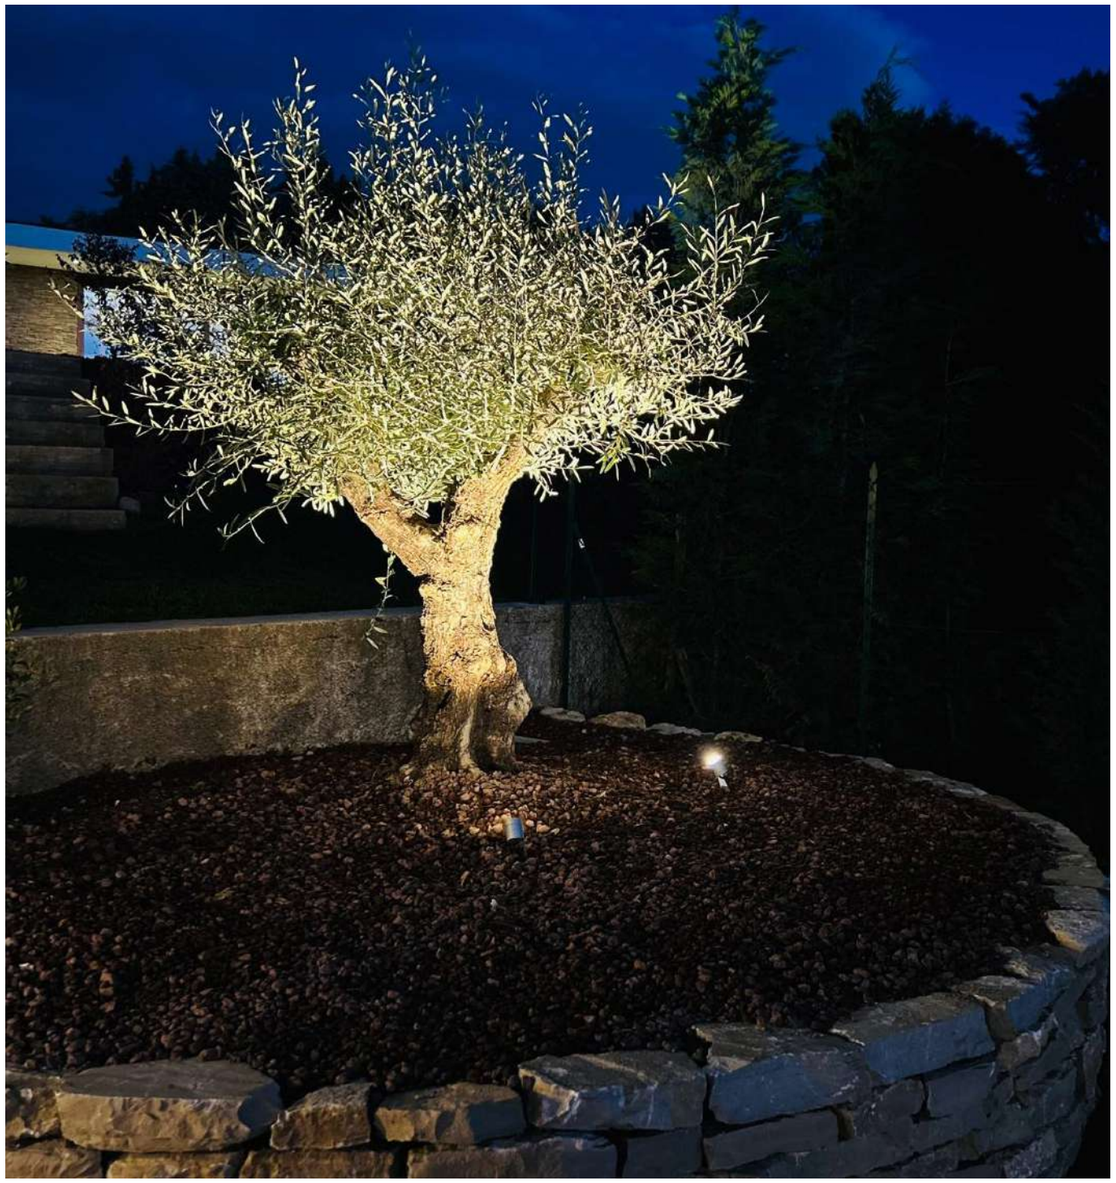

## DRIVERS

**ON/OFF**

| **Cod.** | **0125** 350mA | **0128** 350mA | **0127** 500mA | **0147/COB** 500mA |
|---|---|---|---|---|
| **4530** | 1-2 | 1-3 | 1-2 | 1-2 |

**DIMMABLE**

| | **0141/DIM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM DALI |
|---|---|---|---|---|
| **4530** | 1-3 | 1-3 | 1-7 | 1-7 |

Only serial connection

**IP67 DRIVER**

| **Cod.** | **0031/IP** 350mA | **0143/IP** 500mA |
|---|---|---|
| **4530** | 1-3 | 1-2 |

**LED EMERGENCY UNIT**

| | |
|---|---|
| **0115/EM** INVERTER + BATTERY + LED INDICATOR | |
| **4530** | No |

# VISION 3




**4531** 0,50 Kg

| | | |
|---|---|---|
| **.34** | Painted Corten | |
| **.39** | Painted Anthracite | |
| **.45** | Anodized Aluminium | |

| | | | | | | |
|---|---|---|---|---|---|---|
| **/W** | 4000K | /15 | /28 | /60 | LED 8,7W 500mA | 1223lm |
| **/WW** | 3000K | /15 | /28 | /60 | LED 8,7W 500mA | 1156lm |
| **/XW** | 2700K | /15 | /28 | /60 | LED 8,7W 500mA | 1106lm |

F III IP66 150 cm CRI >90

## ACCESSORIES

Kit
**0247**

Stake for temporary ground installation

Connector
**0243**

IP Connector

## FINISHES CODES

**.39** Painted Corten

**.39** Painted Anthracite

**.45** Anodized Aluminium

## DRIVERS

**ON/OFF**

| **Cod.** | **0147/COB** 500mA |
|---|---|
| **4531** | 1-2 |

**DIMMABLE**

| **0141/DIM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM - DALI |
|---|---|---|---|
| **4531** 1-2 | 1-2 | 1-3 | 1-3 |

Only serial connection

**IP67 DRIVER**

| **Cod.** | **0143/IP** 500mA |
|---|---|
| **4531** | 1 |

**LED EMERGENCY UNIT**

**0115/EM** INVERTER + BATTERY + LED INDICATOR

| | |
|---|---|
| **4531** | 1 |

**OUT**DOOR

# SPILLO

Design Officinadiarchitettura&design

# SPILLO

IP67 floor lamp providing diffused light with an AISI 316L steel structure and a transparent coextruded UV-resistant methacrylate diffuser.

Light is emitted 360° along the entire length of the diffuser.

Accessories for the installation of SPILLO such as the box plate with steel screws, the IP connector for cables with a diameter of less than 7.0 mm, the stakes for temporary ground installation and the base cover must be ordered separately.

*Lampada da terra IP67 a luce diffusa con struttura in acciaio AISI 316L e diffusore in metacrilato trasparente coestruso resistente ai raggi UV.*

*La luce viene emessa a 360° su tutta la lunghezza del diffusore.*

*Gli accessori per l'installazione di SPILLO, come la piastra di contenimento con viti in acciaio, il connettore IP per cavi di diametro inferiore a 7,0 mm, i picchetti per l'installazione temporanea a terra e il coperchio della base, devono essere ordinati separatamente.*

*Stehleuchte IP67 für diffuses Licht mit einer Struktur aus Stahl AISI 316L und einem transparenten, koextrudierten Diffusor aus UV-beständigem Methacrylat.*

*Der Lichtaustritt erfolgt um 360° über die gesamte Länge des Schirms.*

*Das Zubehör für die Installation von SPILLO, wie z.B. die Kastenplatte mit Stahlschrauben, der IP-Anschluss für Kabel mit einem Durchmesser von weniger als 7,0 mm, die Pflöcke für die vorübergehende Bodeninstallation und die Sockelabdeckung, muss separat bestellt werden.*

# SPILLO



**3542** 0,60Kg

| | | |
|---|---|---|
| **.33** | Matt Steel INOX AISI 316L | |
| **.34** | Painted corten finishing | |

| | | | |
|---|---|---|---|
| **/W** | 4000K | LED 24V 6W | 650lm |
| **/WW** | 3000K | LED 24V 6W | 576lm |
| **/XW** | 2700K | LED 24V 3W | 520lm |

F III IP67 60 cm CRI >90



**3543** 0,90 Kg

| | | |
|---|---|---|
| **.33** | Matt Steel INOX AISI 316L | |
| **.34** | Painted corten finishing | |

| | | | |
|---|---|---|---|
| **/W** | 4000K | LED 24V 6W | 650lm |
| **/WW** | 3000K | LED 24V 6W | 576lm |
| **/XW** | 2700K | LED 24V 3W | 520lm |

F III IP67 30 cm CRI >90

## FINISHES CODES

**.33**
Stainless Steel
316L

**.34**
Painted Corten
Finishing

# SPILLO

## ACCESSORIES

Kit
**0246/R**

Draining formork with plate

Box
**0243**

IP Connector on cable

Box
**0245**

Stakes for temporary installation on field

Box
**0252/S.33**

Basecover

## DRIVERS

**ON/OFF**

| Cod. | 0155 | 0156 | 0157 | 0160 |
|---|---|---|---|---|
| | 24V-13W | 24V-25W | 24V-75W | 24V-60W |

**IP67 DRIVER**

| Cod. | 0033/IP | 0034/IP |
|---|---|---|
| | 24V 14,4W | 24V 70W |

**IN**DOOR / **OUT**DOOR

# RACCORDI DI LUCE JOY

Design officinadiarchitettura&design

# RACCORDI DI LUCE - JOY

Collection of IP65 direct light system, wall, ceiling, and floor lamps, for both outdoor and indoor use, with structure in 304 stainless steel and aluminum with reinforced anodizing for outdoor use or, in the satin steel finish, in AISI 316L stainless steel.

The system is a new and different way of interpreting light: starting from a single power supply point, the modularity of the various elements allows for the creation of multiple configurations bringing the light wherever it is needed.

*Collezione di lampade a luce diretta IP65, a parete, a soffitto e a terra, per esterni e interni, con struttura in acciaio inox 304 e alluminio con anodizzazione rinforzata per esterni o, nella finitura acciaio satinato, in acciaio inox AISI 316L.*

*Il sistema è un modo nuovo e diverso di interpretare la luce: partendo da un unico punto di alimentazione, la modularità dei vari elementi permette di creare molteplici configurazioni portando la luce ovunque sia necessaria.*

*Kollektion von IP65-Direktbeleuchtungssystemen, Wand-, Decken- und Stehlampen, sowohl für den Außen- als auch für den Innenbereich, mit Strukturen aus Edelstahl 304 und Aluminium mit verstärkter Eloxierung für den Außenbereich oder, in der Ausführung aus satiniertem Stahl, aus Edelstahl AISI 316L.*

*Das System ist eine neue und andere Art, Licht zu interpretieren: Ausgehend von einem einzigen Stromanschluss, ermöglicht die Modularität der verschiedenen Elemente die Schaffung von mehreren Konfigurationen, die das Licht dorthin bringen, wo es benötigt wird.*

# RACCORDI DI LUCE - JOY










**4672** 0,31 Kg

| | | |
|---|---|---|
| **.01** | White | |
| **.02** | Black | |
| **.33** | Stainless Steel AISI 316L | |
| **.34** | Painted Corten | |

| | | | | |
|---|---|---|---|---|
| **/W** | 4000K | LED 3W | 500mA | 360lm |
| **/WW** | 3000K | LED 3W | 500mA | 324lm |
| **/XW** | 2700K | LED 3W | 500mA | 306lm |

F III IP65 CRI >90

**4673** 0,25 Kg

| | | |
|---|---|---|
| **.01** | White | |
| **.02** | Black | |
| **.33** | Stainless Steel AISI 316L | |
| **.34** | Painted Corten | |

| | | | | |
|---|---|---|---|---|
| **/W** | 4000K | LED 1,5W | 500mA | 180lm |
| **/WW** | 3000K | LED 1,5W | 500mA | 162lm |
| **/XW** | 2700K | LED 1,5W | 500mA | 153lm |

F III IP65 CRI >90

**5690** 0,20 Kg

| | | |
|---|---|---|
| **.01** | White | |
| **.02** | Black | |
| **.33** | Stainless Steel AISI 316L | |
| **.34** | Painted Corten | |

| | | | | |
|---|---|---|---|---|
| **/W** | 4000K | LED 1,5W | 500mA | 180lm |
| **/WW** | 3000K | LED 1,5W | 500mA | 162lm |
| **/XW** | 2700K | LED 1,5W | 500mA | 153lm |

F III IP65 CRI >90

**DRIVERS ON/OFF**

| Cod. LED | **0143/IP** 500mA | **0127** 500mA |
|---|---|---|
| **4672** | 1-3 | 1-3 |
| **4673** | 1-7 | 1-6 |
| **5690** | 1-7 | 1-6 |

Only serial connection

## FINISHES CODES



**.01** White

**.02** Black

**.33** Stainless Steel AISI316L

**.34** Painted Corten



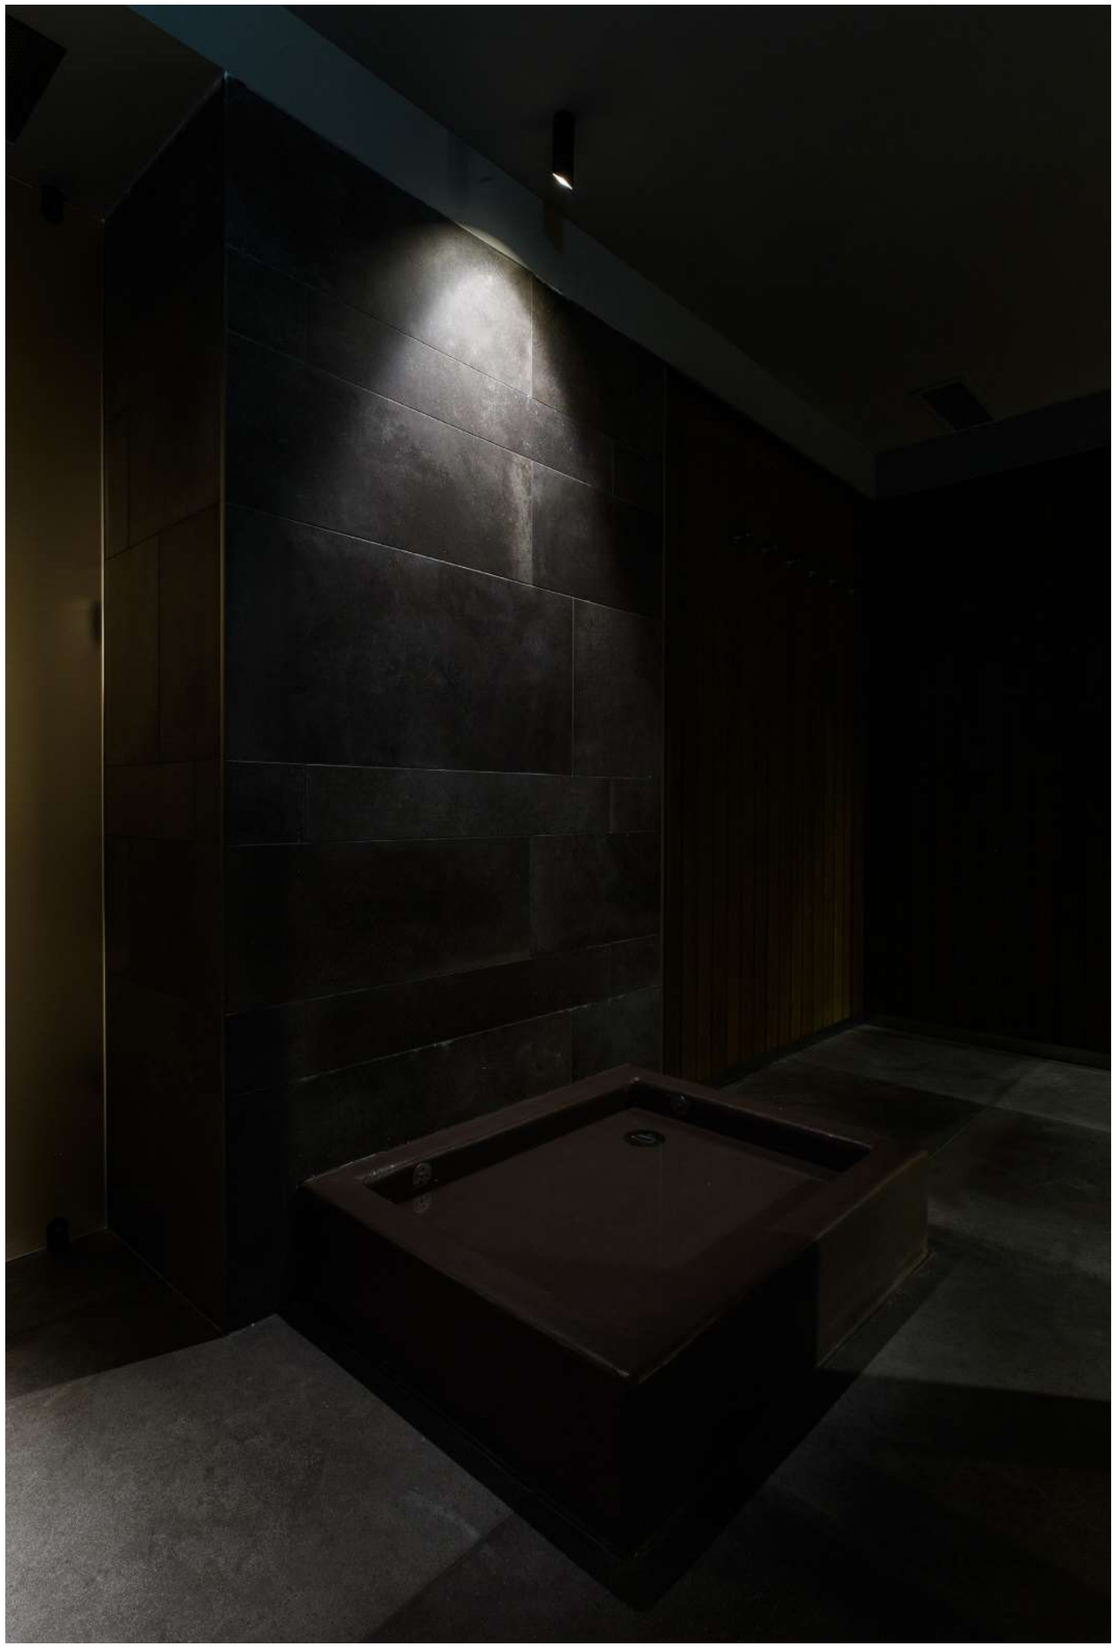

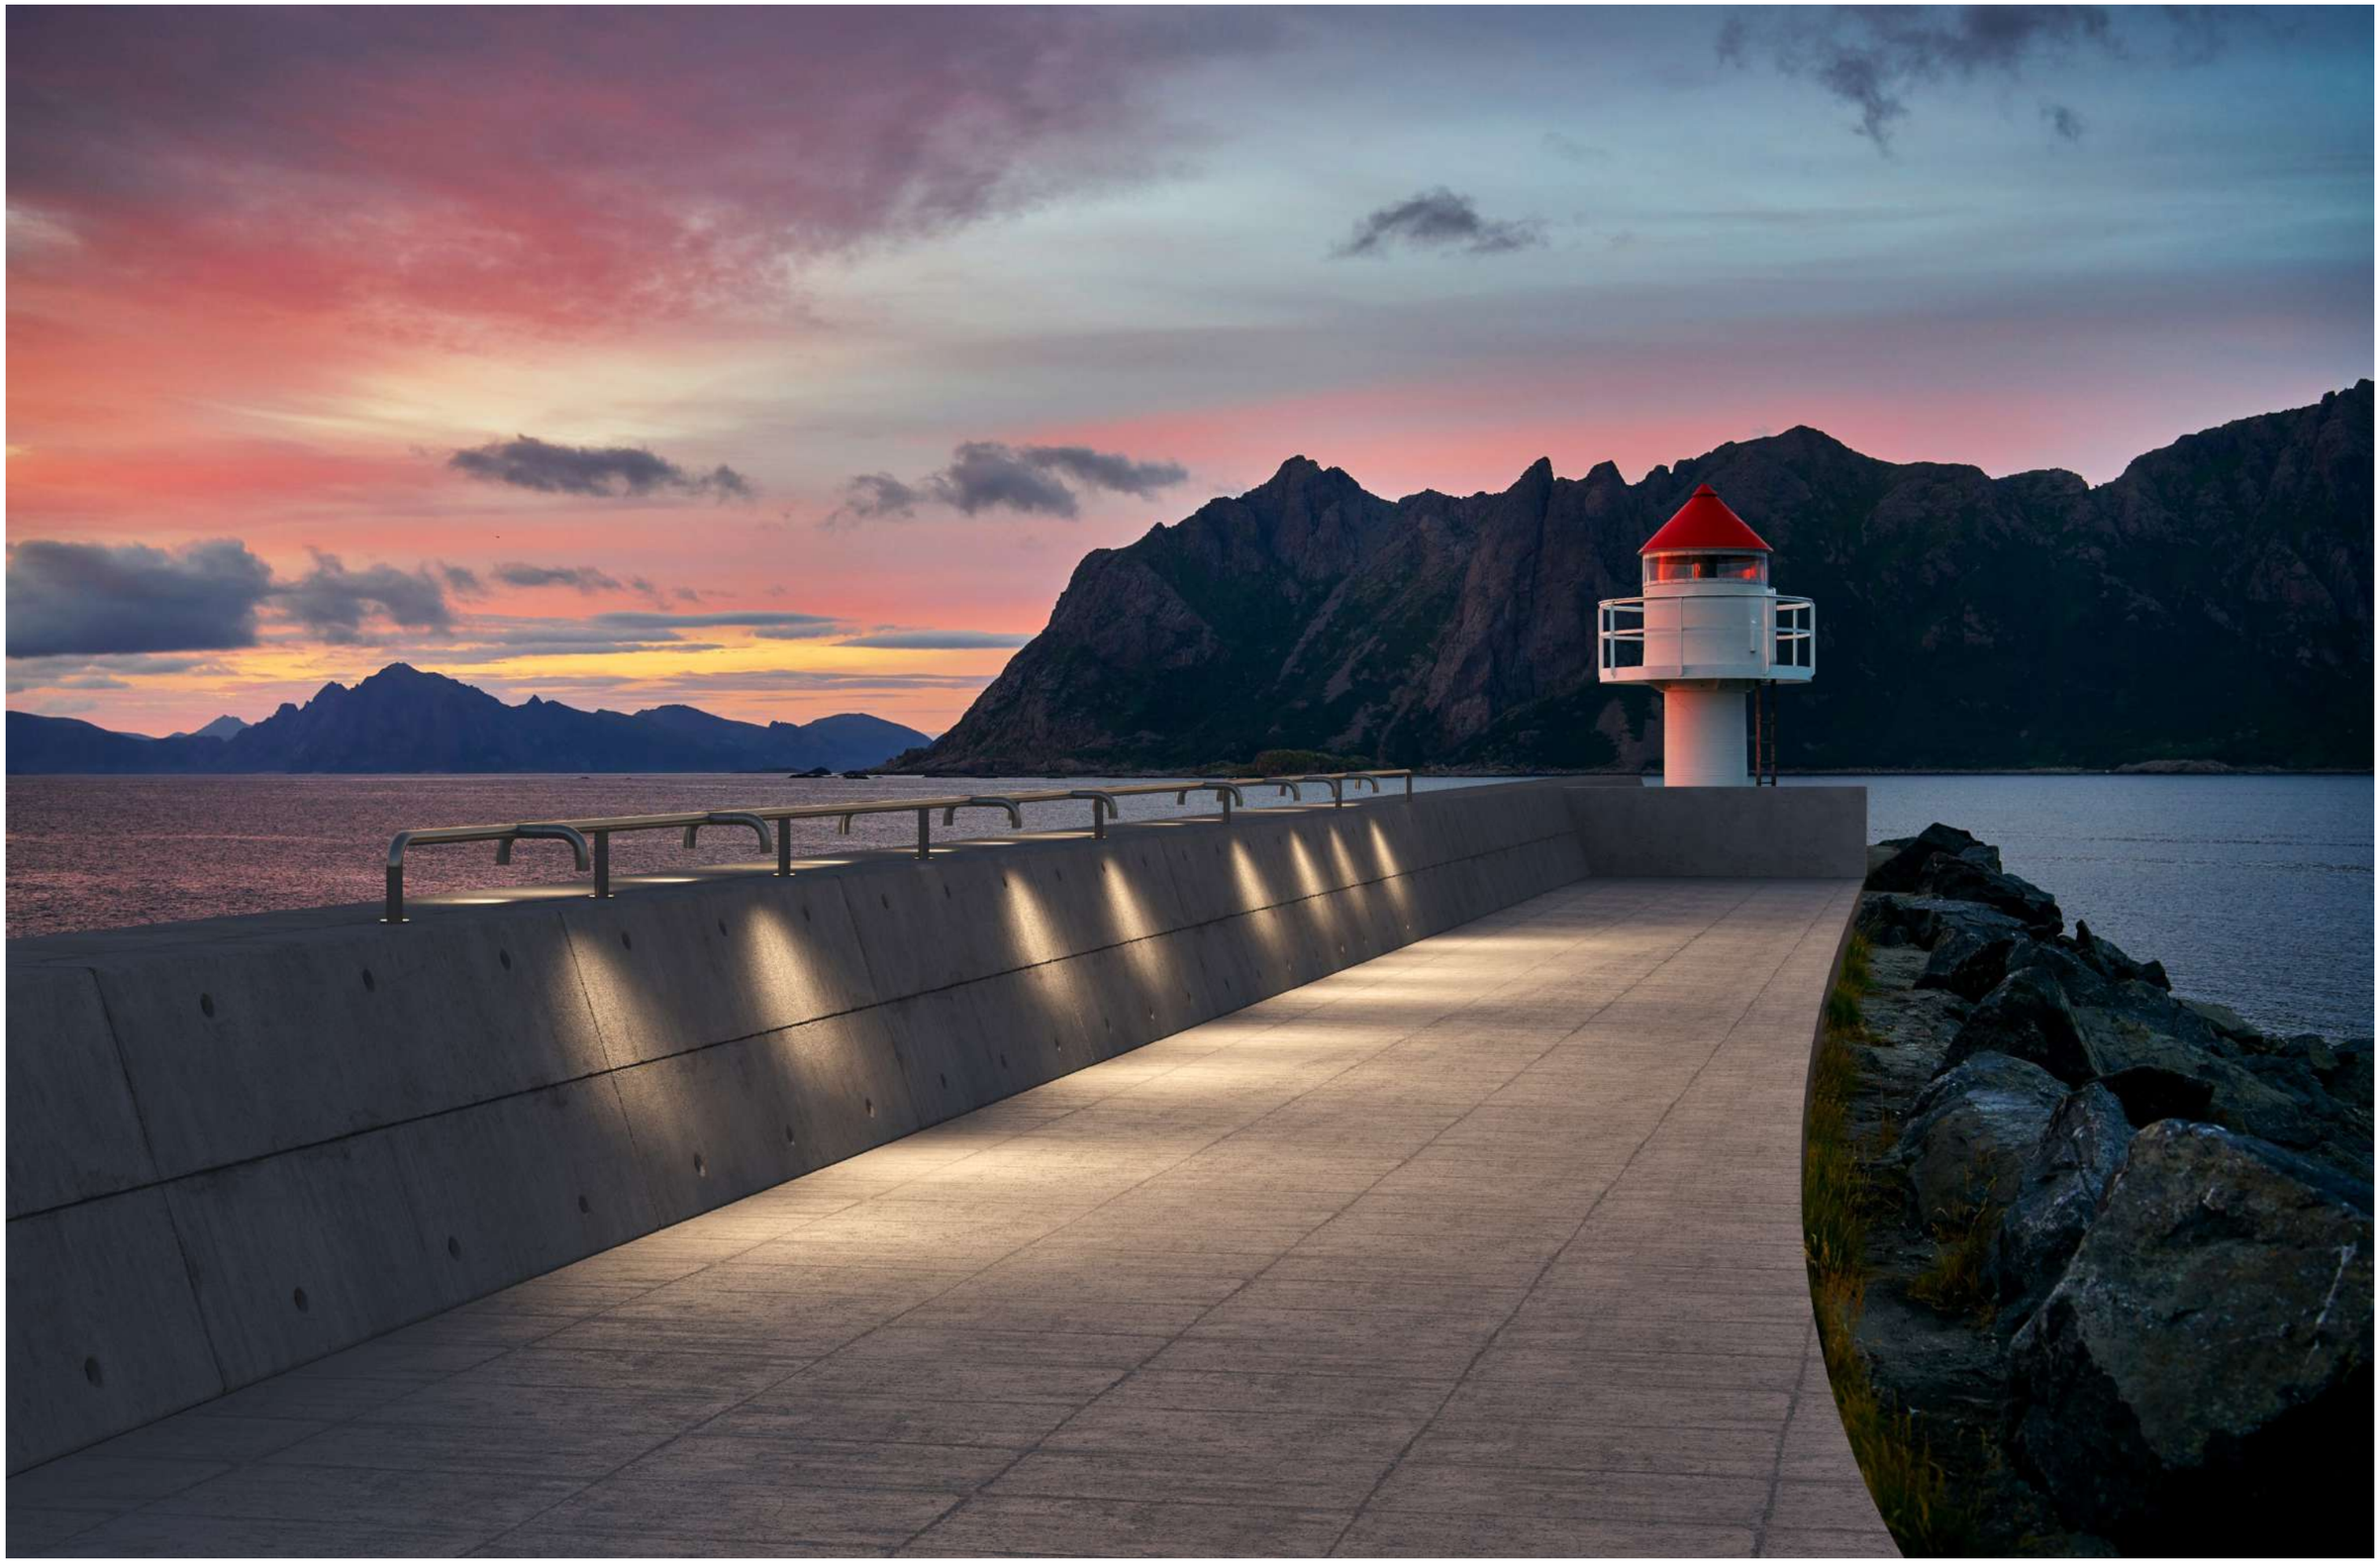

# RACCORDI DI LUCE SYSTEM - JOY SYSTEM

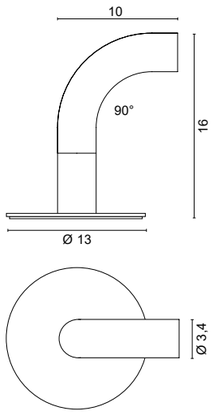

The lamps are supplied without drivers
These are to be ordered separately and placed remotely

**3555** 0,60 Kg

| | | |
|---|---|---|
| **.33** | Stainless Steel AISI 316L | |
| **.34** | Painted Corten | |

| | | | | |
|---|---|---|---|---|
| **/W** | 4000K | LED 1,5W | 500mA | 180lm |
| **/WW** | 3000K | LED 1,5W | 500mA | 162lm |
| **/XW** | 2700K | LED 1,5W | 500mA | 153lm |

F III IP65 50 cm CRI >90

Only Serial Connection

## ACCESSORIES

Box
**0246/R**

Draining formwork with plate

Connector
**0276**

IP67 connector with gel

## FINISHES CODES

**.33** Stainless Steel AISI316L

**.34** Painted Corten

**DRIVERS**

**ON/OFF**

| **Cod.** | **0143/IP** 500mA | **0127** 500mA |
|---|---|---|
| **3547** | 1-7 | 1-6 |

Only serial connection

# RACCORDI DI LUCE SYSTEM - JOY SYSTEM

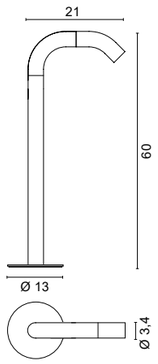


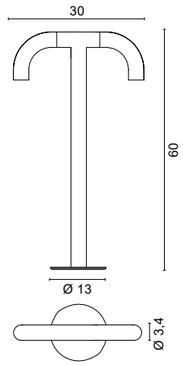


**3556** 1,50 Kg

| | | |
|---|---|---|
| **.33** | Stainless Steel AISI 316L | |
| **.34** | Painted Corten | |

| | | | | | |
|---|---|---|---|---|---|
| **/W** | 4000K | LED | 1,5W | 500mA | 180lm |
| **/WW** | 3000K | LED | 1,5W | 500mA | 162lm |
| **/XW** | 2700K | LED | 1,5W | 500mA | 153lm |

F III IP65 50 cm CRI >90

Only Serial Connection

**3557** 2,00 Kg

| | | |
|---|---|---|
| **.33** | Stainless Steel AISI 316L | |
| **.34** | Painted Corten | |

| | | | | | |
|---|---|---|---|---|---|
| **/W** | 4000K | LED | 3W | 500mA | 360lm |
| **/WW** | 3000K | LED | 3W | 500mA | 324lm |
| **/XW** | 2700K | LED | 3W | 500mA | 306lm |

F III IP65 50 cm CRI >90

Only Serial Connection

## FINISHES CODES

**.33** Stainless Steel AISI316L

**.34** Painted Corten

## ACCESSORIES

Box
**0246/R**

Draining formwork with plate

Connector
**0276**

IP67 Connector

**DRIVERS**

**ON/OFF**

| **Cod.** | **0143/IP** 500mA | **0127** 500mA |
|---|---|---|
| **3548** | 1-3 | 1-3 |
| **3549** | 1-3 | 1-3 |

# RACCORDI DI LUCE SYSTEM - JOY SYSTEM

## ILLUMINATOR




**7516** Illuminatori 0,08 Kg

| | | |
|---|---|---|
| **.45** | Anodized aluminium | |

| | | | | |
|---|---|---|---|---|
| **/W** | 4000K | LED 1,5W | 500mA | 180lm |
| **/WW** | 3000K | LED 1,5W | 500mA | 162lm |
| **/XW** | 2700K | LED 1,5W | 500mA | 153lm |

F III IP65 50 cm 73° 3 cm

## ELEMENTS




**7500** 90° expanding bend

| | | |
|---|---|---|
| **.01** | White | |
| **.02** | Black | |
| **.06** | Green | |
| **.33** | Stainless Steel AISI 316L | |
| **.34** | Painted Corten | |




**7501** T Joint expanding bend

| | | |
|---|---|---|
| **.01** | White | |
| **.02** | Black | |
| **.06** | Green | |
| **.33** | Stainless Steel AISI 316L | |
| **.34** | Painted Corten | |




**7504** 45° expanding bend

| | | |
|---|---|---|
| **.01** | White | |
| **.02** | Black | |
| **.06** | Green | |
| **.33** | Stainless Steel AISI 316L | |
| **.34** | Painted Corten | |




**7505** Joint with 45° cut

| | | |
|---|---|---|
| **.01** | White | |
| **.02** | Black | |
| **.06** | Green | |
| **.33** | Stainless Steel AISI 316L | |
| **.34** | Painted Corten | |




**7508** Linear tube

| | | |
|---|---|---|
| **.01** | White | |
| **.02** | Black | |
| **.06** | Green | |
| **.33** | Stainless Steel AISI 316L | |
| **.34** | Painted Corten | |

| | |
|---|---|
| **/20** | 20cm |
| **/50** | 50cm |
| **/100** | 100cm |
| **/150** | 150cm |

**DRIVERS**

**ON/OFF**

| **Cod.** | **0143/IP** 500mA | **0127** 500mA |
|---|---|---|
| **7516** | 1-7 | 1-6 |

Only serial connection

## FINISHES CODES

**.01** White

**.02** Black

**.06** Green

**.33** Stainless Steel AISI316L

**.34** Painted Corten

# RACCORDI DI LUCE SYSTEM - JOY SYSTEM

## ACCESSORIES




**7510** Junction element

| | | |
|---|---|---|
| **.02** | Black | ■ |




**7521** Aluminium wall base with cover disk

| | | |
|---|---|---|
| **.01** | White | |
| **.02** | Black | ■ |
| **.06** | Green | ■ |
| **.33** | Stainless Steel AISI 316L | ■ |
| **.34** | Painted Corten | ■ |




**7522** Base with cover disk

| | | |
|---|---|---|
| **.01** | White | |
| **.02** | Black | ■ |
| **.06** | Green | ■ |
| **.33** | Stainless Steel AISI 316L | ■ |
| **.34** | Painted Corten | ■ |

## BOX & CONNECTORS




**0213** Box + Perforated plaster




**0216** Plastic box




**0228/R** Draining junction box




**0246/R** Draining formwork with plate




**0276** IP67 Connector



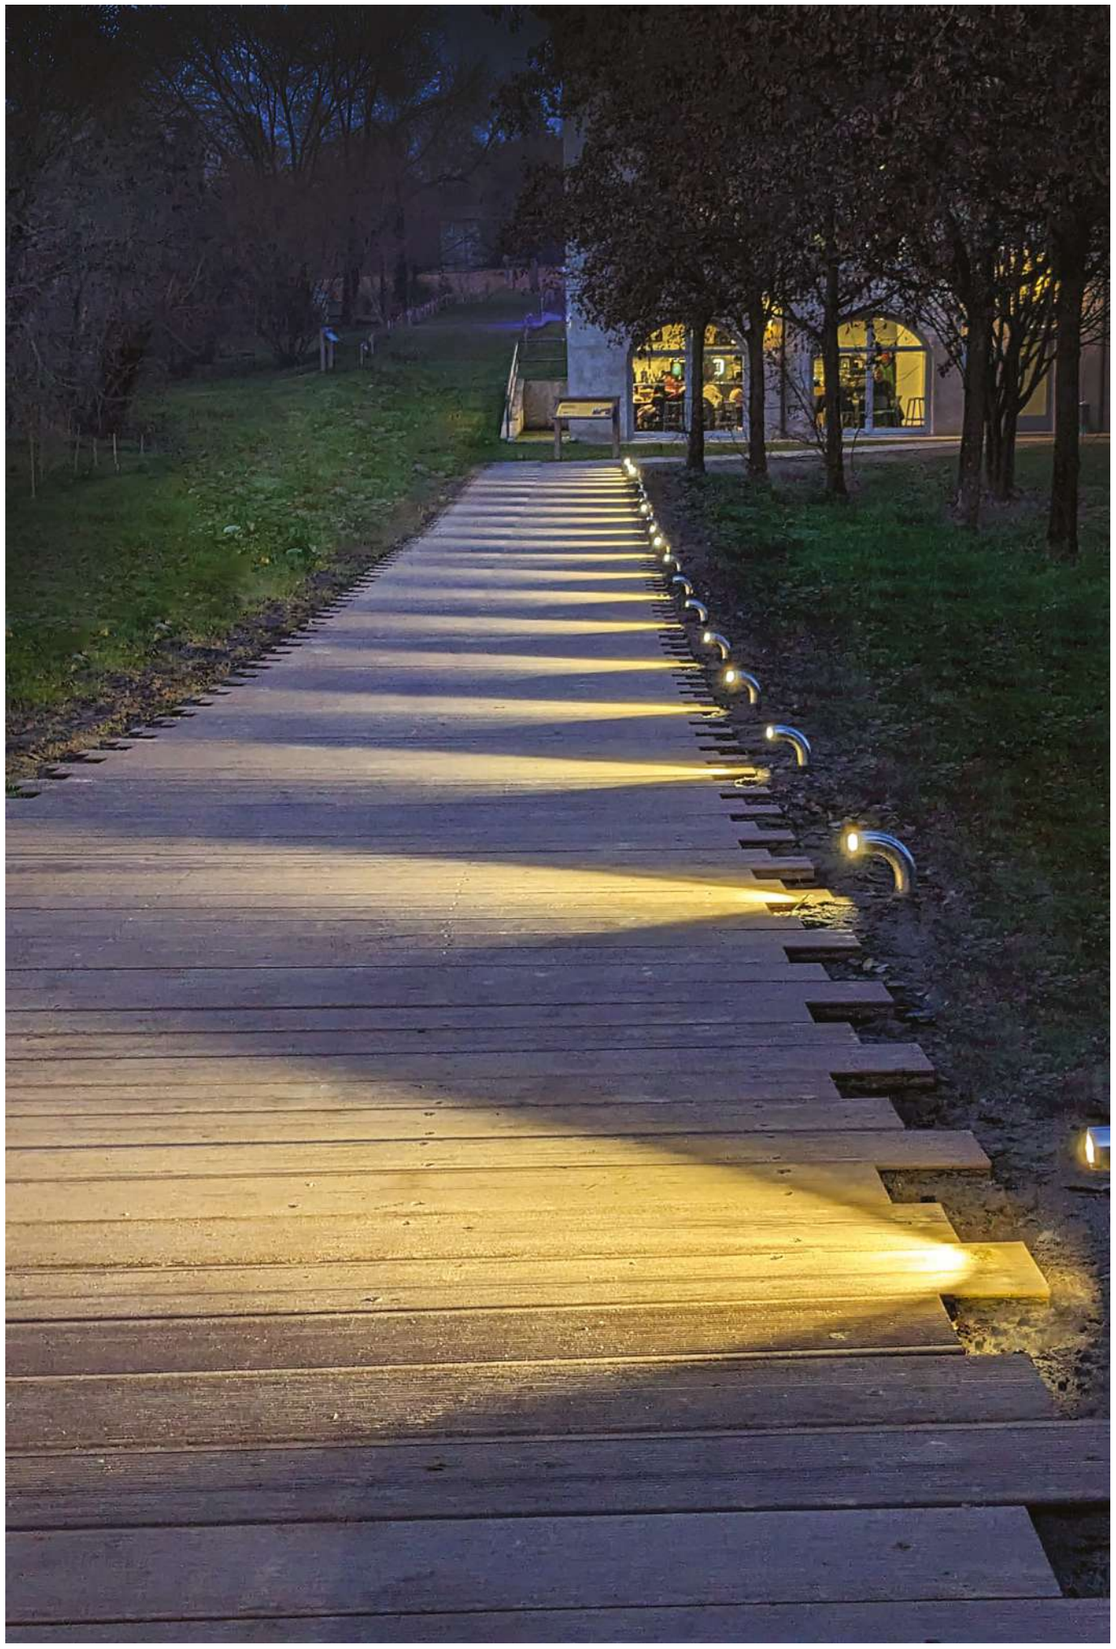

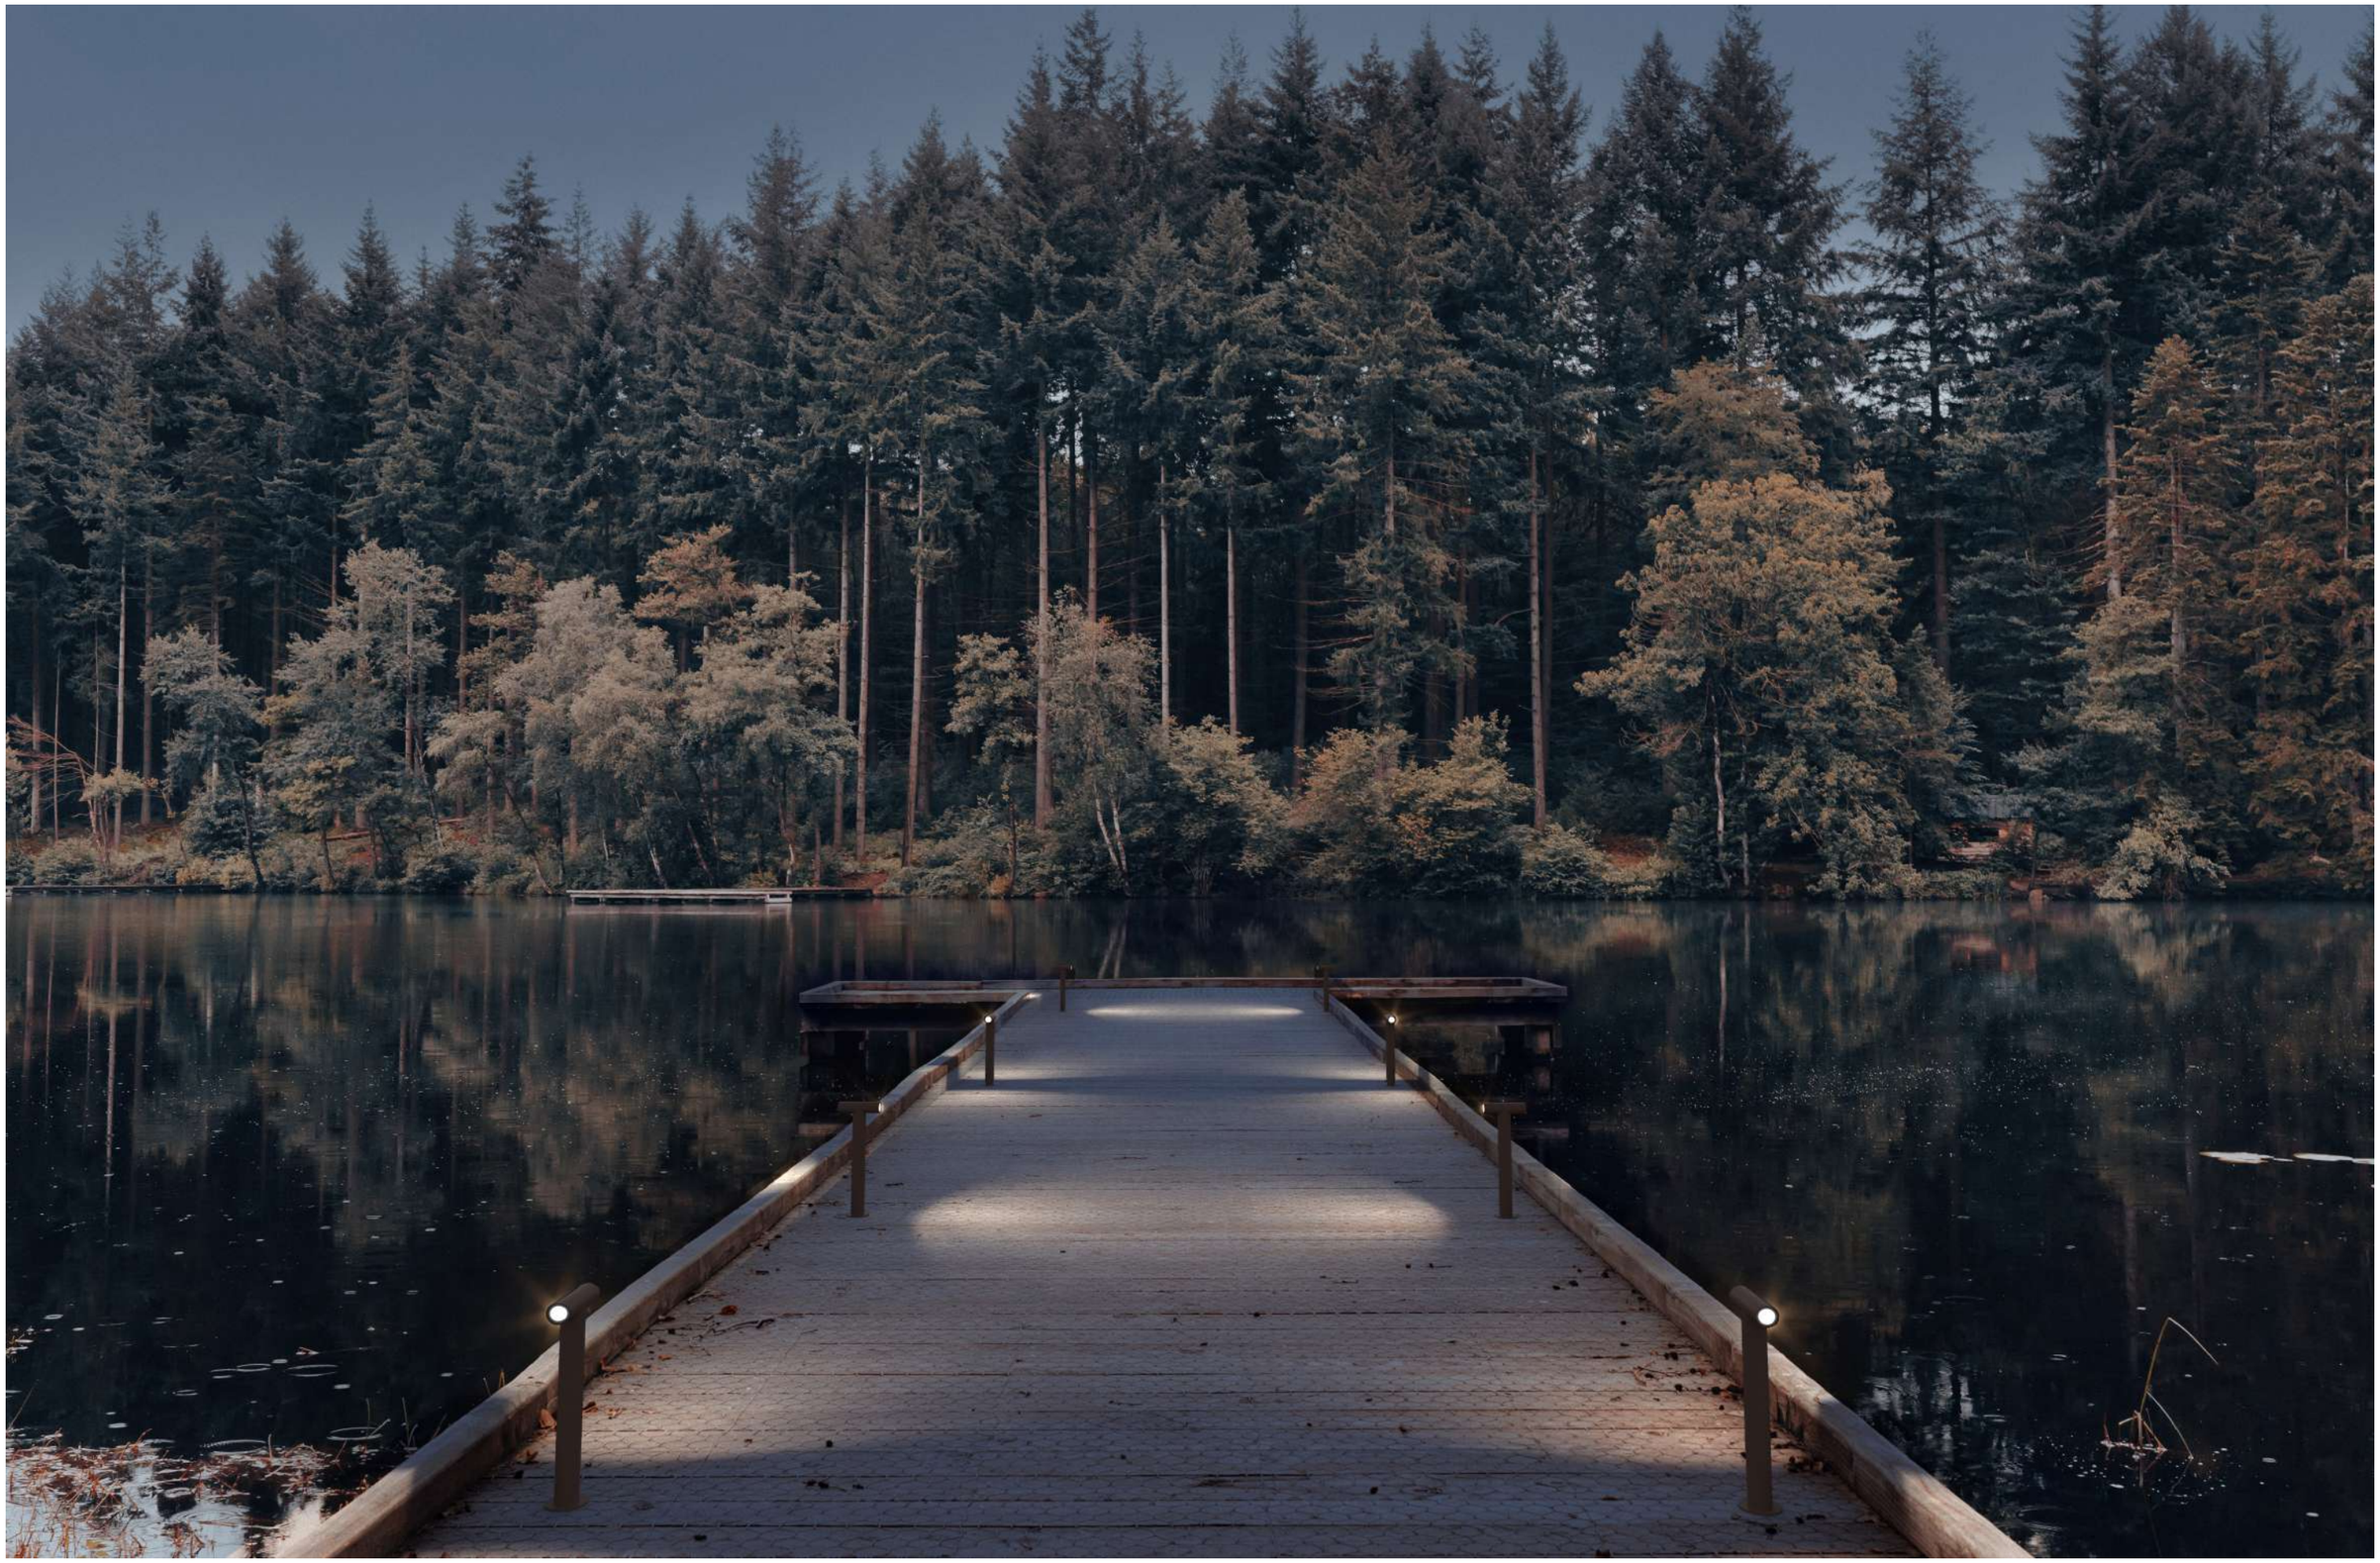

# RACCORDI DI LUCE SYSTEM - JOY SYSTEM

EXAMPLES OF MULTIPLE CONFIGURATION

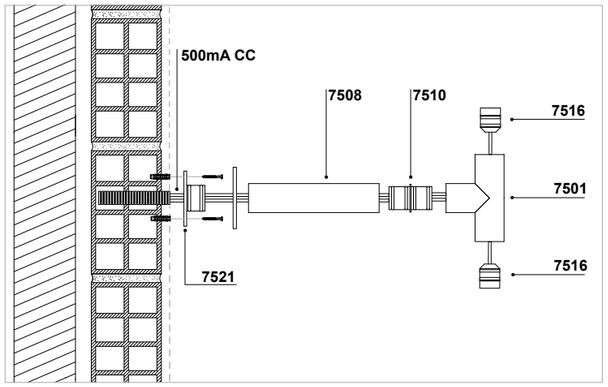

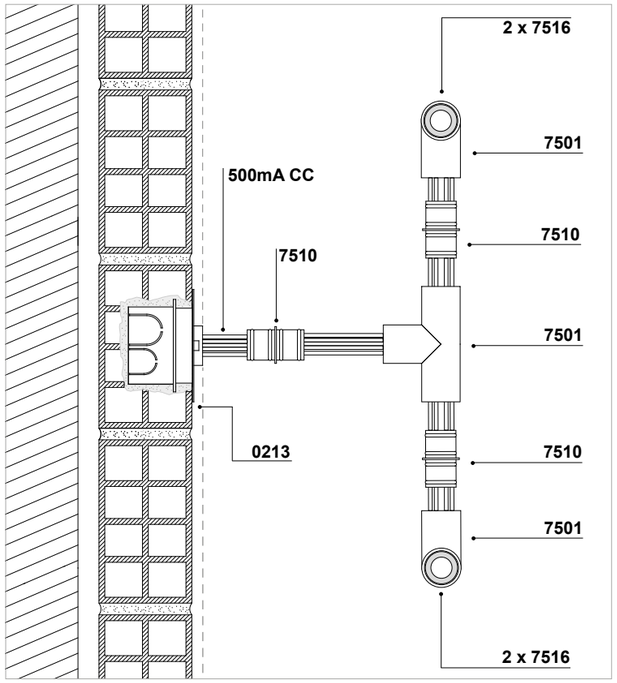

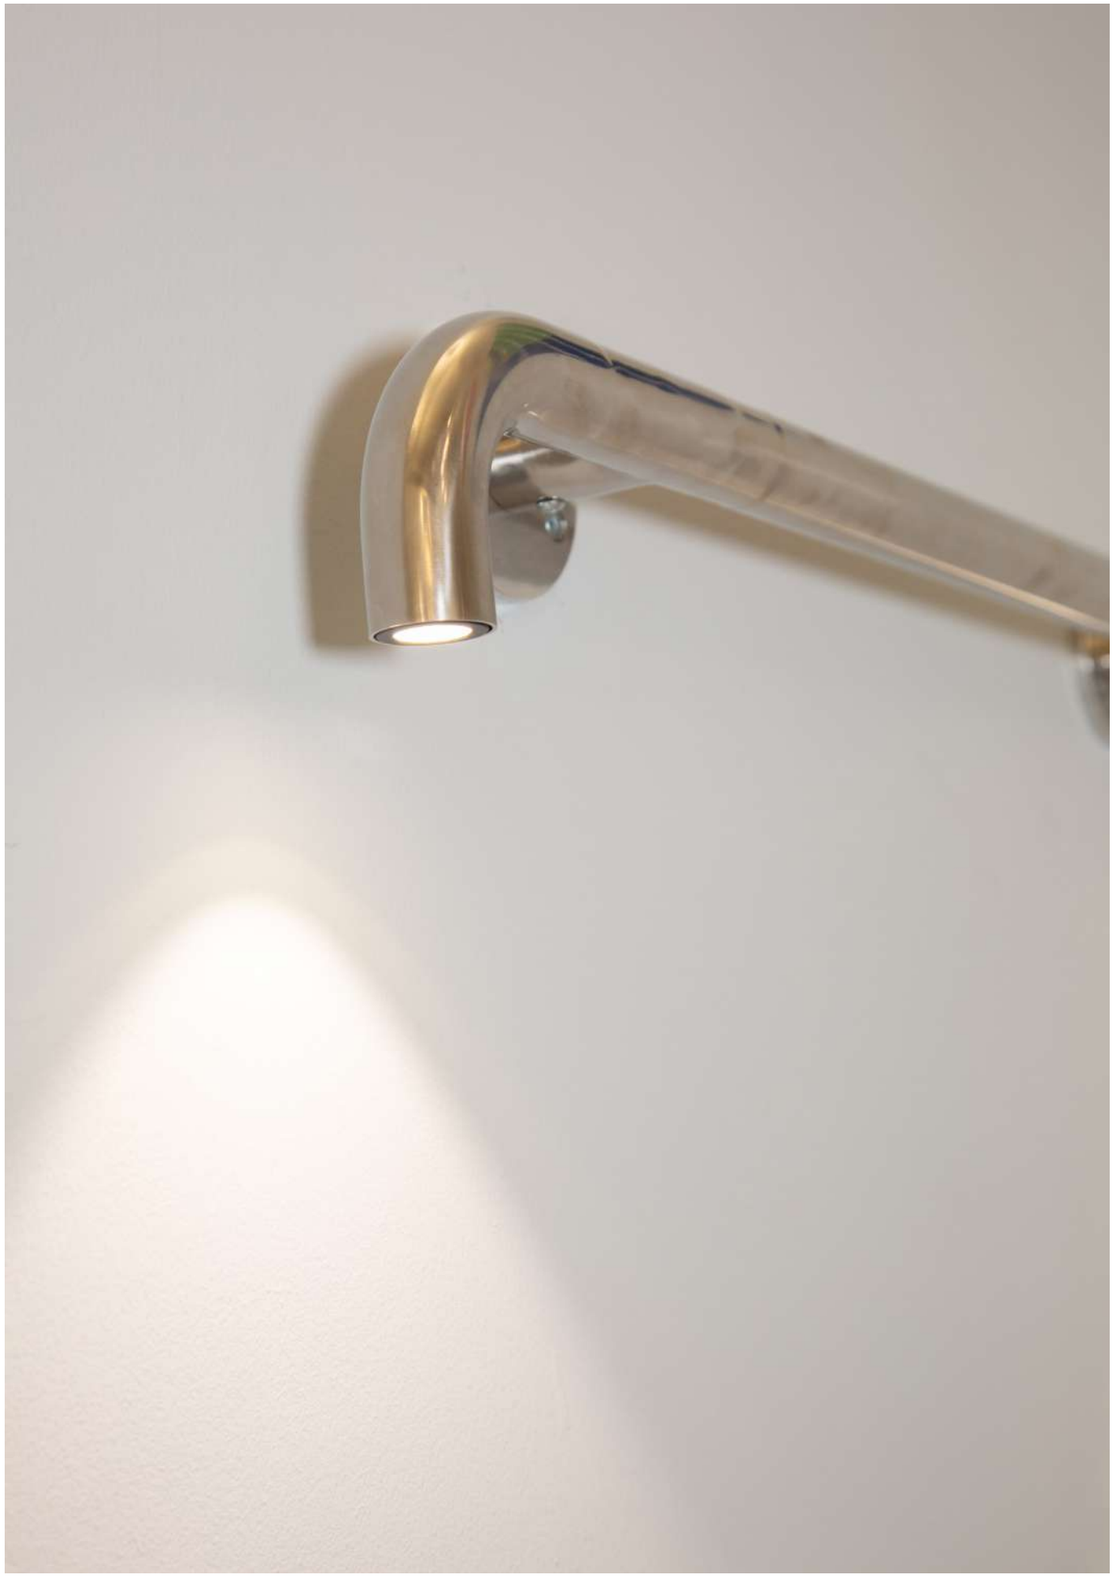

**OUT**DOOR

# TRILLI

Design Matì

# TRILLI

IP67 floor lamp providing diffused light with natural copper stem and crystal diffuser. It can be installed with a single or multiple lamp base or with a spike.
Accessories, and the driver to be remotely positioned, are to be ordered separately.

*Lampada da terra IP67 a luce diffusa con stelo in rame naturale e diffusore in cristallo. Può essere installata con una base a lampada singola o multipla o con un picchetto. Gli accessori e il driver da posizionare a distanza sono da ordinare separatamente.*

*Stehleuchte IP67 mit diffusem Licht, Stiel aus natürlichem Kupfer und Kristalldiffusor. Sie kann mit einem einzelnen oder mehreren Lampensockeln oder mit einem Erdspieß installiert werden. Das Zubehör und das Driver für die entfernte Positionierung sind separat zu bestellen.*

# TRILLI




**3547** 0,15 Kg

| | | | |
|---|---|---|---|
| **.38** | Shiny Copper | | |
| **/W** | 4000K | LED 1W 350mA | 129lm |
| **/WW** | 3000K | LED 1W 350mA | 117lm |
| **/XW** | 2700K | LED 1W 350mA | 110lm |

F III IP67 450 cm CRI >90

Moldable and adjustable




**3548** 0,25 Kg

| | | | |
|---|---|---|---|
| **.38** | Shiny Copper | | |
| **/W** | 4000K | LED 1W 350mA | 129lm |
| **/WW** | 3000K | LED 1W 350mA | 117lm |
| **/XW** | 2700K | LED 1W 350mA | 110lm |

F III IP67 450 cm CRI >90

Moldable and adjustable




**3549** 0,40 Kg

| | | | |
|---|---|---|---|
| **.38** | Shiny Copper | | |
| **/W** | 4000K | LED 1W 350mA | 129lm |
| **/WW** | 3000K | LED 1W 350mA | 117lm |
| **/XW** | 2700K | LED 1W 350mA | 110lm |

F III IP67 400 cm CRI >90

Moldable and adjustable

## FINISHES CODES

**.38** Shiny Copper

# TRILLI

## ACCESSORIES




**0259/1** Stake for temporary installation on field




**0243** IP connector on cable




**0246/R** Draining formwork with plate




**0252/1** Installation base for 1 art. Trilli




**0252/2** Installation base for 2 art. Trilli




**0252/3** Installation base for 3 art. Trilli




**0276** IP67 Connector with gel

## DRIVERS

### ON/OFF

| Cod. | 0031/IP<br>350mA | 0125<br>350m | 0128<br>350mA |
|---|---|---|---|
| **3547** | 1-12 | 1-6 | 1-12 |
| **3548** | 1-12 | 1-6 | 1-12 |
| **3549** | 1-12 | 1-6 | 1-12 |

### DIMMABLE

| Cod. | 141/DIM<br>PUSH - 1...10V | 0141/DALI<br>DIM DALI | 0145<br>DIM | 0145/DALI<br>DIM - DALI | 0733/DIM<br>PHASE CUT |
|---|---|---|---|---|---|
| **3547** | 4-14 | 5-14 | 1-21 | 1-21 | 1 |
| **3548** | 4-14 | 5-14 | 1-21 | 1-21 | 1 |
| **3549** | 4-14 | 5-14 | 1-21 | 1-21 | 1 |

Only serial connection

# TRILLI

## EXAMPLES OF MULTIPLE CONFIGURATION

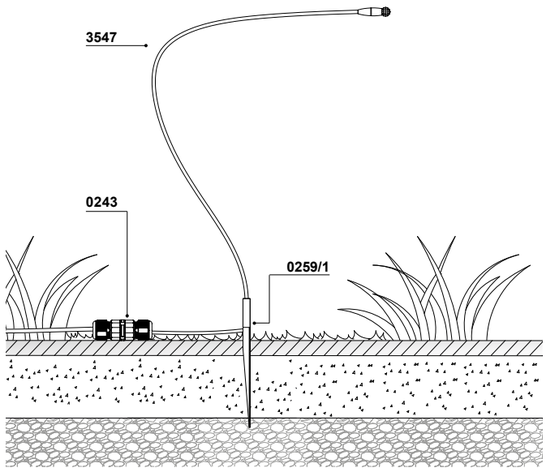


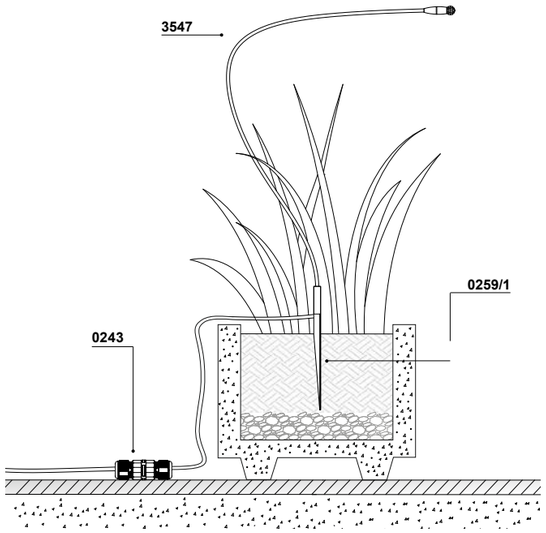


Soft copper pipe, when installed outdoors, will begin a spontaneous reaction with oxygen and water to form its own natural protective layer of copper oxide on its surface.
Depending on the composition of the water, the color of this layer varies from turquoise blue to deep green.

The choice of the driver depends on total power consumption.
The drivers, to be ordered separately, must be placed remotely

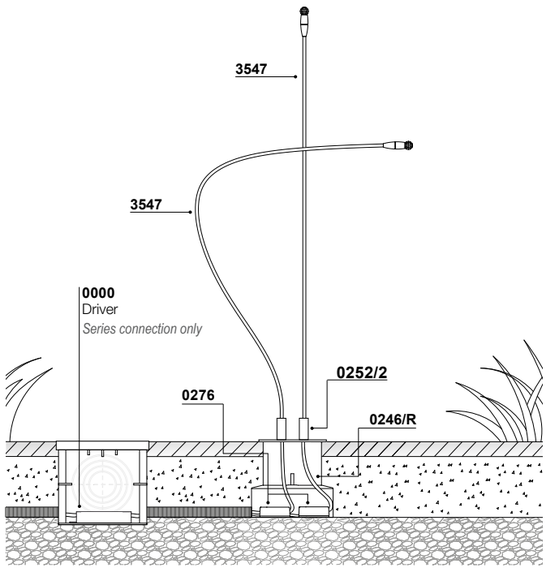

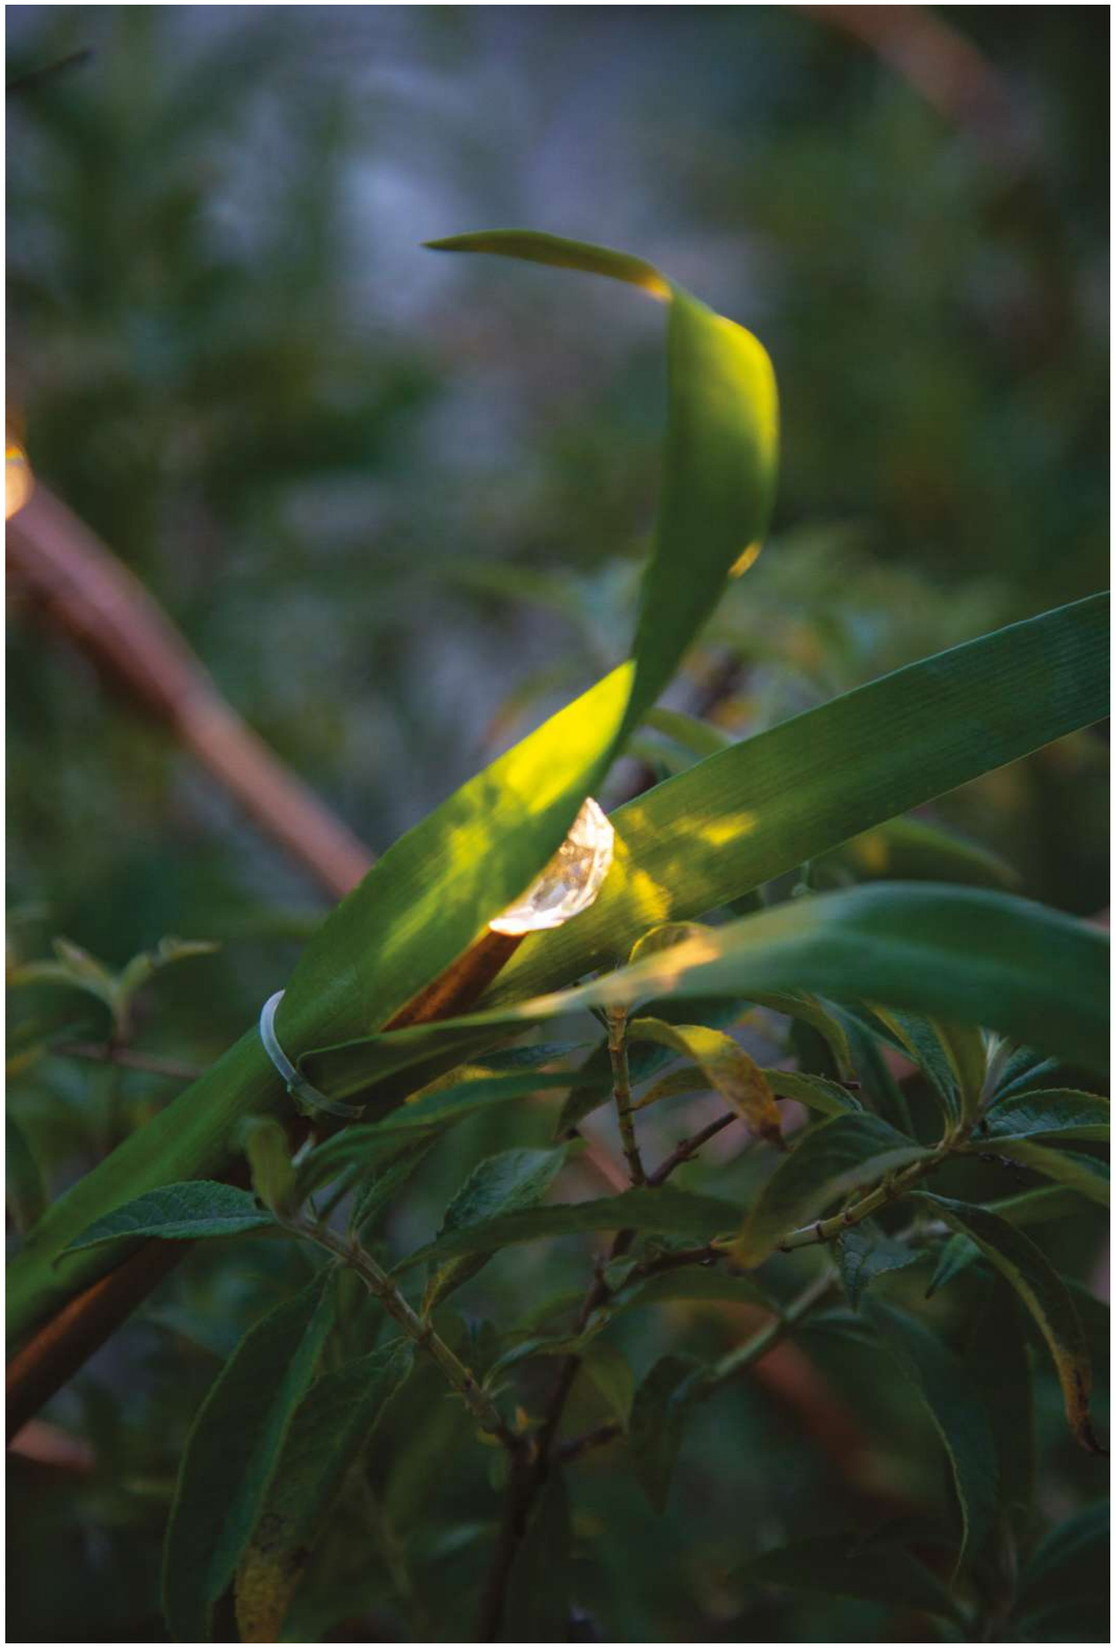

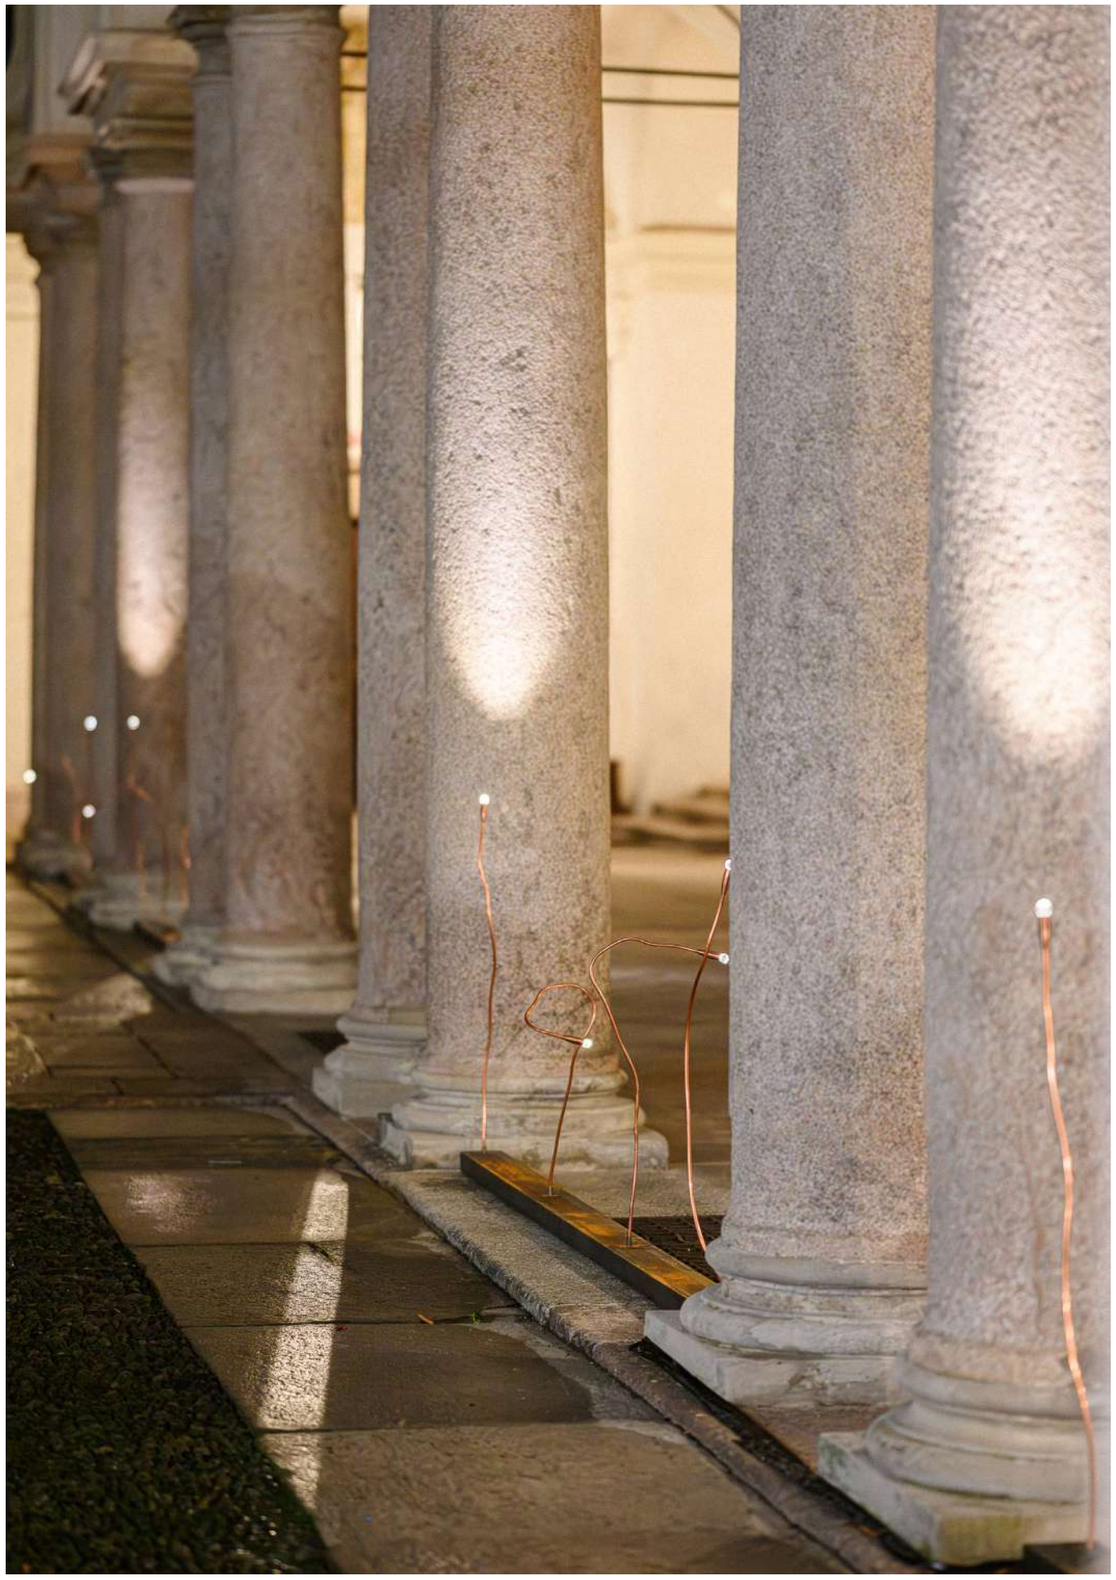

INDOOR

# ECLIPSE IP

Design ABS Studio

# ECLIPSE IP

Outdoor wall lamp with grazing radial emission light.
The body is made of anodized and painted die-cast aluminum, thescreen in opal methacrylate.
The front disc is in painted aluminum.
Eclipse IP is an outdoor lamp also designed to furnish with one delicate light that seems to caress the wall. It can be installed alone or in series to enrich a facade, a porch or a any exterior wall.

*Lampada da parete per esterni con luce radente a emissione radiale.*
*Il corpo è in alluminio pressofuso anodizzato e verniciato, lo schermo in metacrilato opalino.*
*Il disco frontale è in alluminio verniciato. Eclipse IP è una lampada da esterno pensata anche per arredare con una luce delicata che sembra accarezzare la parete. Può essere installata da sola o in serie per arricchire una facciata, un portico o una qualsiasi parete esterna.*

*Außenwandleuchte mit streifendem radialem Emissionslicht.*
*Der Korpus besteht aus eloxiertem und lackiertem Aluminium-Druckguss, der opale Methacrylatschirm. Die vordere Scheibe ist aus lackiertem Aluminium.*
*Eclipse IP ist eine Außenleuchte, die auch dazu gedacht ist, mit einem zarten Licht zu dekorieren, das die Wand zu streicheln scheint.*
*Es kann allein oder in Reihe installiert werden, um eine Fassade, eine Veranda oder jede andere Außenwand zu bereichern.*

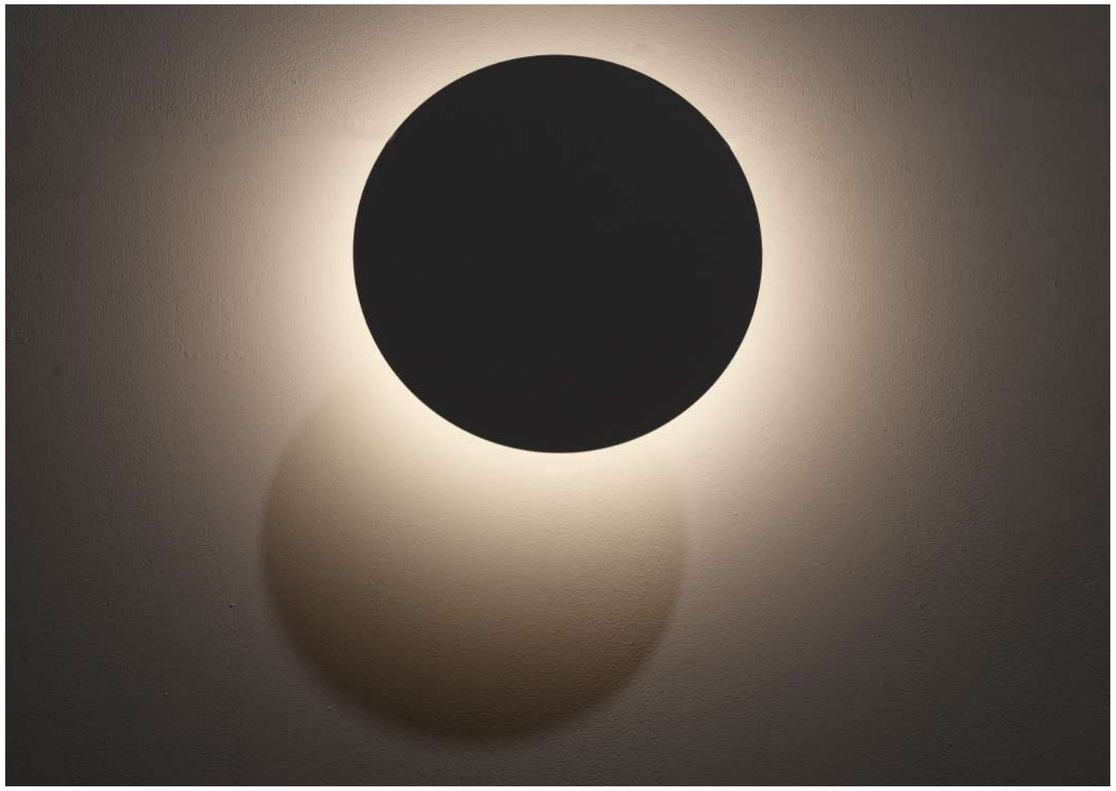

# ECLIPSE IP

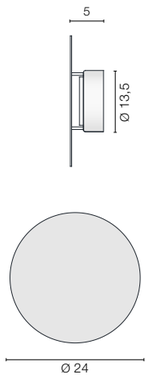


**4625** 1,50 Kg

| | | |
|---|---|---|
| **.01** | White | |
| **.34** | Painted Corten | |
| **.39** | Painted Anthracite | |

| | | | |
|---|---|---|---|
| **/WW** | 3000K | LED 8,7W | 670lm |

F IP65

## FINISHES CODES

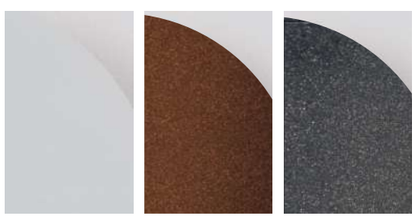

**.01** White **.34** Painted corten **.39** Painted Anthracite

**IN**DOOR / **OUT**DOOR

# LARA

Design Serge Cornelissen

# LARA

IP65 rechargeable and dimmable table lamp with metal frame, PVC diffuser and USB-C cable for charging included.
The battery life is 8 hours at 100% brightness and continuous dimming and the recharge time is 7 hours.

*Lampada da tavolo ricaricabile e dimmerabile IP65 con struttura in metallo, diffusore in PVC e cavo USB-C per la ricarica incluso.*
*La durata della batteria è di 8 ore con luminosità al 100% e dimmerazione continua, mentre il tempo di ricarica è di 7 ore.*

*Wiederaufladbare und dimmbare IP65-Tischleuchte mit Metallrahmen, PVC-Diffusor und USBC- Kabel zum Aufladen im Lieferumfang enthalten.*
*Die Akkulaufzeit beträgt 8 Stunden bei 100 % Helligkeit und stufenlosem Dimmen, die Aufladezeit 7 Stunden.*

# LARA

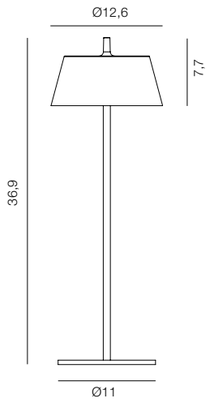

**2550** 0,65Kg

| | | |
|---|---|---|
| **.02** | Black | |
| **.06** | Green | |
| **.34** | Rust Brown | |
| **.39** | Anthracite | |

| | | | |
|---|---|---|---|
| **/WW** | 3000K | LED 2,2W | 117lm |
| **/XW** | 2700K | LED 2,2W | 117lm |

F III IP65 TW 2700K-3000K Dim




## FINISHES CODES

**.02** Black

**.06** Green

**.34** Rust Brown

**.39** Anthracite

**OUT**DOOR

# CERCHIO

Design U.T. Egoluce

# CERCHIO

IP67 walk-over recessed direct/diffused spotlight with AISI 316L stainless steel flange, aluminium heat sink and 30 cm neoprene cable

*Faretto da incasso a luce diretta/diffusa IP67 con flangia in acciaio inox AISI 316L, dissipatore di calore in alluminio e cavo in neoprene da 30 cm.*

*Begehbarer Direkt-/Diffusor-Einbaustrahler IP67 mit Flansch aus Edelstahl AISI 316L, Aluminiumkühlkörper und 30 cm Neoprenkabel*

# CERCHIO



**6389** 0,20 Kg

| | | | |
|---|---|---|---|
| **.33** | Stainless Steel AISI 316L | | |
| **/B** | LED BLU | max 1W 350mA | |
| **/W** | 4000K | max 1,5W 500mA | 221lm |
| **/WW** | 3000K | max 1,5W 500mA | 210lm |
| **/XW** | 2700K | max 1,5W 500mA | 199lm |

F III IP67 50 cm 1000 kg T< 40°C



**.33/B**



**.33/W**



**.33/WW**



**.33/XW**

## FINISHES CODES



**.01** White

## ACCESSORIES

Kit
**0250**

Kit draining junction
+ IP connector

Box
**0217**

Plastic box

## DRIVERS

**ON/OFF**

| **Cod.** | **0125** 350mA | **0128** 350mA | **0127** 500mA |
|---|---|---|---|
| **6389** | 1-6 | 1-10 | 1-6 |

**DIMMABLE**

| | **0141/DIM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM DALI |
|---|---|---|---|---|
| **6389** | 1-11 | 1-11 | 1-21 | 1-21 |

Only serial connection

**IP67 DRIVER**

| **Cod.** | **0033/IP** 350mA | **0143/IP** 500mA |
|---|---|---|
| **6389** | 1-10 | 1-7 |

# CERCHIO RGB



**6390** 0,30 Kg

**.33** Stainless Steel AISI 316L

3 x 250mA

F III IP67 50 cm 1000 kg T< 40°C

## FINISHES CODES



**.01** White



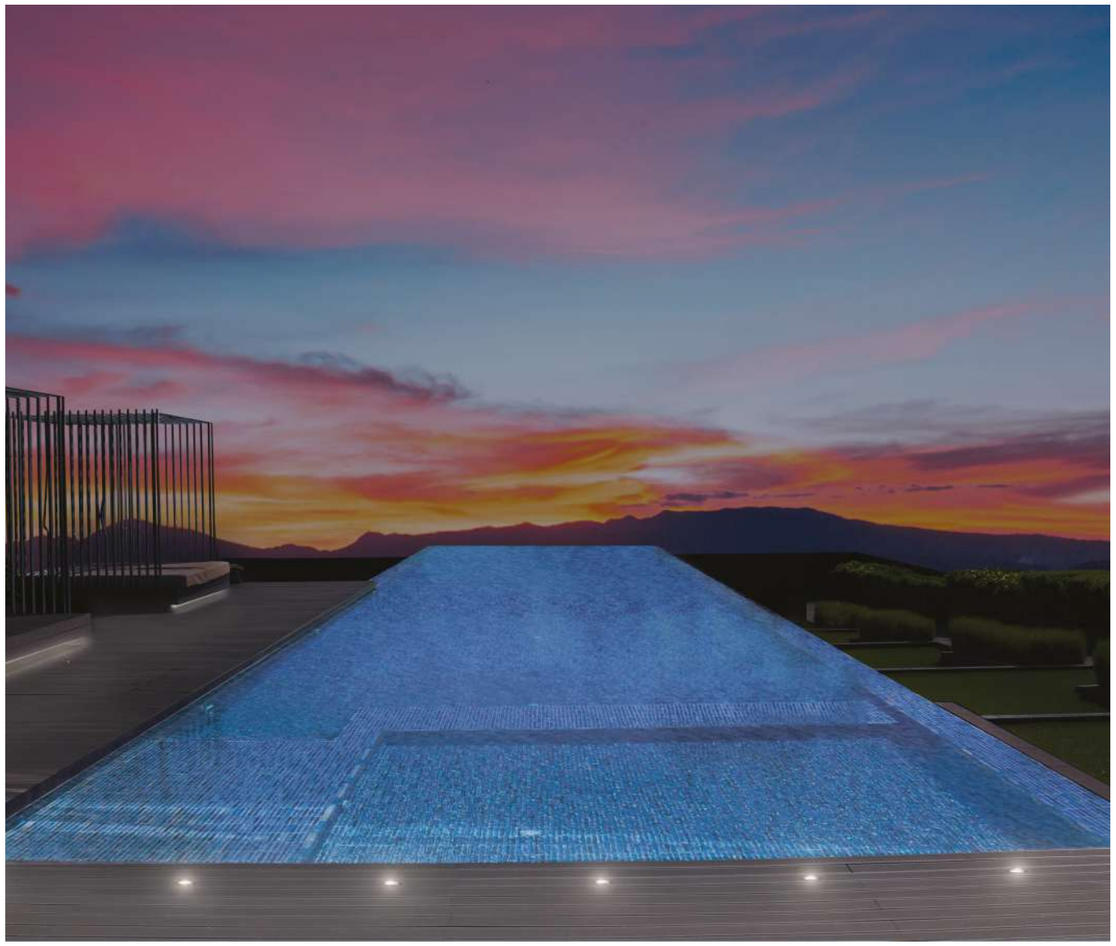

## ACCESSORIES

Kit
**0251**
Draining junction

Box
**0217**
Plastic box

## DRIVERS

**DRIVER RGB**

**0164** 120W
**0167** 22W

IN 230V - OUT 3 X 24V

**DRIVER RGB CASAMBI**

**0164/CASA**
120W

IN 230V - OUT 3 X 24V

**SENSOR & CABLE RGB**

**0163**
IR Sensor

**0165**
IR Remote controller

**0166**
Sync Cable

**CONVERTER RGB**

**0168**
IN 24V - OUT 3 X 250mA 1-5 Cerchio RGB

**OUT**DOOR

# KROSS

Design U.T. Egoluce

# KROSS

IP67 walkable downlight with radial light with AISI 316L stainless steel flange, aluminium heat sink and 30 cm neoprene cable.

*Downlight calpestabile IP67 a luce radiale con flangia in acciaio inox AISI 316L, dissipatore di calore in alluminio e cavo in neoprene da 30 cm.*

*Begehbares IP67-Downlight mit Radiallicht mit Flansch aus Edelstahl AISI 316L, Aluminiumkühlkörper und 30 cm Neoprenkabel.*

# KROSS






**6361** 0,10 Kg

| | | | |
|---|---|---|---|
| **.33** | Stainless Steel AISI 316L | | |
| **/B** | LED BLU | 1W 350mA | |
| **/W** | 4000K | max 1,5W 500mA | 221lm |
| **/WW** | 3000K | max 1,5W 500mA | 210lm |
| **/XW** | 2700K | max 1,5W 500mA | 199lm |

F III IP67 30 cm 500 kg T< 40°C

ETL version available upon request



**.33/W**

**.33/WW**



**.33/B**

## FINISHES CODES

**.33** Stainless Steel AISI 316L

## ACCESSORIES

Kit
**0220**

Kit draining junction + IP connector

Box
**0216**

Plastic box

Spring for plasterboard included

3,2 cm

## DRIVERS

**ON/OFF**

| **Cod.** | **0125** 350mA | **0128** 350mA | **0127** 500mA |
|---|---|---|---|
| **6361** | 1-6 | 1-10 | 1-6 |

**DIMMABLE**

| **0141/DIM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM DALI |
|---|---|---|---|
| **6361** 1-11 | 1-11 | 1-21 | 1-21 |

Only serial connection

**IP67 DRIVER**

| **Cod.** | **0031/IP** 350mA | **0143/IP** 500mA |
|---|---|---|
| **6361** | 1-12 | 1-7 |

# KROSS MINI



**6735** 0,07 Kg

| | | | |
|---|---|---|---|
| **.33** | Stainless Steel AISI 316L | | |
| **/W** | 4000K | 1W 350mA | 158lm |
| **/WW** | 3000K | 1W 350mA | 150lm |
| **/XW** | 2700K | 1W 350mA | 143lm |

F III IP67 30 cm 500 kg T< 40°C

## ACCESSORIES

Box
**0215**

Plastic box

Spring for plasterboard included

2,2 cm

## FINISHES CODES

**.33** Stainless Steel AISI 316L

## DRIVERS

**ON/OFF**

| **Cod.** | **0125** 350mA | **0128** 350mA |
|---|---|---|
| **6735** | 1-6 | 1-10 |

**DIMMABLE**

| | **0141/DIM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM DALI |
|---|---|---|---|---|
| **6735** | 1-12 | 1-12 | 1-21 | 1-21 |

Only serial connection

**IP67 DRIVER**

| **Cod.** | **0031/IP** 350mA |
|---|---|
| **6735** | 1-12 |

**OUT**DOOR

# VISTA

Design U.T. Egoluce

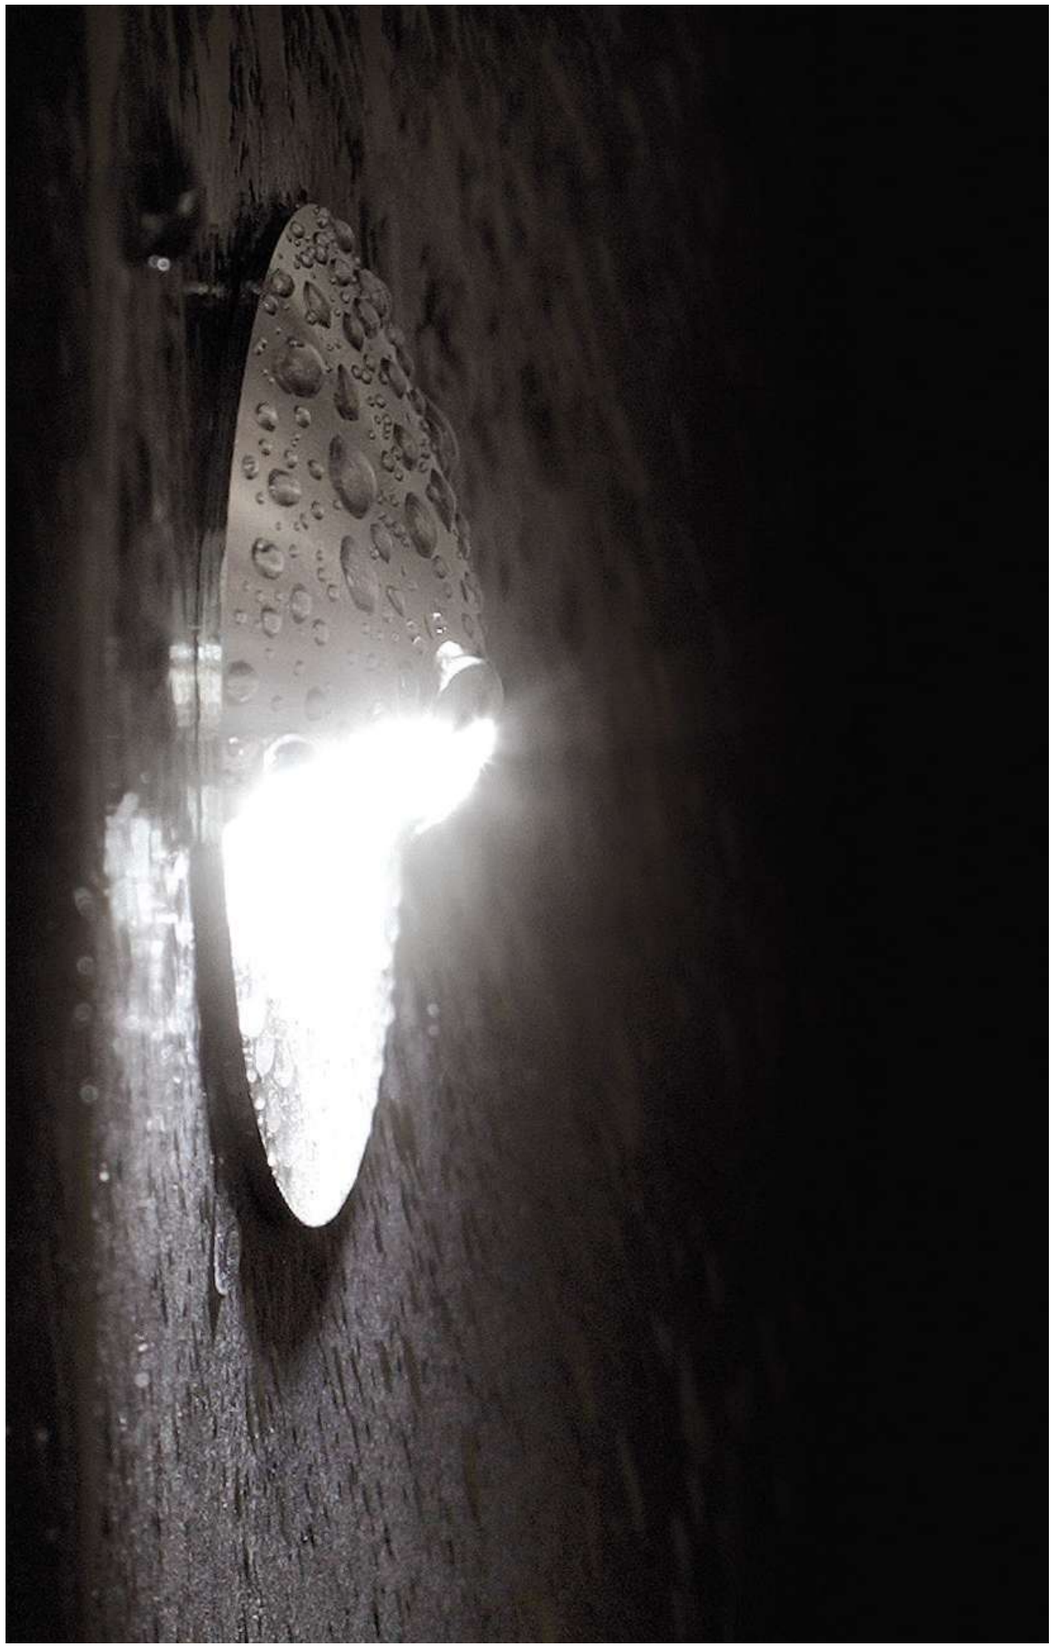

# VISTA

IP67 walkable downlight with radial light with AISI 316L stainless steel flange, aluminium heat sink and 30 cm neoprene cable.

*Downlight calpestabile IP67 a luce radiale con flangia in acciaio inox AISI 316L, dissipatore di calore in alluminio e cavo in neoprene da 30 cm.*

*Begehbares IP67-Downlight mit Radiallicht mit Flansch aus Edelstahl AISI 316L, Aluminiumkühlkörper und 30 cm Neoprenkabel.*

# VISTA







3 cm

**6362** 0,10 Kg

| | | | |
|---|---|---|---|
| **.33** | Stainless Steel AISI 316L | | |
| **/W** | 4000K | max 1,5W 500mA | 221lm |
| **/WW** | 3000K | max 1,5W 500mA | 210lm |
| **/XW** | 2700K | max 1,5W 500mA | 199lm |

F III IP67 30 cm 500 kg T< -40°C

ETL version available upon request

## FINISHES CODES

**.33** Stainless Steel AISI 316L



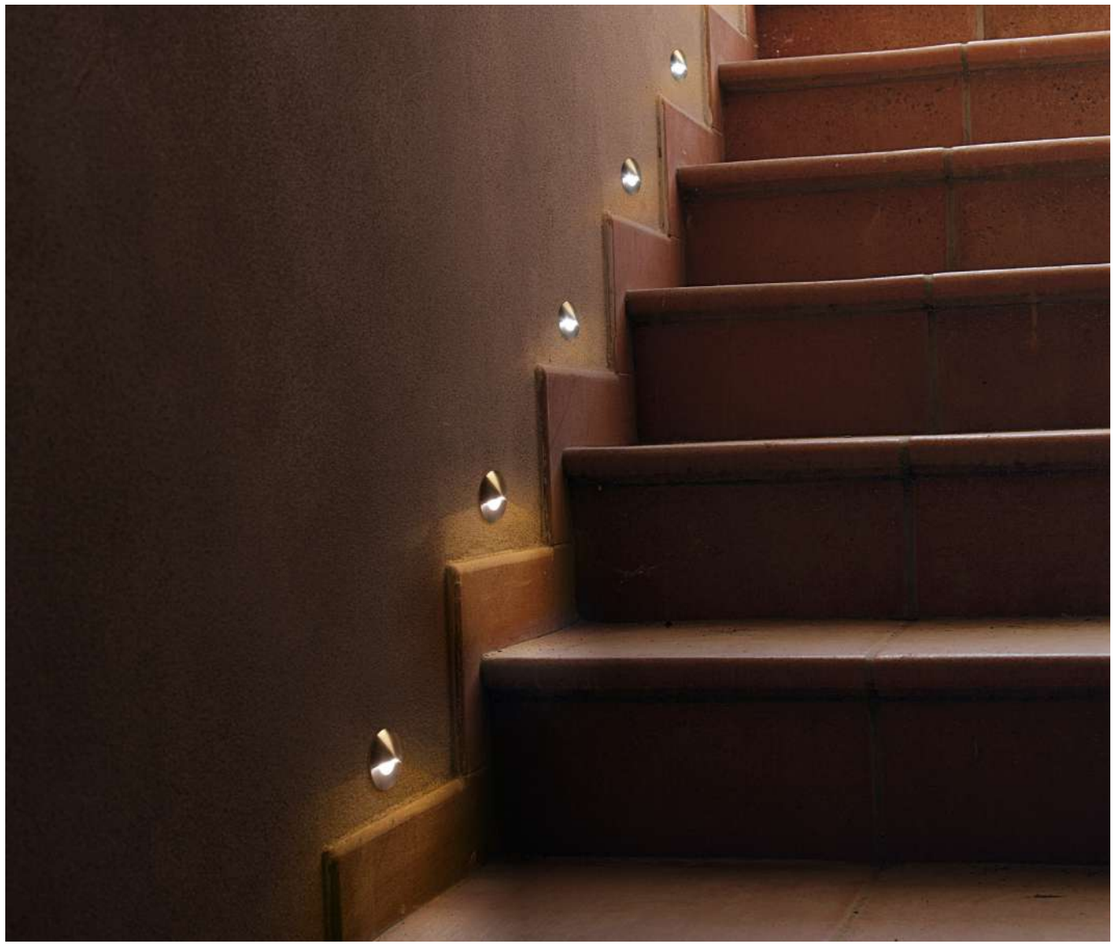

## ACCESSORIES

Kit
**0220**

Kit draining junction + IP connector

Box
**0216**

Plastic box

Spring for plasterboard included

3,2 cm

## DRIVERS

**ON/OFF**

| **Cod.** | **0125** 350mA | **0128** 350mA | **0127** 500mA |
|---|---|---|---|
| **6362** | 1-6 | 1-10 | 1-6 |

**DIMMABLE**

| | **0141/DIM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM DALI |
|---|---|---|---|---|
| **6362** | 1-11 | 1-11 | 1-21 | 1-21 |

Only serial connection

**IP67 DRIVER**

| **Cod.** | **0031/IP** 350mA | **0143/IP** 500mA |
|---|---|---|
| **6362** | 1-12 | 1-7 |

# VISTA MINI



**6374** 0,07 Kg

| | | | |
|---|---|---|---|
| **.33** | Stainless Steel AISI 316L | | |
| **/W** | 4000K | 1W 350mA | 158lm |
| **/WW** | 3000K | 1W 350mA | 150lm |
| **/XW** | 2700K | 1W 350mA | 143lm |

F III IP67 30 cm 500 kg T< -40°C

## FINISHES CODES

**.33** Stainless Steel AISI 316L

## ACCESSORIES

Box
**0215**
Plastic box

Spring for plasterboard included

2,2 cm

## DRIVERS

**ON/OFF**

| **Cod.** | **0125** 350mA | **0128** 350mA |
|---|---|---|
| **6374** | 1-6 | 1-10 |

**DIMMABLE**

| | **0141/DIM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM DALI |
|---|---|---|---|---|
| **6374** | 1-12 | 1-12 | 1-21 | 1-21 |

Only serial connection

**IP67 DRIVER**

| **Cod.** | **0031/IP** 350mA |
|---|---|
| **6374** | 1-12 |

**OUT**DOOR

# DRIVE

Design U.T. Egoluce

# DRIVE

IP67 driveway recessed diffused spotlight with AISI 316L stainless steel flange, screen-printed opal glass diffuser, aluminium heat sink, frosted glass screen and neoprene cable.

*Faretto diffuso da incasso calpestabile IP67 con flangia in acciaio inox AISI 316L, diffusore in vetro opalino serigrafato, dissipatore di calore in alluminio, schermo in vetro satinato e cavo in neoprene.*

*Diffuser Einbaustrahler IP67 mit Flansch aus Edelstahl AISI 316L, Diffusor aus Opalglas mit Siebdruck, Kühlkörper aus Aluminium, Mattglasscheibe und Neoprenkabel*

# DRIVE



**6729** 0,40 Kg

**.33** Stainless Steel AISI 316L

| | | | |
|---|---|---|---|
| **/W** | 4000K | LED 4W 24V | 658lm |
| **/WW** | 3000K | LED 4W 24V | 608lm |
| **/XW** | 2700K | LED 4W 24V | 562lm |

F III IP67 30 cm 2000 Kg T<-50°C

Driveover recessed spot 2000Kg

## ACCESSORIES

Kit
**0229**

Kit draining junction
+ IP connector

## FINISHES CODES

**.33** Stainless Steel AISI 316L

## DRIVERS

**ON/OFF**

| **Cod.** | **0155** 24V - 13W | **0156** 24V - 25W |
|---|---|---|
| **6729** | 1-2 | 1-4 |

**DIMMABLE**

| | **0717/DIM60/V** PUSH - 1...10V | **0717/DIM60** DALI - PUSH |
|---|---|---|
| **6729** | 1-10 | 1-10 |

Only Parallel connection

**IP67 DRIVER**

| **Cod.** | **0033/IP** 24V 14,4W | **0037/IP** 24V 60W |
|---|---|---|
| **6729** | 1-2 | 1-10 |

**OUT**DOOR

# TRIS

Design U.T. Egoluce

# TRIS

IP67 walk-over recessed outdoor spotlight with AISI 316L stainless steel flange and aluminium heat sink, fitted with clear protective glass and 30 cm neoprene cable.

*Faretto da incasso per esterni IP67 con flangia in acciaio inox AISI 316L e dissipatore di calore in alluminio, dotato di vetro di protezione trasparente e cavo in neoprene da 30 cm.*

*Begehbarer IP67-Einbaustrahler für den Außenbereich mit Flansch aus Edelstahl AISI 316L und Kühlkörper aus Aluminium, ausgestattet mit klarem Schutzglas und 30 cm Neoprenkabel.*

# TRIS







8,5 cm

**6371** 0,40 Kg

| | | | |
|---|---|---|---|
| **.33** | Stainless Steel AISI 316L | | |
| **/W** | 4000K | max 3x1,5W 500mA | 663lm |
| **/WW** | 3000K | max 3x1,5W 500mA | 630lm |
| **/XW** | 2700K | max 3x1,5W 500mA | 597lm |

F III IP67 30 cm 1000 kg T<-50°C

ETL version available upon request

## FINISHES CODES

**.33** Stainless Steel AISI 316L

## ACCESSORIES

Kit
**0231**
Kit draining junction + IP connector

Box
**0235**
Wall plastic box

Connector
**0243**
IP connector

Kit
**0233**
Spring for plaster-board

8,5 cm

## DRIVERS

**ON/OFF**

| **Cod.** | **0125** 350mA | **0128** 350mA | **0127** 500mA |
|---|---|---|---|
| **6371** | 1-2 | 1-3 | 1-2 |

**DIMMABLE**

| | **0141/DIM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM DALI |
|---|---|---|---|---|
| **6371** | 1-3 | 1-3 | 1-7 | 1-7 |

Only serial connection

**IP67 DRIVER**

| **Cod.** | **0031/IP** 350mA | **0143/IP** 500mA |
|---|---|---|
| **6371** | 1-3 | 1-2 |

OUTDOOR
SOFT
Design U.T. Egoluce

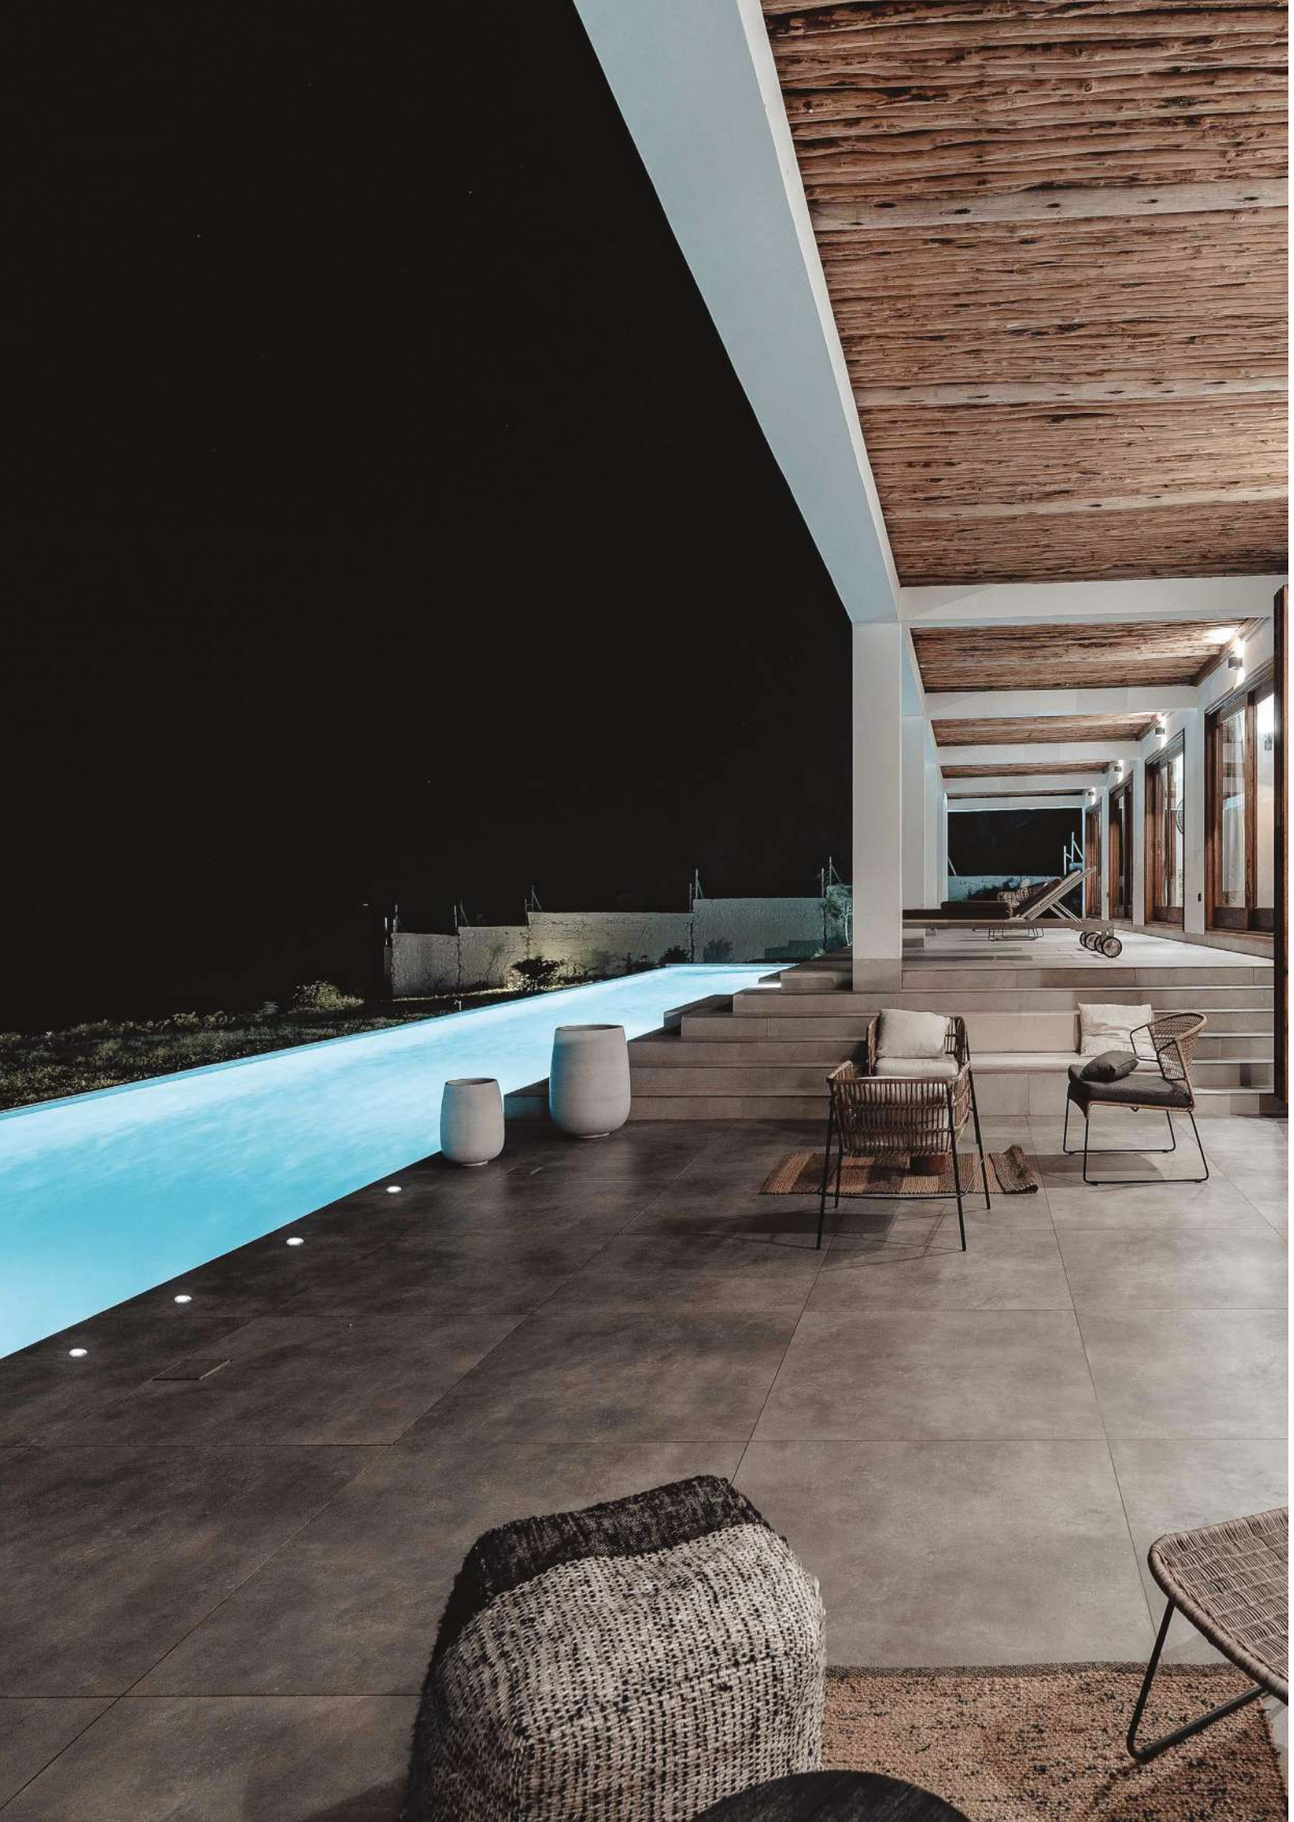

## SOFT

IP67 walk-over downlight with AISI 316L stainless steel round flange, aluminium heat sink, frosted safety glass and 30 cm neoprene cable.

*Faretto calpestabile IP67 con flangia circolare in acciaio inox AISI 316L, dissipatore di calore in alluminio, vetro di sicurezza satinato e cavo in neoprene da 30 cm.*

*Begehbares Downlight IP67 mit rundem Flansch aus Edelstahl AISI 316L, Kühlkörper aus Aluminium, mattiertem Sicherheitsglas und 30 cm Neoprenkabel.*

# SOFT



**6388** 0,11 Kg

| | | |
|---|---|---|
| **.33** | Stainless Steel AISI 316L | |
| **/W** | 4000K | LED 1,5W 12V |
| **/WW** | 3000K | LED 1,5W 12V |

F III IP67 30 cm 500 kg T< 40°C

## ACCESSORIES

Kit
**0250**

Kit draining junction
+ IP connector

Box
**0217**

Plastic box

## FINISHES CODES

**.33** Stainless Steel
AISI 316L

## DRIVERS

**ON/OFF**

| | | |
|---|---|---|
| **Cod.** | **0158** 12V - 25W | |
| **6388** | 1-15 | |

**DIMMABLE**

| | | |
|---|---|---|
| | **0129** Multi power dimmable driver | **0129/DALI** Multi power DALI dimmable driver |
| **6388** | 1-6 | 1-6 |

Only Parallel connection

**IP67 DRIVER**

| | |
|---|---|
| **Cod.** | **0036/IP** 12V 14,4W |
| **6388** | 1-8 |

**OUT**DOOR

# STEP MINI

Design U.T. Egoluce

# STEP MINI

Outdoor recessed spotlight (IP 65) with asymmetrical light in anodised or white painted aluminium with reinforced outdoor finish and neoprene cable.

*Faretto da incasso per esterni (IP 65) a luce asimmetrica in alluminio anodizzato o verniciato bianco con finitura esterna rinforzata e cavo in neoprene.*

*Einbaustrahler für den Außenbereich (IP 65) mit asymmetrischem Licht aus eloxiertem oder weiß lackiertem Aluminium mit verstärkter Außenlackierung und Neoprenkabel.*

# STEP MINI



**6738** 0,08 Kg

| | | | |
|---|---|---|---|
| **.01** | White | | |
| **.45** | Anodized Aluminium | | |
| **/W** | 4000K | 1W 350mA | 158lm |
| **/WW** | 3000K | 1W 350mA | 150lm |
| **/XW** | 2700K | 1W 350mA | 143lm |

F III IP65 30 cm




**6739** 0,08 Kg

| | | | |
|---|---|---|---|
| **.01** | White | | |
| **.45** | Anodized Aluminium | | |
| **/W** | 4000K | 1W 350mA | 158lm |
| **/WW** | 3000K | 1W 350mA | 150lm |
| **/XW** | 2700K | 1W 350mA | 143lm |

F III IP65 30 cm

## FINISHES CODES

**.01** White

**.45** Anodized Aluminium



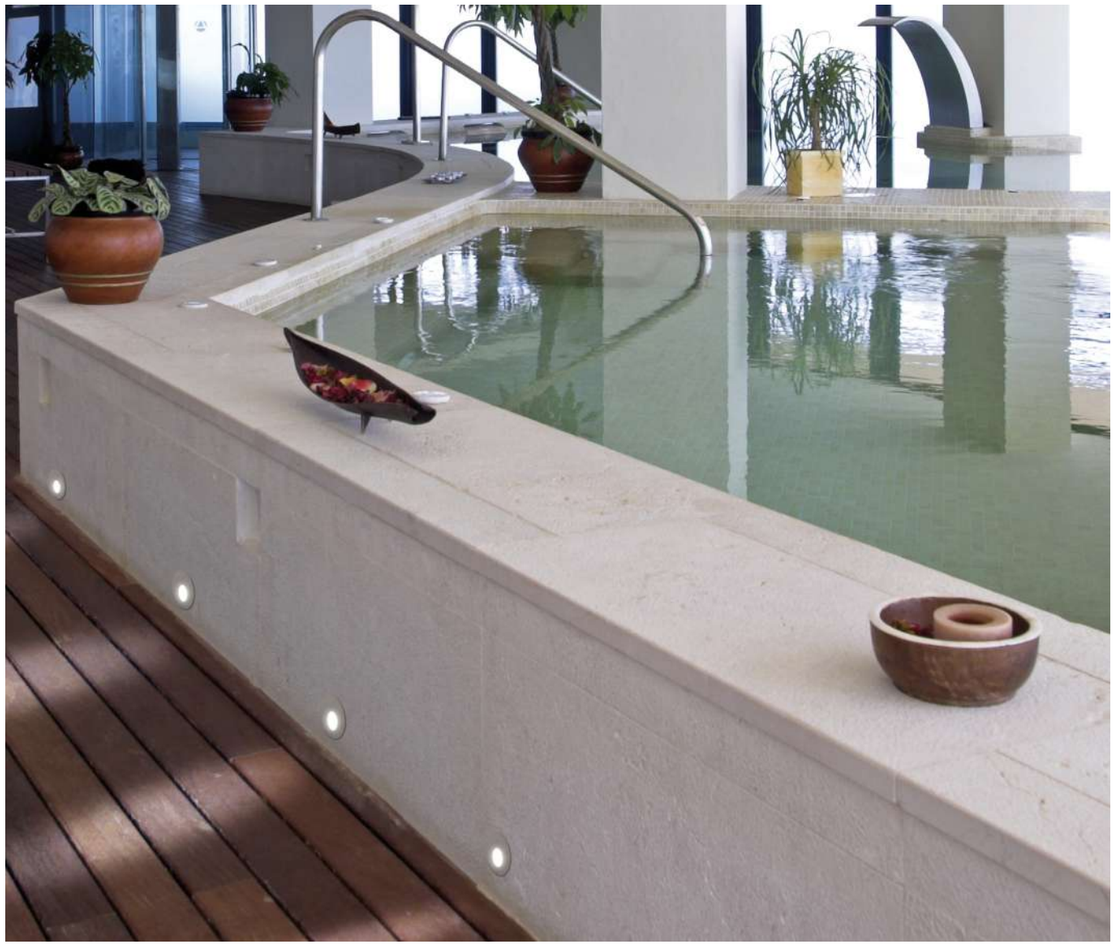

## ACCESSORIES

Kit
**0214**
Box + Plaster

Box
**0217**
Plastic box

## DRIVERS

**ON/OFF**

| **Cod.** | **0125** 350mA | **0128** 350mA |
|---|---|---|
| **6738** | 1-6 | 1-10 |
| **6739** | 1-6 | 1-10 |

**DIMMABLE**

| | **0141/DIM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM DALI |
|---|---|---|---|---|
| **6738** | 1-12 | 1-12 | 1-21 | 1-21 |
| **6739** | 1-12 | 1-12 | 1-21 | 1-21 |

Only serial connection

**IP67 DRIVER**

| **Cod.** | **0031/IP** 350mA |
|---|---|
| **6738** | 1-12 |
| **6739** | 1-12 |

**OUT**DOOR

# STAR IP

Design U.T. Egoluce

# STAR

RGB, IP65, recessed mini trim spotlight with integrated high performance COB LED source, aluminum body, round frame, glass screen and accessory supplied for installation on plasterboard ceilings.

On request, round and square formworks are available for installation in plasterboard for a total disappearance of the spotlight.

The small size and the degree of protection make it ideal for lighting small rooms, outdoor niches, bathrooms and shower boxes.

*Faretto mini trim RGB, IP65 da incasso con sorgente COB LED integrata ad elevate prestazioni, corpo in alluminio, cornice tonda, schermo in vetro e accessorio in dotazione per installazioni su soffitti in cartongesso.*

*Su richiesta sono disponibili casseforme tonde e quadrate per l'installazione in cartongesso per una scomparsa totale del faretto.*

*Le ridotte dimensioni e il grado di protezione lo rendono ideale illuminare piccoli ambienti, nicchie in esterno, bagni e box doccia.*

*RGB, IP65, Mini-Einbaustrahler mit integrierter COB-Hochleistungs-LED-Quelle, Aluminiumgehäuse, rundem Rahmen, Glasscheibe und mitgeliefertem Zubehör für die Installation an Gipskartondecken.*

*Auf Anfrage sind runde und quadratische Schalungen für den Einbau in Gipskartonplatten erhältlich, um den Strahler vollständig verschwinden zu lassen.*

*Die geringe Größe und die Schutzart machen ihn ideal für die Beleuchtung kleiner Räume, Nischen im Freien, Bäder und Duschkabinen.*

# STAR IP - STAR RGB







**6692** 0,12 Kg

| | |
|---|---|
| **.01** | White |
| **.02** | Black |
| **.31** | Chromed |

| | | | |
|---|---|---|---|
| **/W** | 4000K | LED 17V 2,4W 150mA | 398lm |
| **/WW** | 3000K | LED 17V 2,4W 150mA | 376lm |
| **/XW** | 2700K | LED 17V 2,4W 150mA | 360lm |

F III IP54 CRI >90

**6693** 0,14 Kg

| | |
|---|---|
| **.01** | White |
| **.02** | Black |
| **.31** | Chromed |

LED 3 x 250mA

F III IP65

## ACCESSORIES

Trimless recessed installation in plasterboard
**0206**

**.01** White
**.01** Black

Round wall box for installation in plasterboard false ceiling

Brick installation
**0225**

Recessed box for brick mounting

Installation in concrete
**0223**

Recessed box for concrete mounting

Trimless recessed installation in plasterboard
**0207**

**.01** White
**.01** Black

Square wall box for installation in plasterboard false ceiling

Brick installation
**0224/C**

Perforated plaster kit

## FINISHES CODES

**.01** White

**.02** Black

**.31** Chromed

*Project Studio Keyart Milano*

## DRIVERS

**ON/OFF**

| | |
|---|---|
| **Cod.** | **0151/150** 150mA |
| **6692** | 1-2 |

Only serial connection

**DRIVER RGB**

| | |
|---|---|
| **0164** 120W | **0167** 22W |

IN 230V - OUT 3 X 24V

**CONVERTER RGB CASAMBI**

**0168**
IN 24V - OUT 3 X 250mA 1-5 Star RGB

**DRIVER RGB CASAMBI**

**0164/CASA**
120W

IN 230V - OUT 3 X 24V

**SENSOR & CABLE RGB**

**0163**
IR Sensor

**0165**
IR Remote controller

**0166**
Sync Cable

**IN**DOOR / **OUT**DOOR

# ZEPPELIN

Design U.T. Egoluce

# ZEPPELIN

Series of walkable downlights (IP 67) with AISI 316L stainless steel flange, aluminum heat sink and 30cm neoprene cable. Available in round and square versions. Formwork or plasterboard mounting with special accessory.

*Serie di downlight calpestabili (IP 67) con flangia in acciaio inox AISI 316L, dissipatore di calore in alluminio e cavo in neoprene da 30 cm. Disponibile nelle versioni tonda e quadrata. Montaggio su cassaforma o cartongesso con accessorio speciale.*

*Serie von begehbaren Downlights (IP 67) mit Flansch aus rostfreiem Stahl AISI 316L, Kühlkörper aus Aluminium und 30cm Neoprenkabel. Erhältlich in runder und quadratischer Ausführung. Montage auf Schalung oder Gipskarton mit speziellem Zubehör.*

# ZEPPELIN

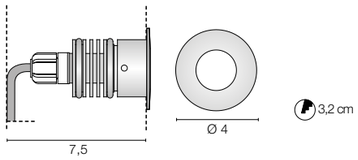

**6348.33/** 0,08 Kg

| | | | |
|---|---|---|---|
| **.33** | Stainless Steel AISI 316L | | |
| **/W** | 4000K | max LED 1,5W 500mA | 221lm |
| **/WW** | 3000K | max LED 1,5W 500mA | 210lm |
| **/XW** | 2700K | max LED 1,5W 500mA | 199lm |

F III IP67 30 cm 500 kg T< 40°C 73°

ETL version available upon request

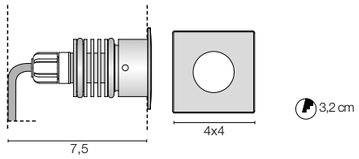


**6349.33/** 0,10 Kg

| | | | |
|---|---|---|---|
| **.33** | Stainless Steel AISI 316L | | |
| **/W** | 4000K | max LED 1,5W 500mA | 221lm |
| **/WW** | 3000K | max LED 1,5W 500mA | 210lm |
| **/XW** | 2700K | max LED 1,5W 500mA | 199lm |

F III IP67 30 cm 500 kg T< 40°C 73°

ETL version available upon request

## ACCESSORIES

Kit
**0220**

Draining junction + IP Connector

Box
**0216**

Plastic box

Spring for plasterbox Included

## DRIVERS

**ON/OFF**

| **Cod.** | **0125** 350mA | **0128** 350m | **0127** 500mA |
|---|---|---|---|
| **6348** | 1-6 | 1-10 | 1-6 |
| **6349** | 1-6 | 1-10 | 1-2 |

**IP67 DRIVER**

| **Cod.** | **0031/IP** 350mA | **0143/IP** 500mA |
|---|---|---|
| **6348** | 1-12 | 1-7 |
| **6349** | 1-12 | 1-7 |

**DIMMABLE**

| | **0141/DIM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM - DALI |
|---|---|---|---|---|
| **6348** | 2-11 | 2-11 | 1-21 | 1-21 |
| **6349** | 2-11 | 2-11 | 1-21 | 1-21 |

Only serial connection



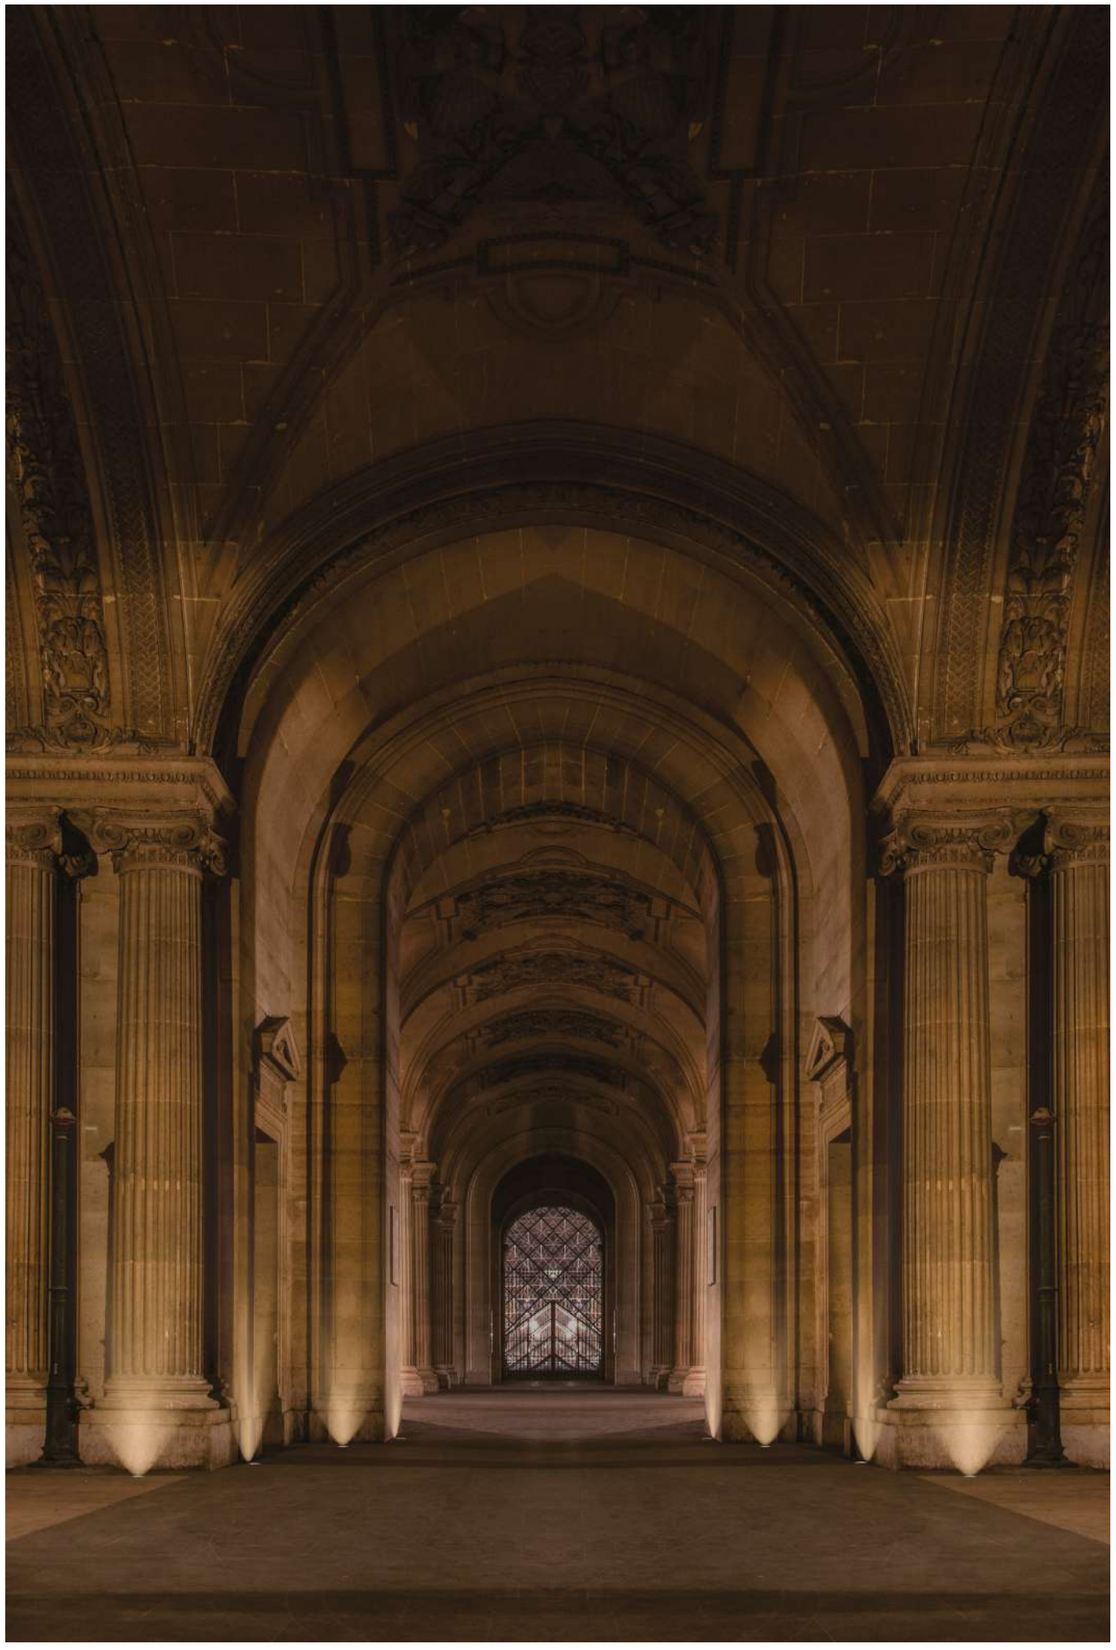

# ZEPPELIN RGB



**6376.33/** 0,20 Kg

**.33** Stainless Steel AISI 316L

LED 3 x 250mA

F III IP67 100 cm 500 kg T< 40°C




**6395.33/** 0,20 Kg

**.33** Stainless Steel AISI 316L

LED 3 x 250mA

F III IP67 100 cm 500 kg T< 40°C

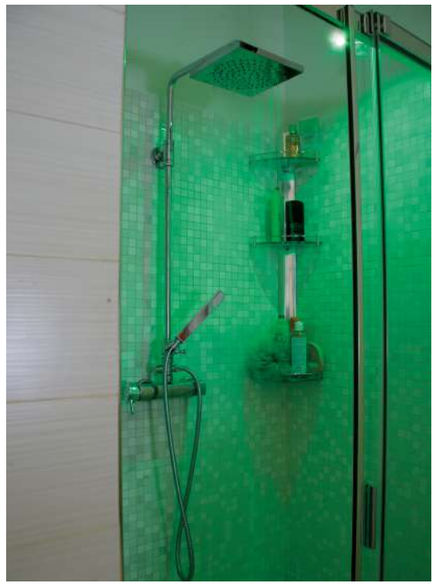

## ACCESSORIES

Kit
**0228**
Draining junction

Box
**0216**
Plastic box

Spring for plasterbox Included

## DRIVERS

**DRIVER RGB**

**0164** 120W

**0167** 22W

IN 230V - OUT 3 X 24V

**DRIVER RGB CASAMBI**

**0164/CASA**
120W

IN 230V - OUT 3 X 24V

**CONVERTER RGB**

**0168**
IN 24V - OUT 3 X 250mA 1-5 Zeppelin RGB

**SENSOR & CABLE RGB**

**0163**
IR Sensor

**0165**
IR Remote controller

**0166**
Sync Cable

# ZEPPELIN PLUS







3,2 cm

**6384.33/** 0,08 Kg

**.33** Stainless Steel AISI 316L

| | | | | | | |
|---|---|---|---|---|---|---|
| **/W** | 4000K | /11 | /25 | /45 | max LED 1,5W 500mA | 221lm |
| **/WW** | 3000K | /11 | /25 | /45 | max LED 1,5W 500mA | 210lm |
| **/XW** | 2700K | /11 | /25 | /45 | max LED 1,5W 500mA | 199lm |

F III IP67 30 cm 500 kg T< 40°C

ETL version available upon request







3,2 cm

**6394.33/** 0,10 Kg

**.33** Stainless Steel AISI 316L

| | | | | | | |
|---|---|---|---|---|---|---|
| **/W** | 4000K | /11 | /25 | /45 | max LED 1,5W 500mA | 221lm |
| **/WW** | 3000K | /11 | /25 | /45 | max LED 1,5W 500mA | 210lm |
| **/XW** | 2700K | /11 | /25 | /45 | max LED 1,5W 500mA | 199lm |

F III IP67 30 cm 500 kg T< 40°C

ETL version available upon request

## ACCESSORIES

Kit
**0220**

Draining junction + IP Connector

Box
**0216**

Plastic box

Spring for plasterbox Included

## DRIVERS

**ON/OFF**

| **Cod.** | **0125** 350mA | **0128** 350m | **0127** 500mA |
|---|---|---|---|
| **6384** | 1-6 | 1-10 | 1-6 |
| **6394** | 1-6 | 1-10 | 1-6 |

**DIMMABLE**

| | **0141/DIM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM - DALI |
|---|---|---|---|---|
| **6384** | 2-11 | 2-11 | 1-21 | 1-21 |
| **6394** | 2-11 | 2-11 | 1-21 | 1-21 |

Only serial connection

**IP67 DRIVER**

| **Cod.** | **0031/IP** 350mA | **0143/IP** 500mA |
|---|---|---|
| **6384** | 1-12 | 1-7 |
| **6394** | 1-12 | 1-7 |

# ZEPPELIN MAXI



**6736.33/** 0,40 Kg

| | | | |
|---|---|---|---|
| **.33** | Stainless Steel AISI 316L | | |
| **/W** | 4000K | LED 4W 24V | 658lm |
| **/WW** | 3000K | LED 4W 24V | 608lm |
| **/XW** | 2700K | LED 4W 24V | 562lm |

F III IP67 30 cm 1000 kg T< 50°C

Only Parallel connection




**6737.33/** 0,35 Kg

| | | | |
|---|---|---|---|
| **.33** | Stainless Steel AISI 316L | | |
| **/W** | 4000K | LED 4W 24V | 658lm |
| **/WW** | 3000K | LED 4W 24V | 608lm |
| **/XW** | 2700K | LED 4W 24V | 562lm |

F III IP67 30 cm 1000 kg T< 50°C

Only Parallel connection

## ACCESSORIES

Kit
**0230**

Draining junction + IP Connector

Box
**0232**

Wall Plastic box

Spring
**0260/C**

Spring for plasterboard

## DRIVERS

**ON/OFF**

| **Cod.** | **0155** 24V - 13W | **0156** 24V - 25W |
|---|---|---|
| **6736** | 1-2 | 1-5 |
| **6737** | 1-2 | 1-5 |

**DIMMABLE**

| | **0717/DIM60/V** PUSH - 1...10V | **0717/DIM60** DALI - PUSH |
|---|---|---|
| **6736** | 1-12 | 1-12 |
| **6737** | 1-12 | 1-12 |

Only Parallel connection

**IP67 DRIVER**

| **Cod.** | **0033/IP** 24V 14,4W | **0037/IP** 24V 60W |
|---|---|---|
| **6736** | 1-2 | 1-12 |
| **6737** | 1-2 | 1-12 |

# ZEPPELIN MAXI COB



**6397.33/** 0,40 Kg

**.33** Stainless Steel AISI 316L

| | | | | | | |
|---|---|---|---|---|---|---|
| **/W** | 4000K | /15 | /28 | /60 | LED 8,7W 17,5V 500mA | 1466lm |
| **/WW** | 3000K | /15 | /28 | /60 | LED 8,7W 17,5V 500mA | 1424lm |
| **/XW** | 2700K | /15 | /28 | /60 | LED 8,7W 17,5V 500mA | 1340lm |

F III IP67 30 cm 1000 kg T< 50°C




**6741.33/** 0,40 Kg

**.33** Stainless Steel AISI 316L

| | | | | | | |
|---|---|---|---|---|---|---|
| **/W** | 4000K | /15 | /28 | /60 | LED 8,7W 17,5V 500mA | 1466lm |
| **/WW** | 3000K | /15 | /28 | /60 | LED 8,7W 17,5V 500mA | 1424lm |
| **/XW** | 2700K | /15 | /28 | /60 | LED 8,7W 17,5V 500mA | 1340lm |

F III IP67 30 cm 1000 kg T< 50°C

## ACCESSORIES

Kit
**0230**

Draining junction + IP Connector

Spring
**0260/C**

Spring for plasterboard

## DRIVERS

**ON/OFF**

| **Cod.** | **0147/COB** 500mA |
|---|---|
| **6397** | 1-2 |
| **6741** | 1-2 |

**IP67 DRIVER**

| **Cod.** | **0143/IP** 500mA |
|---|---|
| **6397** | 1 |
| **6741** | 1 |

**DIMMABLE**

| | **0141/DIM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM - DALI |
|---|---|---|---|---|
| **6397** | 1-2 | 1-2 | 1-3 | 1-3 |
| **6741** | 1-2 | 1-2 | 1-3 | 1-3 |

Only serial connection

# ZEPPELIN MINI



**6730.33/** 0,05 Kg

| | | | |
|---|---|---|---|
| **.33** | Stainless Steel AISI 316L | | |
| **/W** | 4000K | LED 1W 350mA | 158lm |
| **/WW** | 3000K | LED 1W 350mA | 150lm |
| **/XW** | 2700K | LED 1W 350mA | 143lm |

F III IP67 30 cm 500 kg T< 40°C




**6731.33/** 0,06 Kg

| | | | |
|---|---|---|---|
| **.33** | Stainless Steel AISI 316L | | |
| **/W** | 4000K | LED 1W 350mA | 158lm |
| **/WW** | 3000K | LED 1W 350mA | 150lm |
| **/XW** | 2700K | LED 1W 350mA | 143lm |

F III IP67 30 cm 500 kg T< 40°C

## ACCESSORIES

Box
**0215**

Plastic box

Spring for plasterboard included

## DRIVERS

**ON/OFF**

| **Cod.** | **0125** 350mA | **0128** 350mA |
|---|---|---|
| **6730** | 1-6 | 1-10 |
| **6731** | 1-6 | 1-10 |

**IP67 DRIVER**

| **Cod.** | **0031/IP** 350mA |
|---|---|
| **6730** | 1-12 |
| **6731** | 1-12 |

**DIMMABLE**

| | **0141/DIMM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM - DALI |
|---|---|---|---|---|
| **6730** | 5-14 | 4-14 | 1-21 | 1-21 |
| **6731** | 5-14 | 4-14 | 1-21 | 1-21 |

Only Serial connection

# ZEPPELIN MINI PLUS



**6732.33/** 0,05 Kg

**.33** Stainless Steel AISI 316L

| | | | | | | |
|---|---|---|---|---|---|---|
| **/W** | 4000K | /11 | /25 | /45 | LED 1W 350mA | 158lm |
| **/WW** | 3000K | /11 | /25 | /45 | LED 1W 350mA | 150lm |
| **/XW** | 2700K | /11 | /25 | /45 | LED 1W 350mA | 143lm |

F III IP67 30 cm 500 kg T< 40°C




**6733.33/** 0,06 Kg

**.33** Stainless Steel AISI 316L

| | | | | | | |
|---|---|---|---|---|---|---|
| **/W** | 4000K | /11 | /25 | /45 | LED 1W 350mA | 158lm |
| **/WW** | 3000K | /11 | /25 | /45 | LED 1W 350mA | 150lm |
| **/XW** | 2700K | /11 | /25 | /45 | LED 1W 350mA | 143lm |

F III IP67 30 cm 500 kg T< 40°C

## ACCESSORIES

Box
**0215**

Plastic box

Spring for plasterboard included

## DRIVERS

**ON/OFF**

| **Cod.** | **0125** 350mA | **0128** 350m |
|---|---|---|
| **6732** | 1-6 | 1-10 |
| **6731** | 1-6 | 1-10 |

**DIMMABLE**

| | **0141/DIM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM - DALI |
|---|---|---|---|---|
| **6732** | 5-14 | 4-14 | 1-21 | 1-21 |
| **6733** | 5-14 | 4-14 | 1-21 | 1-21 |

Only Serial connection

**IP67 DRIVER**

| **Cod.** | **0031/IP** 350mA |
|---|---|
| **6732** | 1-12 |
| **6733** | 1-12 |

# ZEPPELIN ADJUSTABLE



**6411.33/** 0,22 Kg

| | | | | | | |
|---|---|---|---|---|---|---|
| **.33** | Stainless Steel AISI 316L | | | | | |
| **/W** | 4000K | /11 | /25 | /45 | max LED 1,5W 500mA | 221lm |
| **/WW** | 3000K | /11 | /25 | /45 | max LED 1,5W 500mA | 210lm |
| **/XW** | 2700K | /11 | /25 | /45 | max LED 1,5W 500mA | 199lm |

F III IP67 30 cm 1000 kg T< 40°C 73°

ETL version available upon request

## ACCESSORIES

Kit
**0230**

Draining junction + IP Connector

Box
**0232**

Wall Plastic box

Spring
**0238**

Spring for plasterboard

6 cm

## DRIVERS

**ON/OFF**

| **Cod.** | **0125** 350mA | **0128** 350m | **0127** 500mA |
|---|---|---|---|
| **6411** | 1-6 | 1-10 | 1-6 |

**IP67 DRIVER**

| **Cod.** | **0031/IP** 350mA | **0143/IP** 500mA |
|---|---|---|
| **6411** | 1-12 | 1-7 |

**DIMMABLE**

| | **0141/DIM** PUSH - 1...10V | **0141/DALI** DIM DALI | **0145** DIM | **0145/DALI** DIM - DALI |
|---|---|---|---|---|
| **6411** | 2-11 | 2-11 | 1-21 | 1-21 |

Only serial connection

**OUT**DOOR

# JAZZ

Design FEB Rienzi

# JAZZ

IP65 diffused light outdoor lamp for ceiling or wall installation with anodised aluminium body and reflector, satin methacrylate diffuser and latest generation 3000K LED module at 220/240V mains voltage. The simple line gives it an appearance that is well suited to any type of environment, from classic to modern, and to any type of context, from residential to tourist accommodation.

*Lampada da esterno IP65 a luce diffusa per installazione a plafone o a parete con corpo e riflettore in alluminio anodizzato, diffusore in metacrilato satinato e modulo LED di ultima generazione a 3000K a tensione di rete 220/240V. La linea semplice le conferisce un aspetto che bene si adatta a qualsiasi tipo di ambiente, da quelli classici a quelli moderni e a qualsiasi tipo di contesto, dal residenziale a quello ricettivo turistico.*

*IP65-Außenleuchte mit diffusem Licht für die Decken- oder Wandmontage mit Gehäuse und Reflektor aus eloxiertem Aluminium, Diffusor aus satiniertem Methacrylat und LED-Modul der neuesten Generation mit 3000 K bei 220/240 V Netzspannung. Die schlichte Linie verleiht ihr ein Erscheinungsbild, das sich für jede Art von Umgebung eignet, von klassisch bis modern, und für jede Art von Kontext, vom Wohnbereich bis zur Touristenunterkunft.*

# JAZZ



**5538** 0,60 Kg

| | | |
|---|---|---|
| **.01** | White | |
| **.02** | Black | |
| **.38** | Shiny Copper | |

| | | | |
|---|---|---|---|
| **/WW** | 3000K | LED 8,7W | 670lm |

F IP65

## FINISHES CODES

**.01** White **.02** Black **.38** Shiny Copper

OUTDOOR
ROC
Design FEB Rienzi

# ROC

IP65 outdoor lamp for wall or ceiling installation with latest generation 3000K 670lm LED module at 220/240V mains voltage.

Die-cast aluminium structure with thick anodising treatment and matt white polyester paint finish. The outer diffuser is in moulded, ground, transparent glass, the inner one in satin-finish methacrylate. Stainless steel screws and silicone seals.

Roc is designed for lighting outdoor spaces, porches, terraces and all open architectural environments exposed to the weather. The essential line and the quality of the materials also make it suitable for indoor environments such as bathrooms and rooms where an IP44 or higher degree of protection is required.

The mains-voltage powered LED light source, protected by an opal screen, provides all the high efficiency and energy-saving advantages of the technology, while at the same time guaranteeing diffuse and pleasant direct light.

The luminaire is supplied with an additional seal that forms a barrier to insect penetration between the glass and the inner body.

*Lampada da esterno IP65 per installazione a parete o plafone con modulo LED di ultima generazione 3000K da 670lm a tensione di rete 220/240V.*

*Struttura in alluminio pressofuso con trattamento di anodizzazione in spessore e verniciatura in poliestere bianco opaco. Il diffusore esterno è in vetro trasparente stampato, molato e sfiaccolato, quello interno in metacrilato satinato. Viti in acciaio INOX e guarnizioni di tenuta siliconiche.*

*Roc è pensata per l'illuminazione di spazi esterni, porticati, terrazze e tutti gli ambienti architettonici aperti, esposti agli agenti atmosferici. La linea essenziale e la qualità dei materiali la rendono adatta anche per ambienti interni come bagni e locali dove è richiesto un grado di protezione IP44 o superiore.*

*La sorgente luminosa LED alimentata a tensione di rete, protetta da uno schermo opalino, permette di avere tutti i vantaggi di alta efficienza e risparmio energetico della tecnologia e al tempo stesso garantisce una luce diretta diffusa e gradevole.*

*La lampada è fornita con una guarnizione supplementare che costituisce una barriera per la penetrazione di insetti tra vetro e corpo interno..*

*IP65-Außenleuchte für Wand- oder Deckenmontage mit LED-Modul der neuesten Generation mit 3000K und 670lm bei 220/240V Netzspannung.*

*Struktur aus druckgegossenem Aluminium mit starker Eloxierung und mattweißer Polyesterlackierung. Der äußere Diffusor besteht aus geschliffenem, transparentem Glas, der innere aus satiniertem Methacrylat. Schrauben aus rostfreiem Stahl und Silikondichtungen.*

*Roc ist für die Beleuchtung von Außenbereichen, Veranden, Terrassen und allen offenen architektonischen Umgebungen, die dem Wetter ausgesetzt sind, konzipiert. Aufgrund ihrer klaren Linie und der Qualität der Materialien eignet sie sich auch für Innenräume wie Bäder und Zimmer, in denen ein Schutzgrad von IP44 oder höher erforderlich ist.*

*Die netzgespeiste LED-Lichtquelle, die durch eine opale Abschirmung geschützt ist, bietet alle Vorteile dieser Technologie in Bezug auf Effizienz und Energieeinsparung, während sie gleichzeitig ein diffuses und angenehmes direktes Licht garantiert.*

*Die Leuchte wird mit einer zusätzlichen Dichtung geliefert, die eine Barriere gegen das Eindringen von Insekten zwischen dem Glas und dem Innenkörper bildet.*

# ROC




**5539** 1,50 Kg

**.01** White

**/WW** 3000K LED 8,7W 670lm

F IP65

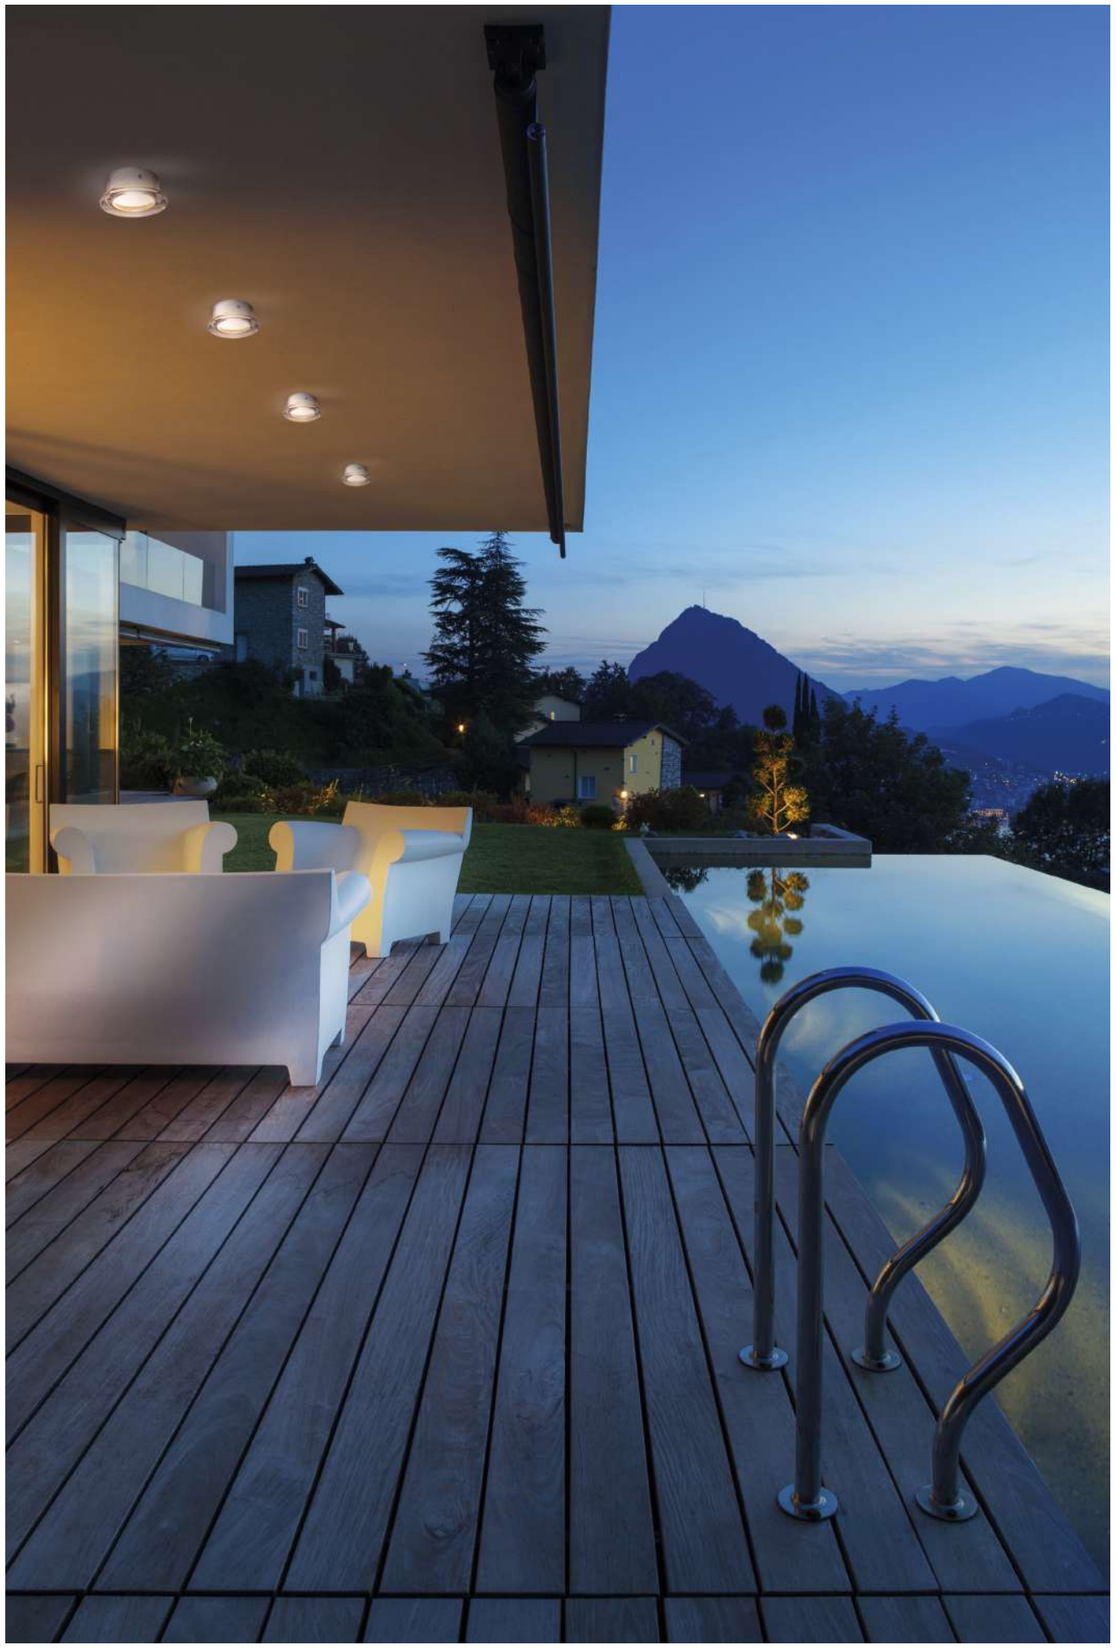

## FINISHES CODES



**.01** White

**OUT**DOOR

# DRUM

Design UT Egoluce

# DRUM

IP65 ceiling or wall lamp with an anodised aluminium structure and reinforced outdoor finish, methacrylate diffuser and 10W 220-240V LED module.

The simple line gives it an appearance that is well suited to any type of environment, from classic to modern interiors and any type of context, from residential to tourist accommodation.

*Lampada da plafone o parete IP65 con struttura in alluminio anodizzato e finitura rinforzata per esterno, diffusore in metacrilato e modulo LED 10W 220-240V.*

*La linea semplice le conferisce un aspetto che bene si adatta a qualsiasi tipo di ambiente, dagli interni classici a quelli moderni e a qualsiasi tipo di contesto, dal residenziale a quello ricettivo turistico.*

*Decken- oder Wandleuchte IP65 mit Struktur aus eloxiertem Aluminium und verstärkter Oberfläche für den Außenbereich, Diffusor aus Methacrylat und LED-Modul 10W 220-240V.*

*Die schlichte Linie verleiht ihr ein Erscheinungsbild, das sich für jede Art von Umgebung eignet, von klassischen bis zu modernen Innenräumen und jeder Art von Kontext, von Wohn- bis zu Touristenunterkünften.*

# DRUM




**5520** 1,30 Kg

| | | |
|---|---|---|
| **.01** | White | |
| **.45** | Anodized aluminium | |

| | | | |
|---|---|---|---|
| **/WW** | 3000K | LED 8,7W | 670lm |

F IP65

## FINISHES CODES



**.01** White

**.45** Anodized aluminium

Our fittings are manufactured in conformity with the european standard CEI-EN 60598 and, consequently, get the mark CE.

*Nos appareils sont fabriqués en conformité aux règles européennes CEI-EN 60598 et, par conséquence, fournis avec marque CE.*

*Unsere Produkte werden gemäss europäischer Norm CEI-EN 60598 hergestellt und sind als solche mit dem CE-Zeichen gekennzeichnet.*

Egoluce s.r.l. reserves the right to change, at any time and without prior warning, the technical specification of any product illustrated in this catalogue.
Colours are simply indicative of the real nuance.

*Egoluce s.r.l. se réserve le droit de modifier, à n'importe quel moment et sans préavis, les caractéristiqués técniques des éléments illustrés dans ce catalogue.*
*Les couleurs sont simplement a titre indicatif.*

*Egoluce s.r.l. behält sich vor, jederzeit und fristlos die in beiliegendem Katalog erläuteren technischen Daten zu ändern.*
*Die Farben sind nicht genau wirklichkeitsgetreu.*

**EDITION**
2024 © All rights reserved

**PHOTOS**
Bordegoni S.r.l.
U.T. Egoluce

*Proudly Distributed by*

IM DESIGN CONCEPTS

**For US Distribution, please contact IM Design Concepts**
imdesignconcepts.com | info@imdesignconcepts.com | (813) 284-7435

MADE IN ITALY

**EGOLUCE s.r.l.**
Via I. Newton, 12 - 20016 Pero - Milano - Italy