

MAGIC CLOUD

CUSTOM UNIFORM LIGHTING **PANELS**

BACKLIGHT
Designed and Made in Italy

One fusion of Technique and Design for one perfect lighting.

Designed and produced in Italy since 1998 and exported to more than 100 countries worldwide.

Index

04-05 |What is Magic Cloud

06-07 |Technical specs and sizes

08-11 |Ceiling mounting - Fastmount

12-17 |Ceiling mounting - Screws

18-19 |Ceiling mounting - Frame by others

20-23 |Suspended - Steel cords

24-27 |Wall mounting - Fastmount

28-33 |Wall mounting - Screws

34-35 |Floor mounting

36-37 |Up light - On millwork

38 |Printed textures

39 |Possible extra works

40-55 |Gallery



MAGIC CLOUD

The architecture of light.

MAGIC CLOUD is a customizable, made-to-measure and made-to-order illuminated panel with uniform lighting emission, even in irregular shapes, and customizable mounting systems to suit the needs of the project.


















Thanks to its cutting-edge technology, MAGIC CLOUD guarantees uniform lighting in a very low thickness, creating a magical and welcoming atmosphere.

It is ideal for the architectural and design sector, as it allows for the creation of suggestive and original environments, but also for the Lighting sector as it offers noteworthy illuminotechnical properties.


Primarily used to create illuminated surfaces such as floors, ceilings or walls, MAGIC CLOUD is also the best solution for backlighting other translucent materials such as stones, resins, perforated metals, decorative glasses, and many others.

It is also possible to print any high-resolution image on the surface of the illuminated panel.

Technical Specs

COLOR TEMPERATURE	<div>  2000 K  2700 K  3000 K  3500 K  4100 K  5000k </div> <div>  Tun. White 1800-3200K  Tun. White 2400-4100K  Custom range Tun. White*  RGB  RGBW*  RGBTW*  DIM to WARM* </div> <p>*Under request for a minimum order quantity to be define.</p>							
CRI	> 95							
INPUT VOLTAGE	24VDC							
DRIVER	AC DC 24V DC OUTPUT (class 2 Power Unit)							
DIMMABILITY	by all existing systems (ELV/MLV, 0-10V, DALI, LUTRON,DMX...)							
POWER CONSUMPTION	Standard output 14 W per linear mt (4,5 W per linear FT) High output 28 W per linear mt (9 W per linear FT)							
LUMEN DELIVERED	Standard output 980 lm per linear mt (315 lm per linear FT) High output 1960 lm per linear mt (630 lm per linear FT) of the longer side							
IP GRADE	IP40 for Dry Location (IP54 for Damp Location under request)							
DIMENSIONS	<div> WIDTH MM widht 203.2 to 2006.6 mm INCHES widht 8.0 to 79.0 in MM widht 203.2 to 3048.0 mm </div> <div> LENGTH INCHES widht 8.0 to 120.0 in </div>							
WEIGHT	5.7 lbs/sq. FT (25 kg/sq. mt)							
LIFE TIME	70.000 hrs							
WARRANTY	3 Years (36 month)							
CERTIFICATIONS	   							

Sizes

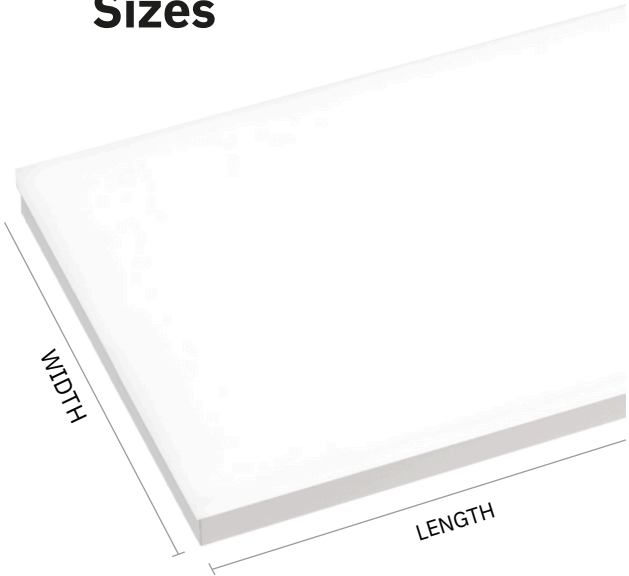

WIDTH	LENGTH (height)
CUSTOM	CUSTOM
MIN - 203.2 mm (8")	MIN - 203.2 mm (8")
MAX - 2006.6 mm (79")	MAX - 3048 mm (120")


Maximum measurements depend on the scope of work and you will find them on the following dedicated pages.




Ceiling mounting Fastmount

Section | Ceiling mounting - Fastmount | Max WIDTH 304,8 mm (12 in) Max LENGTH 3048 mm (120 in)

SURFACE MOUNTING FASTMOUNT

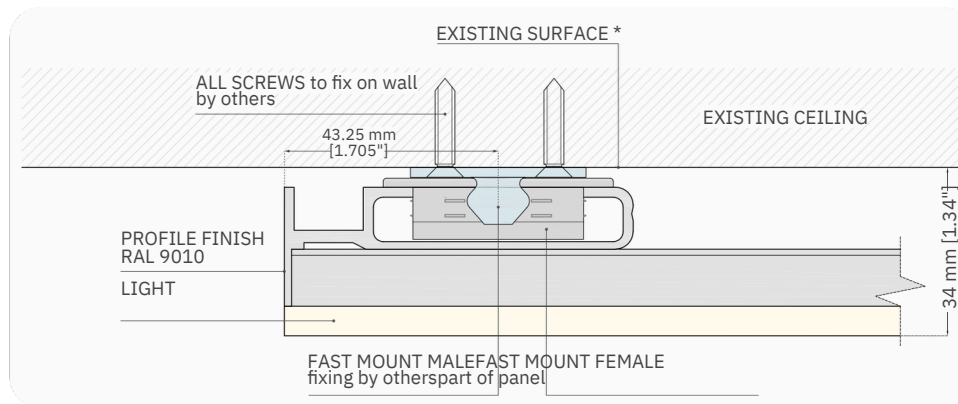


RECESSED MOUNTING FASTMOUNT

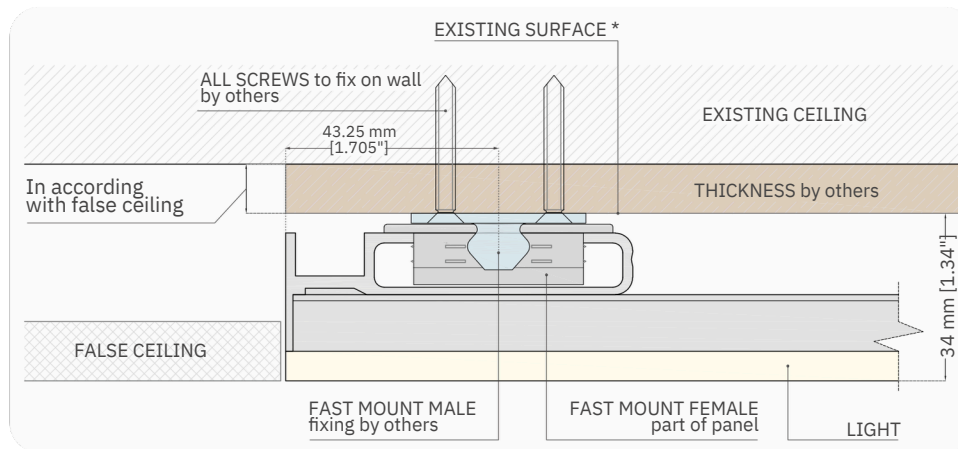

* The EXISTING SURFACE must be flat. | uniform lighting custom size


Installation manual | Ceiling mounting - Fastmount

1

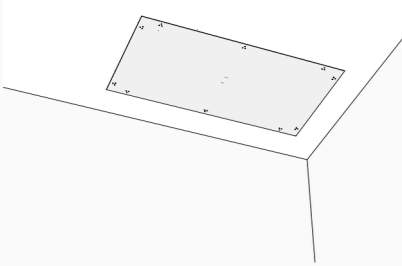


Position the template (supplied). It is recommended to be in more than one person. (The template has exactly the same size of the light panel).

2

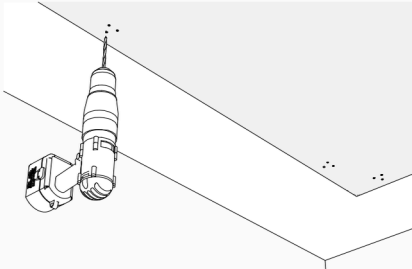

Drill trough all the holes you will find on the template. These holes will be needed for fischers (not included).


3

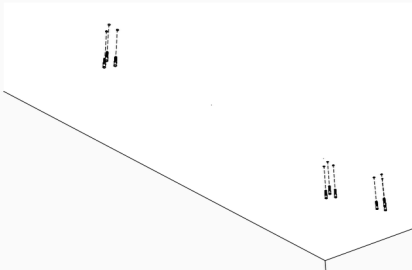

Remove the template and insert all fischers according to the type of surface (not included).


Installation manual | Ceiling mounting - Fastmount

4

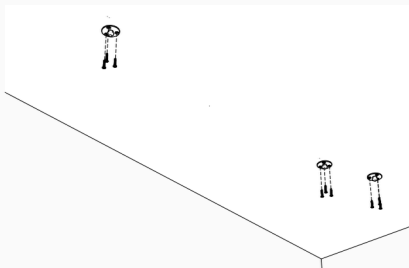


Screw all clips supplied using countersunk screws. The screws are not included, make sure that will be perfectly flush with the clips, otherwise, if deeper, the system will not work properly.

5

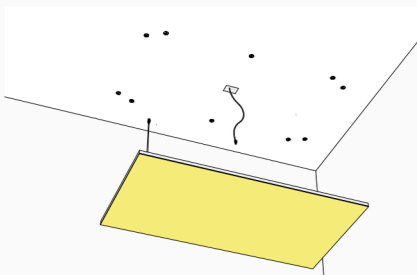

Once the cable coming from the remote 24VDC driver is connected, lift the panel avoiding any bending or deforming, match the clips and push. Note: check that all clips are working properly.

6

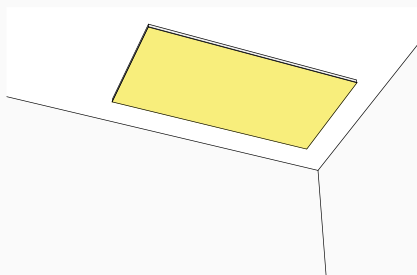


ENJOY




Ceiling mounting Screws

Section | Ceiling mounting - Screws | Max WIDTH 914,4 mm (36 in) Max LENGTH 3048 mm (120 in)

SURFACE MOUNTING SCREWS

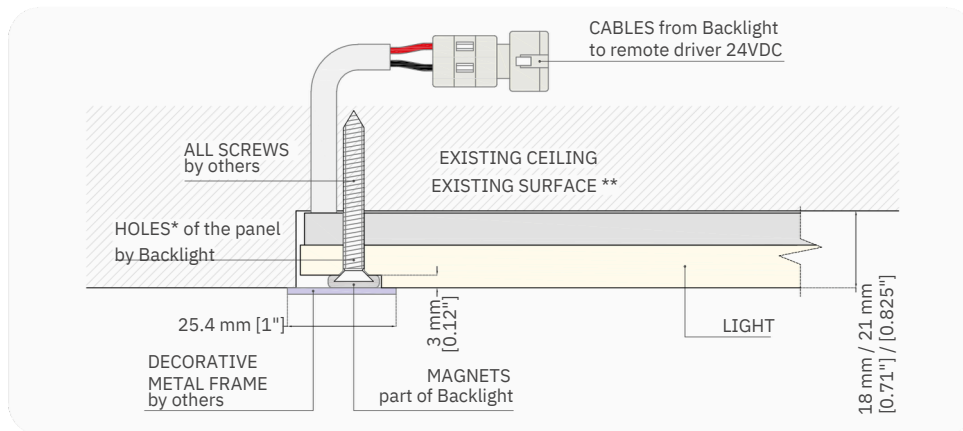

RECESSED MOUNTING SCREWS

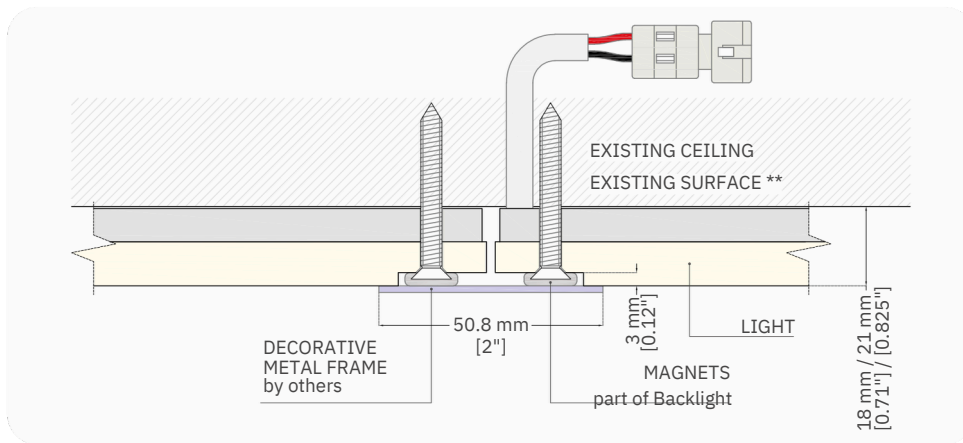


* Number of HOLES depends on the size and weight.

** The EXISTING SURFACE must be flat.


Installation manual | Ceiling mounting - Screws

1

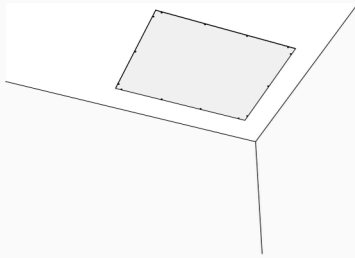

Position the template (supplied).
(The template has the same overall size of the light panel).

2

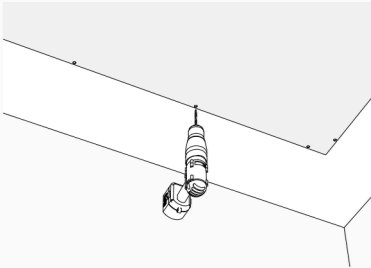

Make all the holes (keep the template still;
if needed you can screw it).


3



Remove the template.


Installation manual | Ceiling mounting - Screws

4

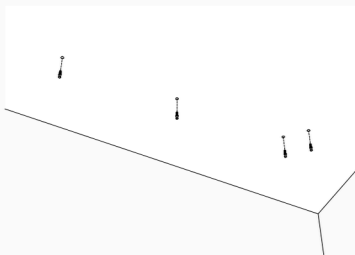


Once the template is removed, Insert the fischers (not supplied) it is important to use all the holes.

5

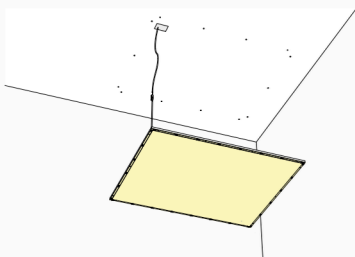

Connect the cable coming from the remote 24VDC driver.


6

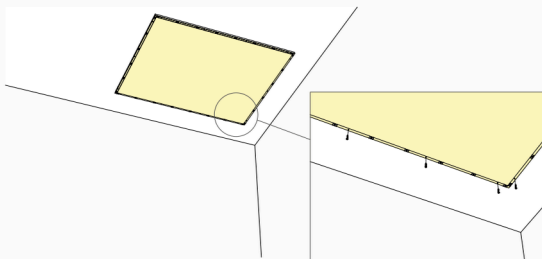


Fix the panel and screw (screws not supplied).
Make sure that the cups of screws are not deeper than 3mm.

Installation manual | Ceiling mounting - Screw

- 7** Position the iron frame magnetically (supplied).
If need, you can create a decorative frame
to glue on the iron frame.

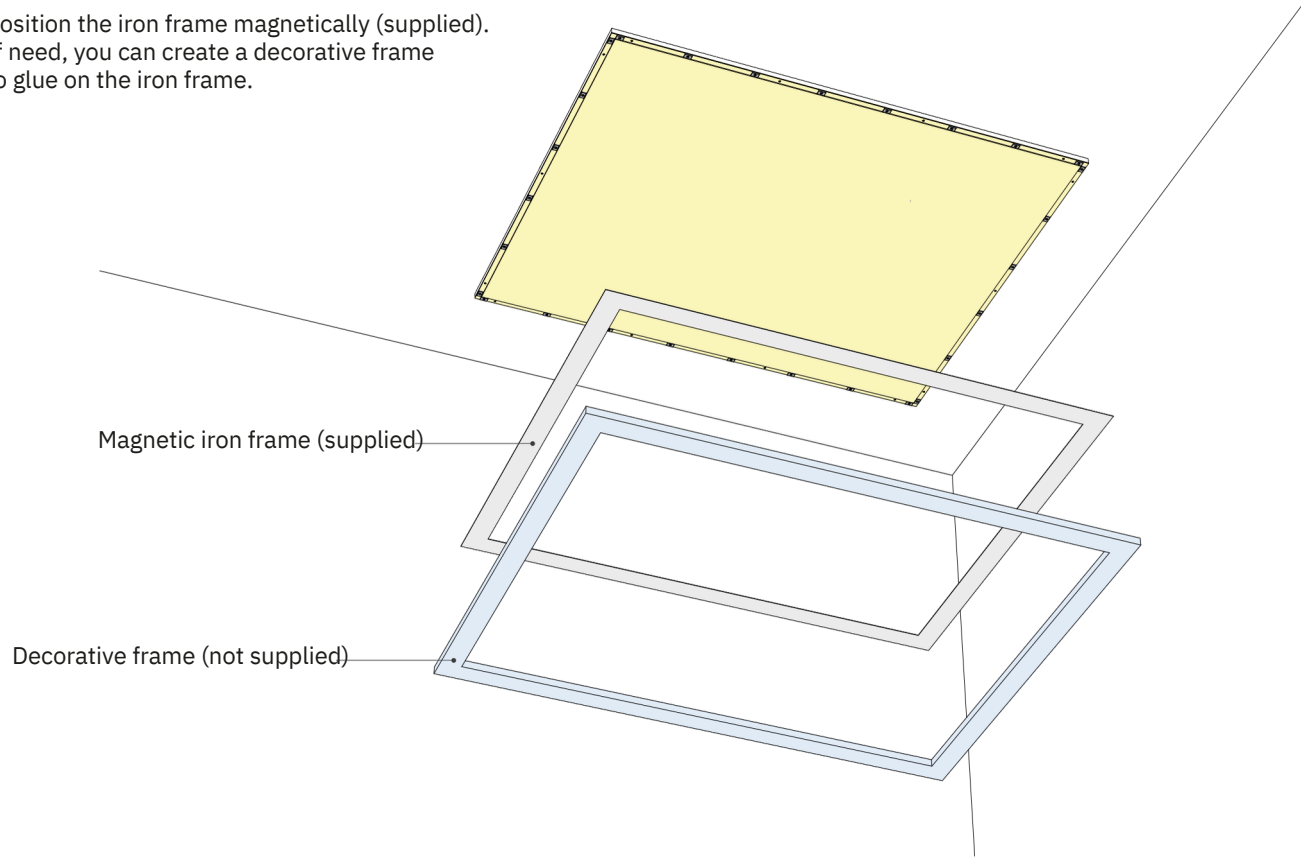

Installation manual | Ceiling mounting - Screw

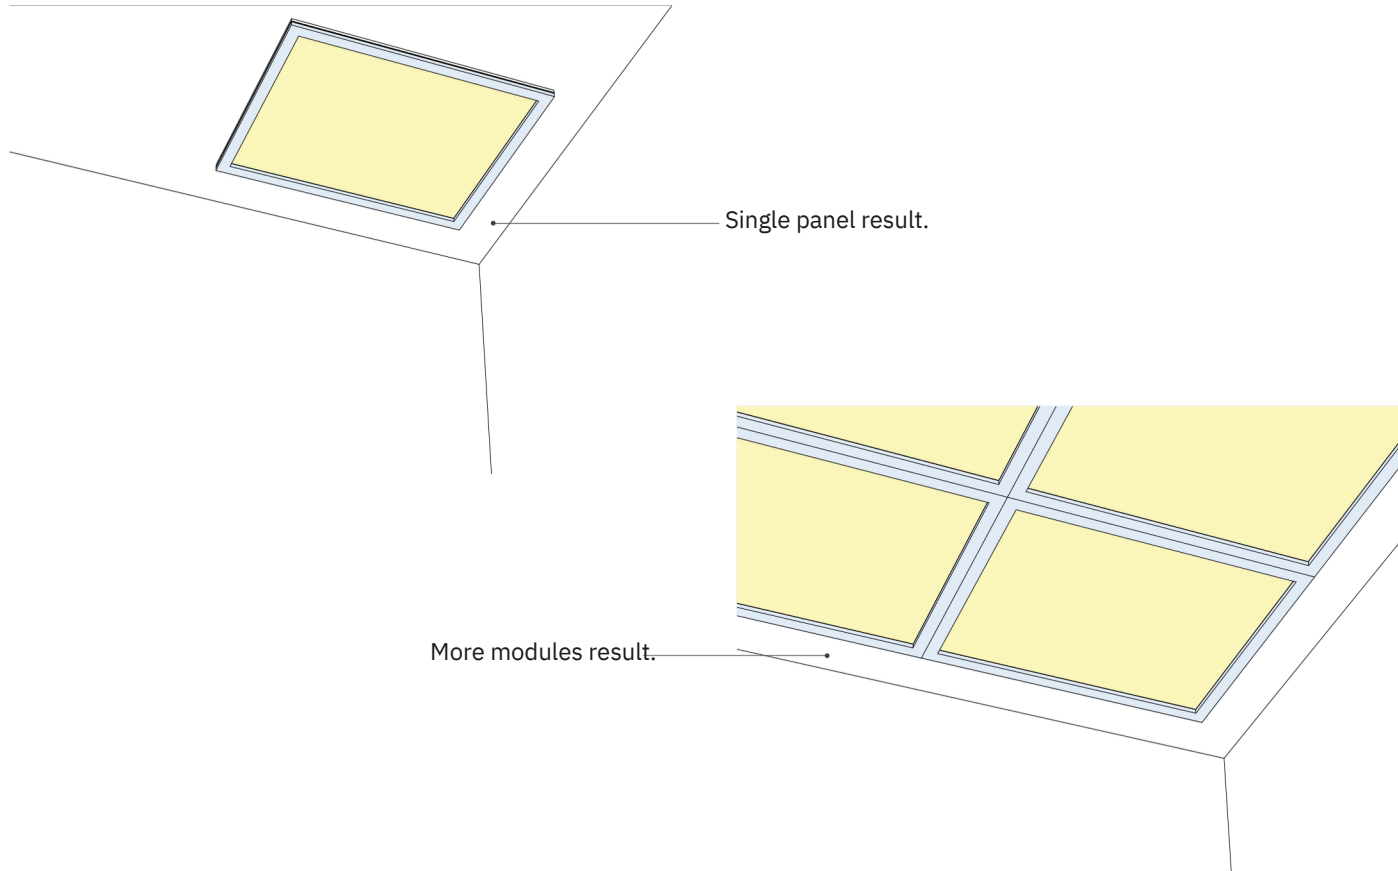




Ceiling mounting Frame by others

Section | Ceiling mounting - Frame by others

Max WIDTH 1371,6 mm (54 in)
Max LENGTH 3048 mm (120 in)

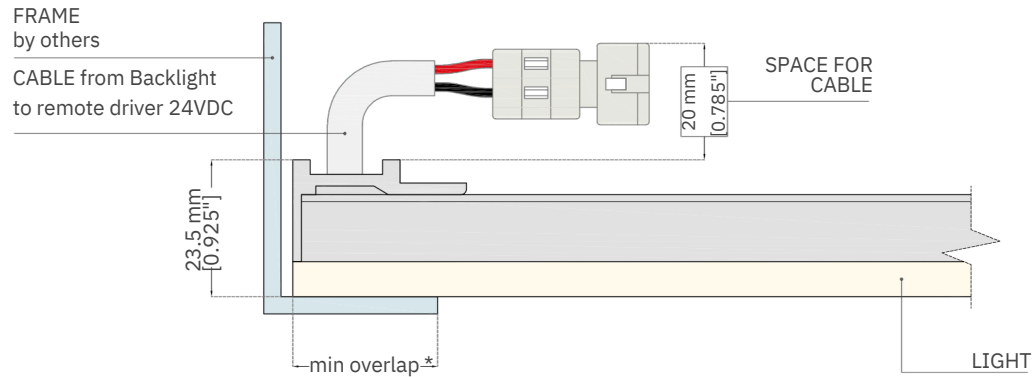


FRAME OVERLAP *	
PANEL WIDTH (short side)	OVERLAP
until 609.6 mm (24")	12.7 mm (0.5")
from 609.6 (24") to 1219.2 mm (48")	25.4 mm (1")
from 1219.2 (48") to 1371.6 mm (54")	50.8 mm (2")



Suspended
by steel cords


Section | Steel cords - Shy plus | Max WIDTH 914,4 mm (36 in) Max LENGTH 3048 mm (120 in)

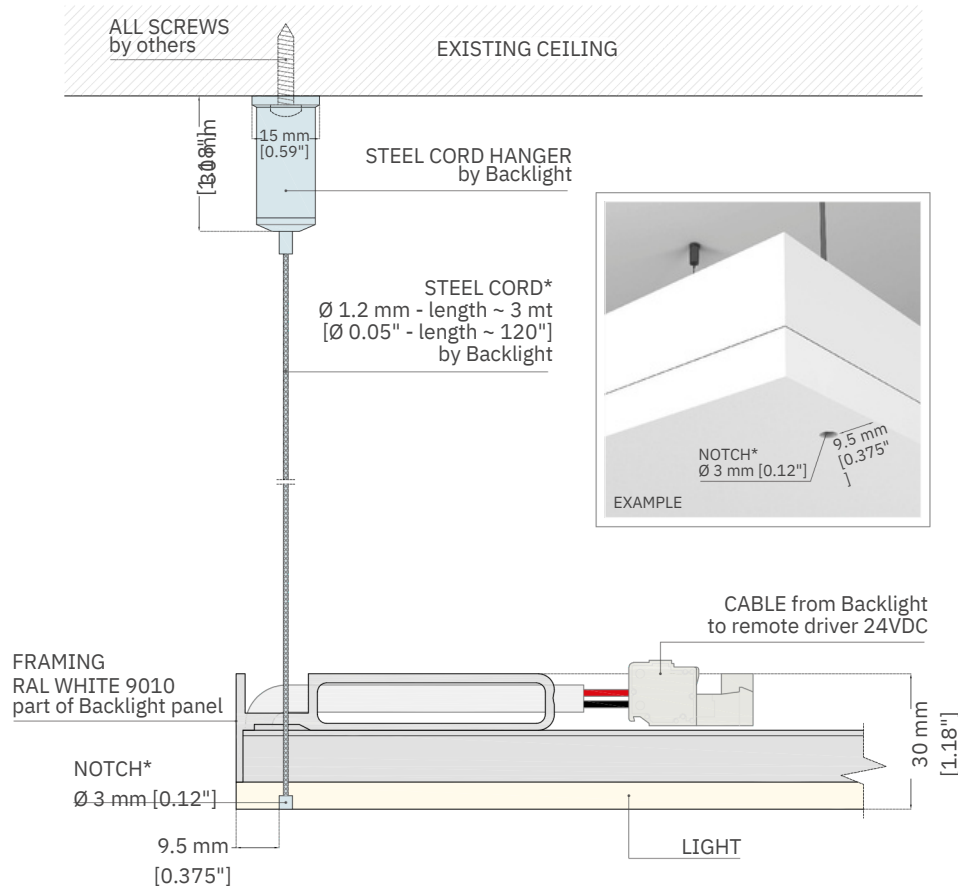

* Number of HOLES depends on the size and weight.


Installation manual | Steel cords - Shy plus

1

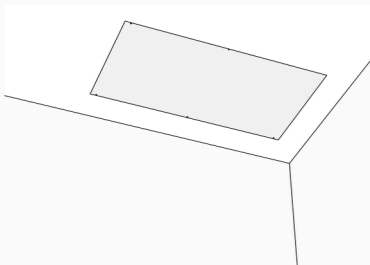


Position the template (supplied).
Note: The template has the same size of the lighting panel.

2

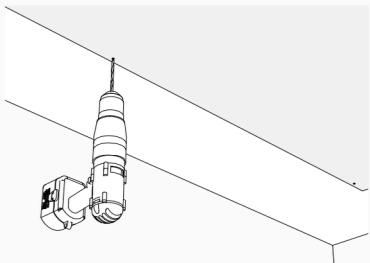

Make all the holes for the fishers.
(Fishers are not supplied, use the right model according to the type of surface).


3

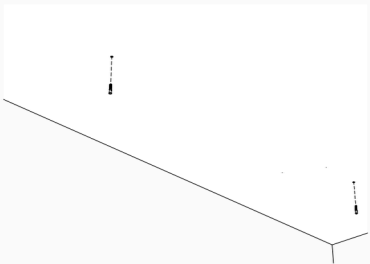

Once the template is removed insert all fishers.


Installation manual | Steel cords - Shy plus

4

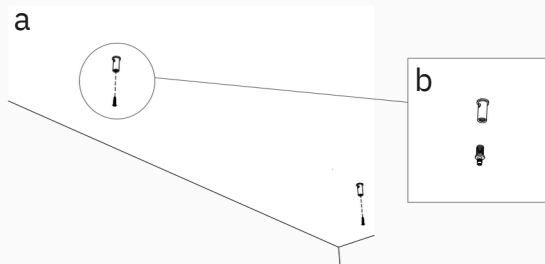


Position and screw the hangers.
(Hangers are supplied, screws are not supplied)

5

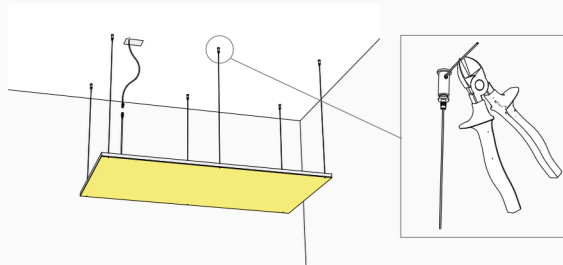

Liŕ the panel, insert the steel cords on the hangers and connect the cable coming from the remote 24 VDC driver. Once the panel is leveled cut the excess steel cord.

6

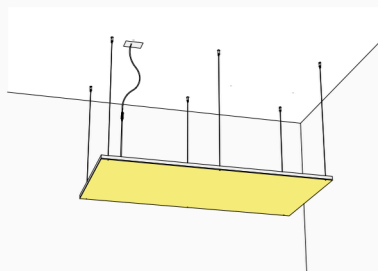


ENJOY




**Wall
mounting**
Fastmount

Section | Wall mounting - Fastmount | Max WIDTH 2006,6 mm (79 in) Max LENGTH 3048 mm (120 in)

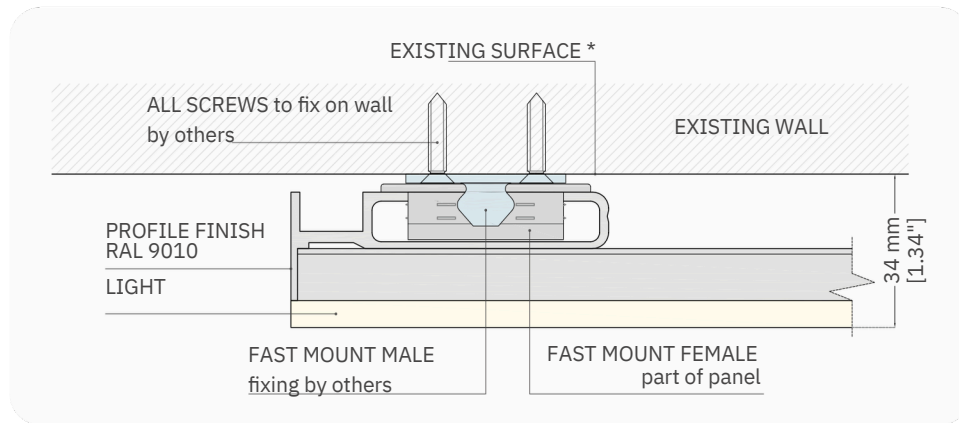

**SURFACE MOUNTING
FASTMOUNT**


**RECESSED MOUNTING
SCREW**

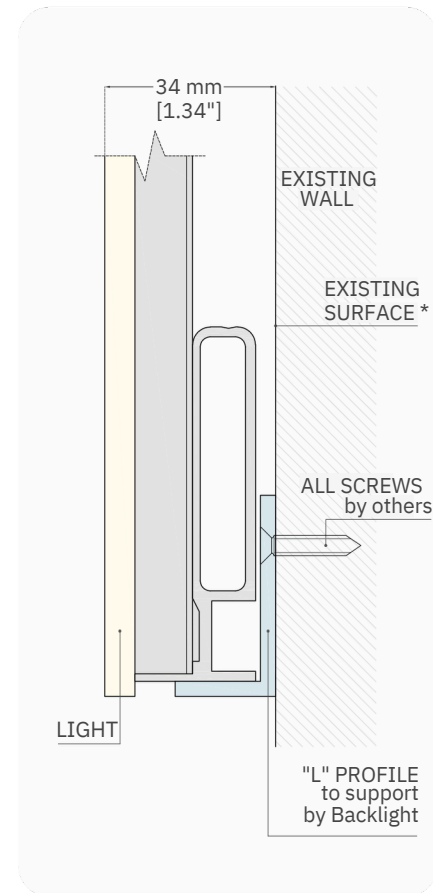

** The EXISTING SURFACE must be flat.


Installation manual | Wall mounting - Fastmount

1

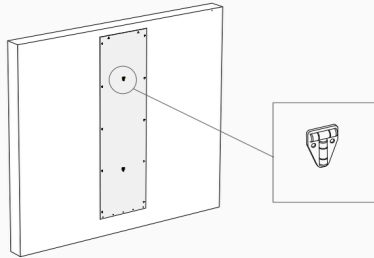


Position the template (supplied) help with the integrated level. The template has exactly the same size of the light panel.
It is suggested to screw the template on wall once have found the right position.

2



Drill trough all the holes you will find on the template.
These holes will be needed for fischers (not included).


3



Remove the template and insert all fischers according to the type of wall (not included).


Installation manual | Wall mounting - Fastmount

4




Fix the clips and the "L" profile supplied using countersunk screws (not supplied).
Note: the screws must be perfectly flush with clips and "L", otherwise, if deeper, the system will not work properly.

5



Once the cable coming from the remote 24VDC driver is connected, sit the panel on the "L" profile and push.
Note: check that all clips are working properly.

6




ENJOY




Wall mounting Screws

Section | Wall mounting - Screws | Max WIDTH 1219,2 mm (48 in) Max LENGTH 3048 mm (120 in)

SURFACE MOUNTING SCREWS

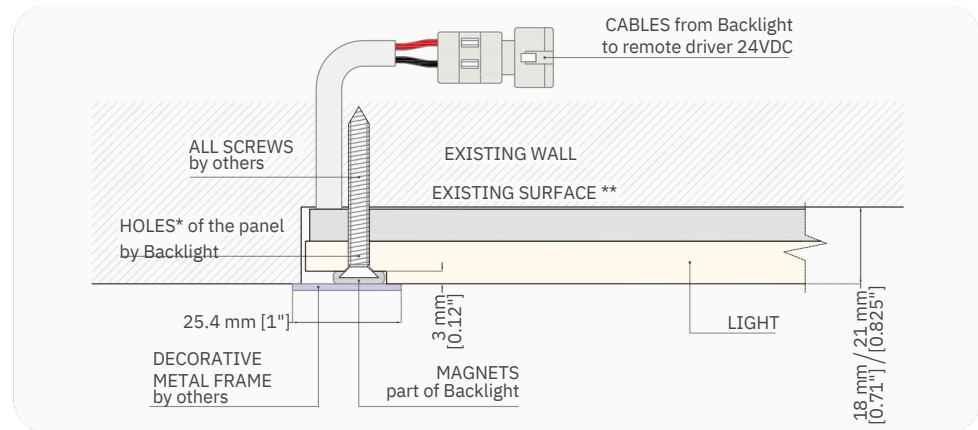

RECESSED MOUNTING SCREWS

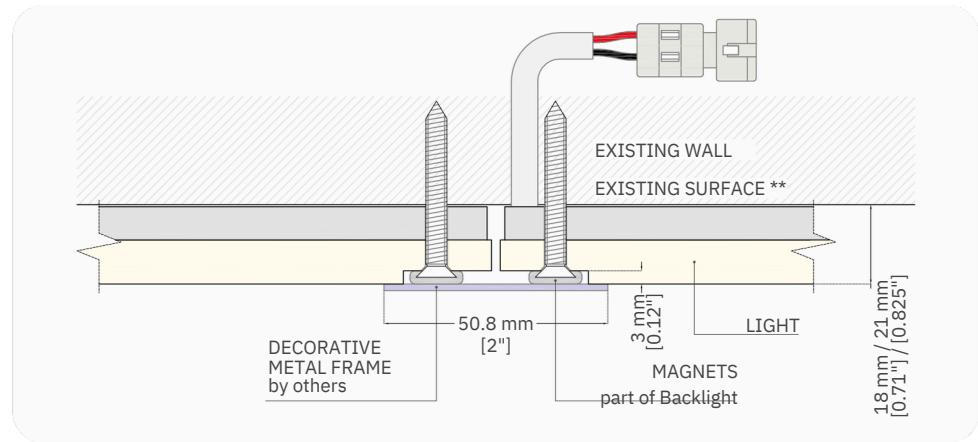


* Number of HOLES depends on the size and weight.

** The EXISTING SURFACE must be flat.


Installation manual | Wall mounting - Screws

1

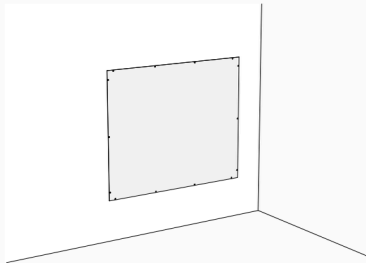


Position the template (supplied) on your wall.
Note: The template has the same size of the light panel.

2



Make all the holes for fischers (fischers are not supplied).


3

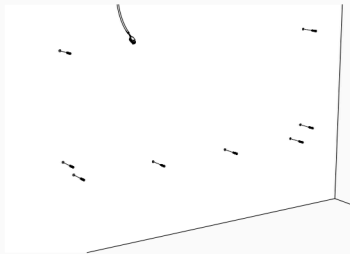

Insert all fischers.

Installation manual | Wall mounting - Screws

4

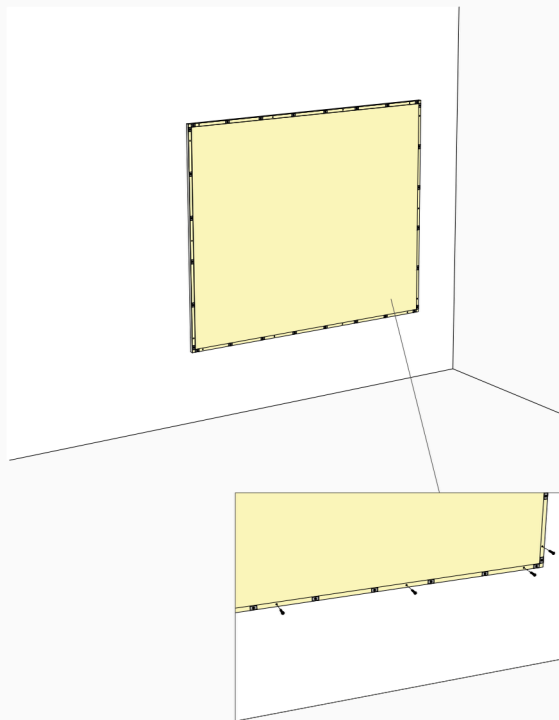

Remove the template, connect the cable coming from the remote 24 VDC driving and screw the light panel.


Notes:

- screw are not supplied.
- screw cups cannot be deeper then 3 mm



Installation manual | Wall mounting - Screw

5

Position the iron frame magnetically (supplied).
It is attached magnetically; pay attention to your
fingers as magnets are very strong.
If need, you can create a decorative frame
to glue on the iron frame.

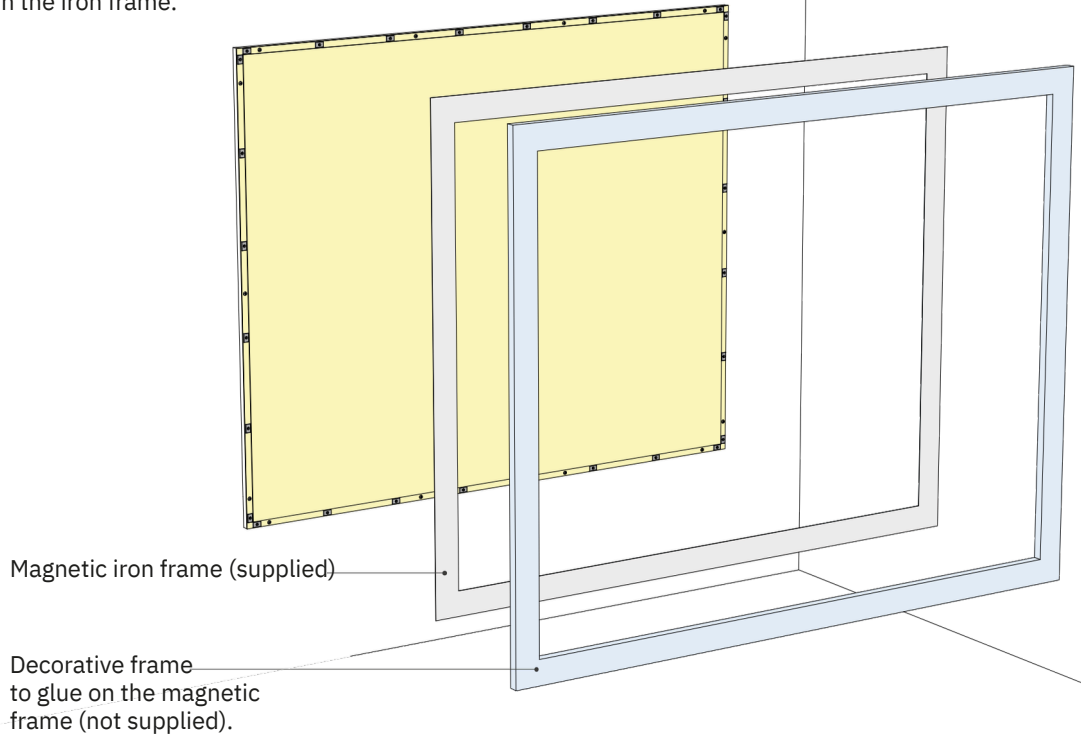


Installation manual | Wall mounting - Screw

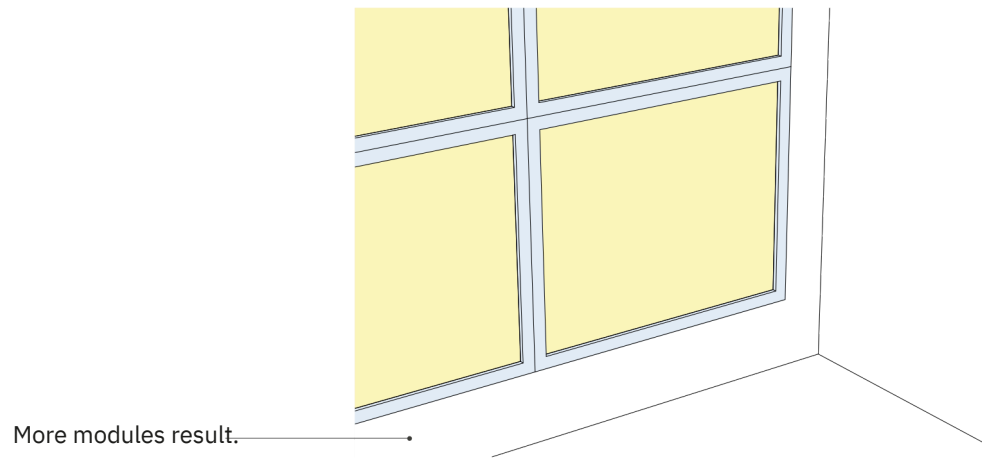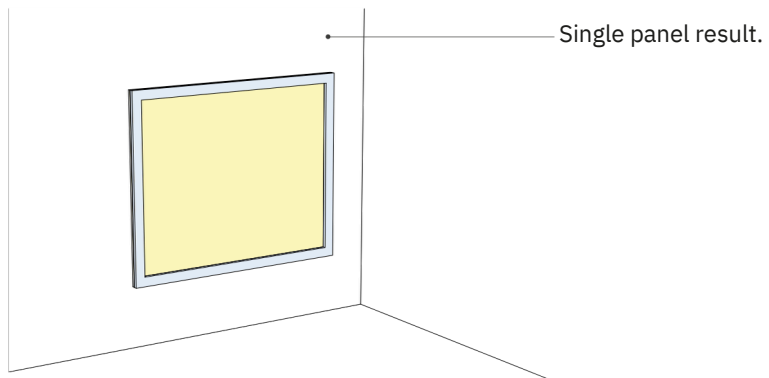



**Floor
mounting**

Section | Floor Mounting | Max WIDTH 2006,6 mm (79 in) Max LENGTH 3048 mm (120 in)

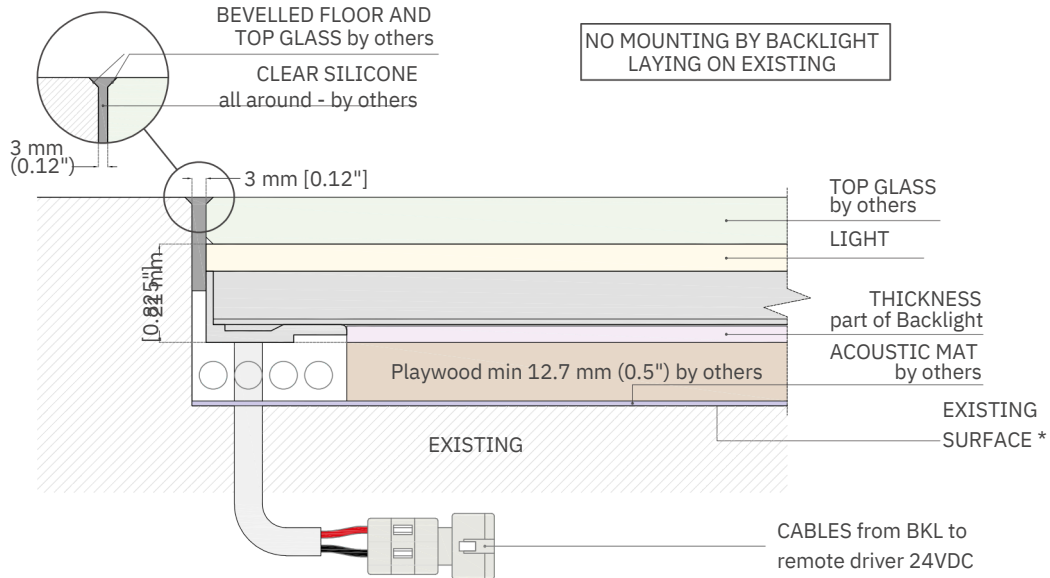


* The EXISTING SURFACE must be flat.



Up light
On Millwork


Section | Up light on millwork | Max WIDTH 2006,6 mm (79 in) Max LENGTH 3048 mm (120 in)

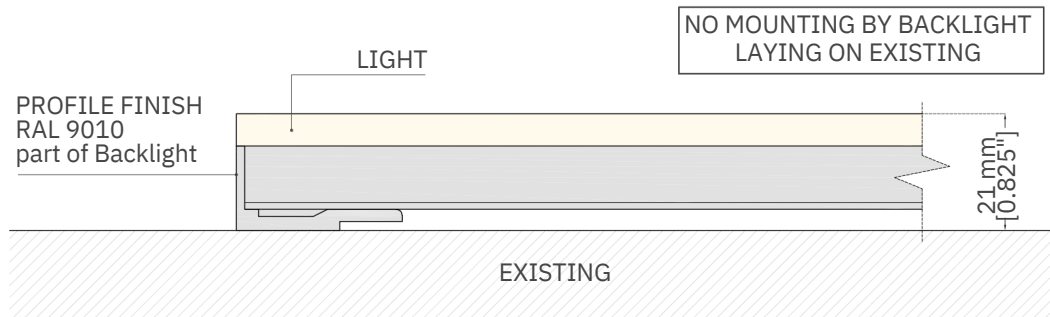

Standard textures



WHITE ONYX

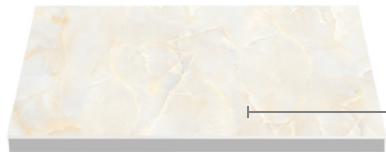

WHITE ONYX 1



WHITE ONYX 2



WHITE ONYX 3




LIGHT BLUE ONYX




GREEN ONYX



PINK ONYX

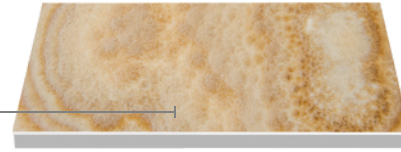

HONEY ONYX

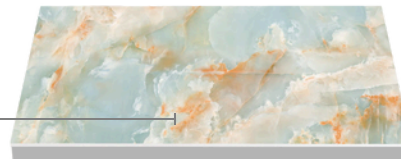

FANTASY



PARCHMENT




RICE PAPER




Your high resolution file

Possible extra works

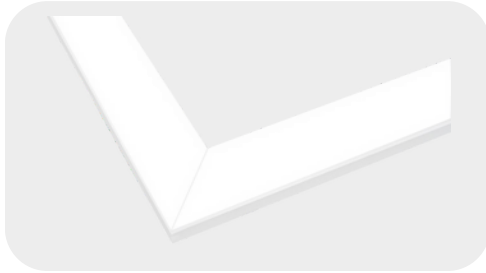

MITERED END 2D

The ends of each lamp can be customized to obtain different geometric figures with a 2D effect.

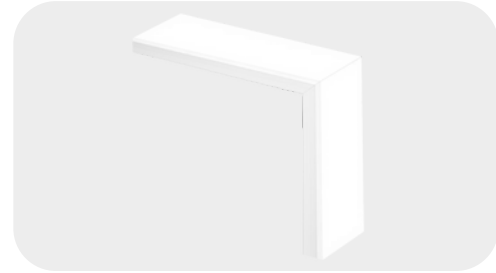


MITERED END 3D

The ends of each lamp can be customized to obtain different geometric figures with a 3D effect.



RUN

More fixtures can be combined to obtain longer runs since the visibility of the seam is clean.

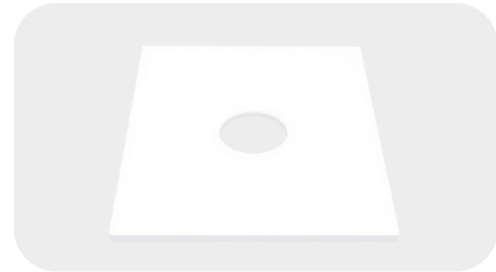


HOLES ON SURFACE UNDER DRAWING










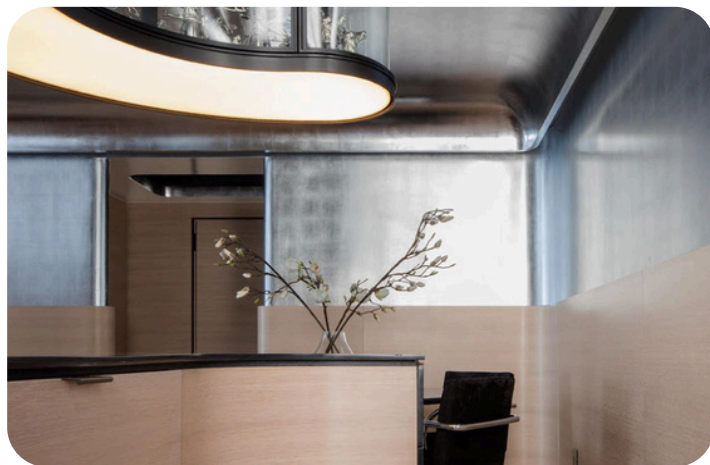


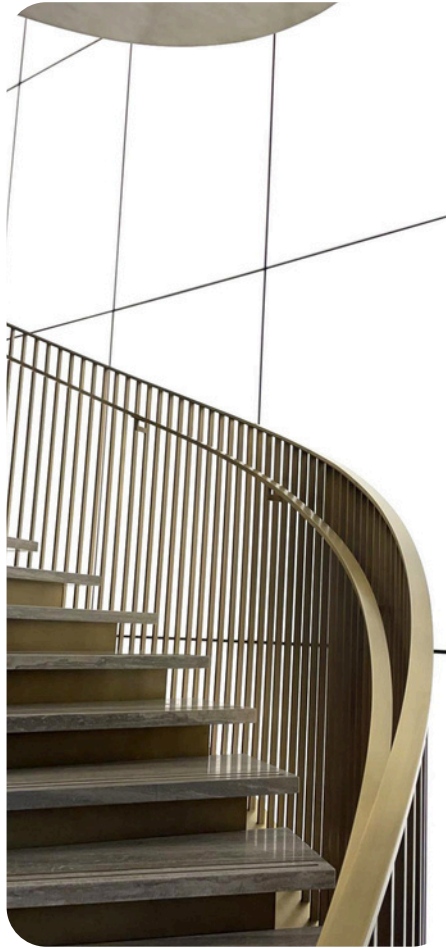







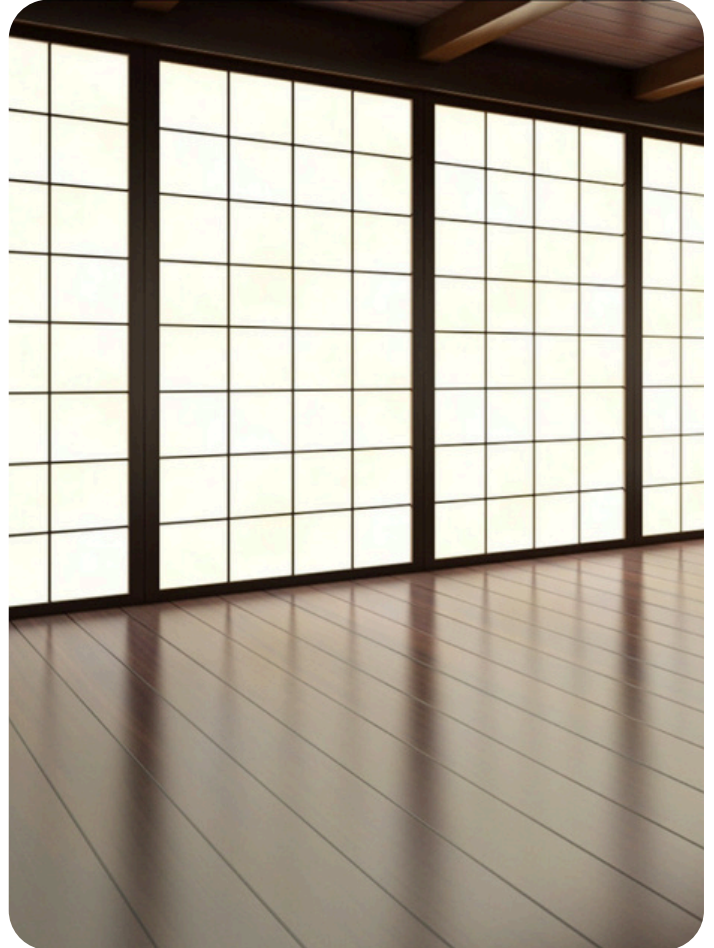













***Discover all our most famous products
that have made and still make lighting history.***

MAGIC CLOUD Custom Uniform Lighting Panels

FLUSH Custom Uniform Lighting Bars

HALO Custom uniform Lighting Frames in a single piece

HIDE Line of Uniform Lighting Circles

PILL Plasterboard built-in Square and Round Lights

WETTY WET / IP67 Line

CHIARO Lighting Integration for ARMSTRONG CEILINGS

STAMP Creative light on plasterboard



www.backlightsrl.com

BACKLIGHT

Via Alessandro Volta, 5
20876 Ornago (MB)
Italy

+39 039 6010396

www.backlightsrl.com

info@backlightsrl.com

f @ in ▶ | BACKLIGHTSRL