

NODDLE

Orbit is proud to introduce a new interpretation of the surface mounted spot light or monopoint. The iF Design Award winning Noddle features a semi-recessed housing with a trimless finish (for sheetrock and plaster ceilings) and patented magnetic rotation system.

The Noddle features a pure geometric form with clearly defined lines and perfect balance. The discreet magnetic connection points allow the luminaire a full range of motion and orientation.

The Noddle is also available as a track mounted option. Please see the Noddle Track family spec sheet for more information.



Ordering Code

NODD-FO98- _____ - _____ - _____ / _____ - _____ - _____
(A) (B) (C) / (D) (E) (F)

Part Family	
NODD-FO98 - Orbit Noddle	
LED Color Temperature (A)	
927 - 2700K (90+ CRI)	930 - 3000K (90+ CRI)
935 - 3500K (90+CRI)	940 - 4000K (90+CRI)
DW - Dim to warm (2200K - 3000K)	
consult factory for COB specials for retail or food display	

Light Distribution (B)	
SP - Spot (24°)	FL - Flood (40°)
Outer Finish Color (C)	
WH - White	BL - Black
Inner Finish Color (D)	
WH - White	BL - Black
DKC - Dark Chrome (Black Mirror Finish)	CU - Satinated Red Copper

Dimming (E)
D1 - TRIAC phase dim (120V)
D2 - 0-10V dim (120 to 277V)
Consult factory for additional options
Accessories (F) (optional)
HL - Honeycomb Louver



NODDLE

TECHNICAL INFORMATION





SPECIFICATIONS

CUT-OUT SIZE	Ø 3 9/16" min
MIN RECESSED HEIGHT	5"
WEIGHT	3.6 lb
INGRESS PROTECTION (IP)	IP20, IP20 inside
ROTATION	60°

LIGHT SPECIFICATIONS


LIGHT SOURCES	1 COB
CRI	90+
LIGHT SOURCE POWER	18W
LIGHT SOURCE OUTPUT	1800 LM

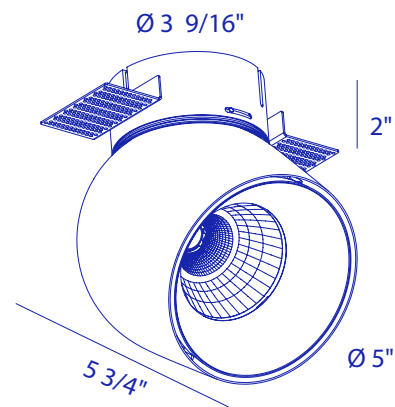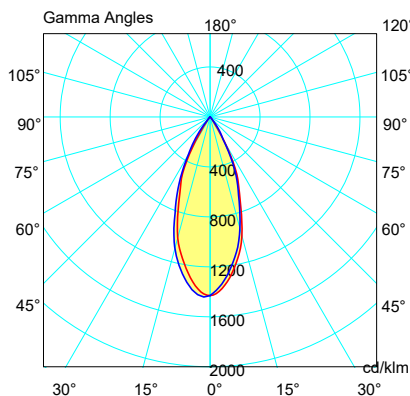

Note: Specification and lighting components are subject to change without notice.



Noddle in black exterior, dark chrome interior finish

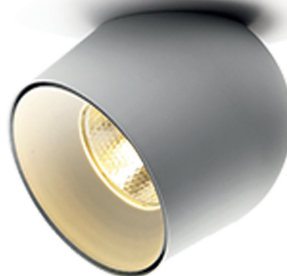

Noddle in black exterior, gold interior finish